

HSF

NOTES:
 Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃


Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 BK

Ordering Information


1125-12 XX XX Z XXX X 1

No. of Pins Per Row:02~40
 Contact Plating G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 Pin Length(Short) L=A1+B+2.8
 Standard:128=12.8
 Packing T=Tube
 P=Tube+CAP
 R=Tape&Reel+CAP



Item	Pin Length	A1	A	B	Mating
Standard	12.80	3.94	7.62	6.00	2171 2185
Alternate					

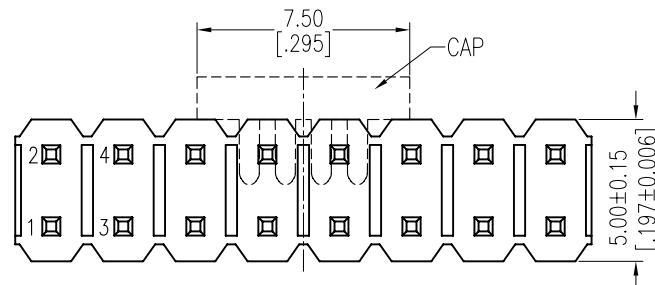


Dual Numbers

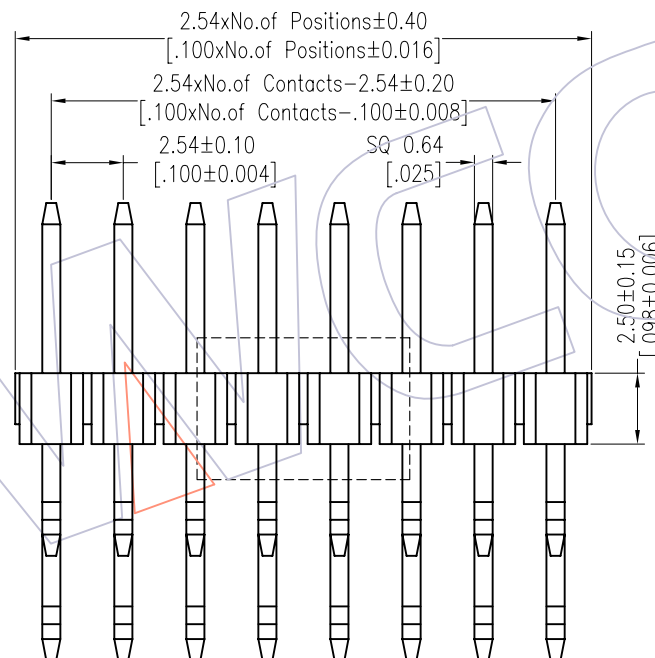

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

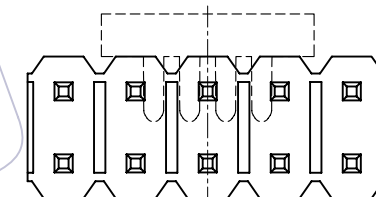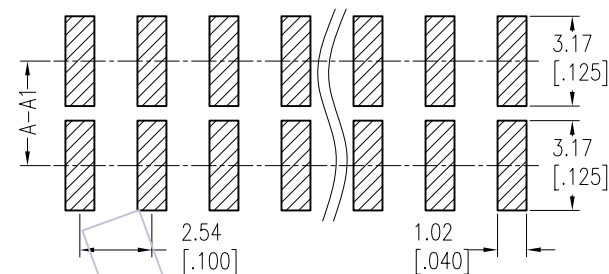

Odd Number

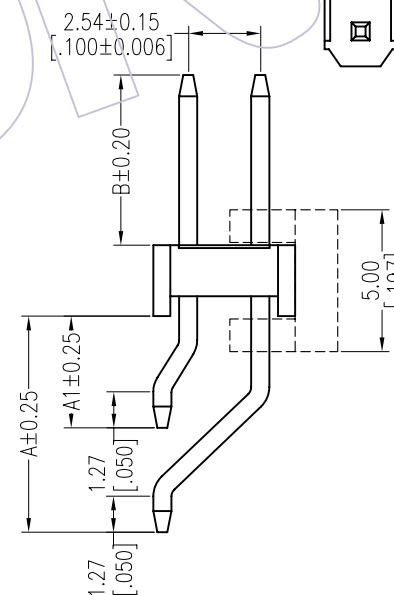

Item	Pin Length	A1	A	B	Mating
Standard	12.80	3.94	7.62	6.00	2171 2185
Alternate					

Item	Pin Length	A1	A	B	Mating
Standard	12.80	3.94	7.62	6.00	2171 2185
Alternate					

Item	Pin Length	A1	A	B	Mating
Standard	12.80	3.94	7.62	6.00	2171 2185
Alternate					

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com