

HSF





NOTES:

Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

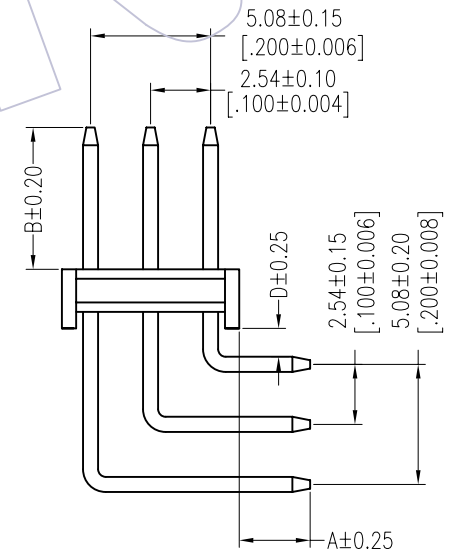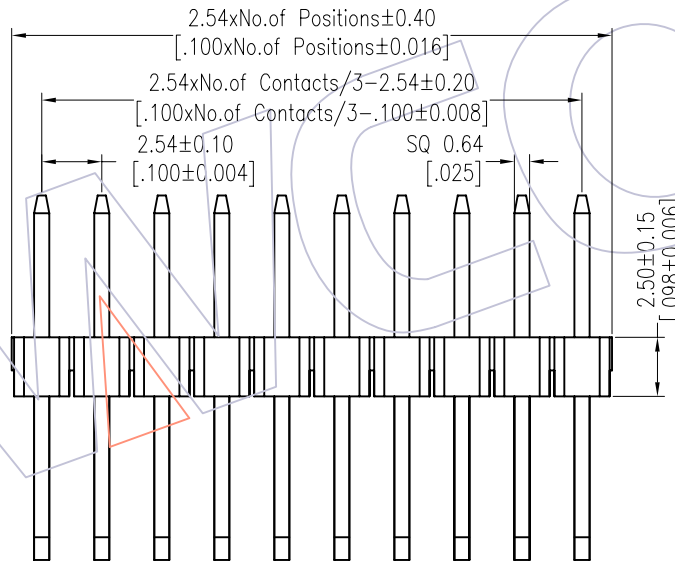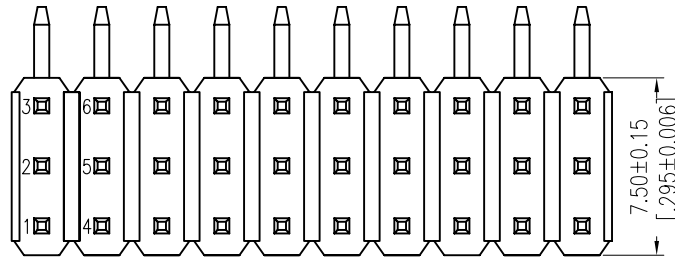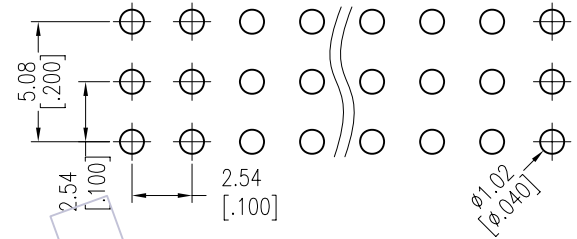

Ordering Information

1125-13 XX XX R XXX X 1

No. of Pins Per Row:03-40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin	Pin Length(Short) L=A+B+D+3.7 Standard:139=13.9	Packing 0=PE Bag T=Tube
------------------------------	---	---	-------------------------------

Item	Pin Length	A	D	B	Mating
Standard	13.90	3.00	1.20	6.00	2185
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				X.X ±0.40	William Chen	2013.02.28	UNIT	mm [inch]	1125-13XXXXRXXXXX
A1	2013/02/28	Modify Drawing	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: PH2.54 THREE ROW 90° CONCAVE BENDING H=2.5
AO	2012/06/16	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--