


# HSF

**NOTES:**

Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

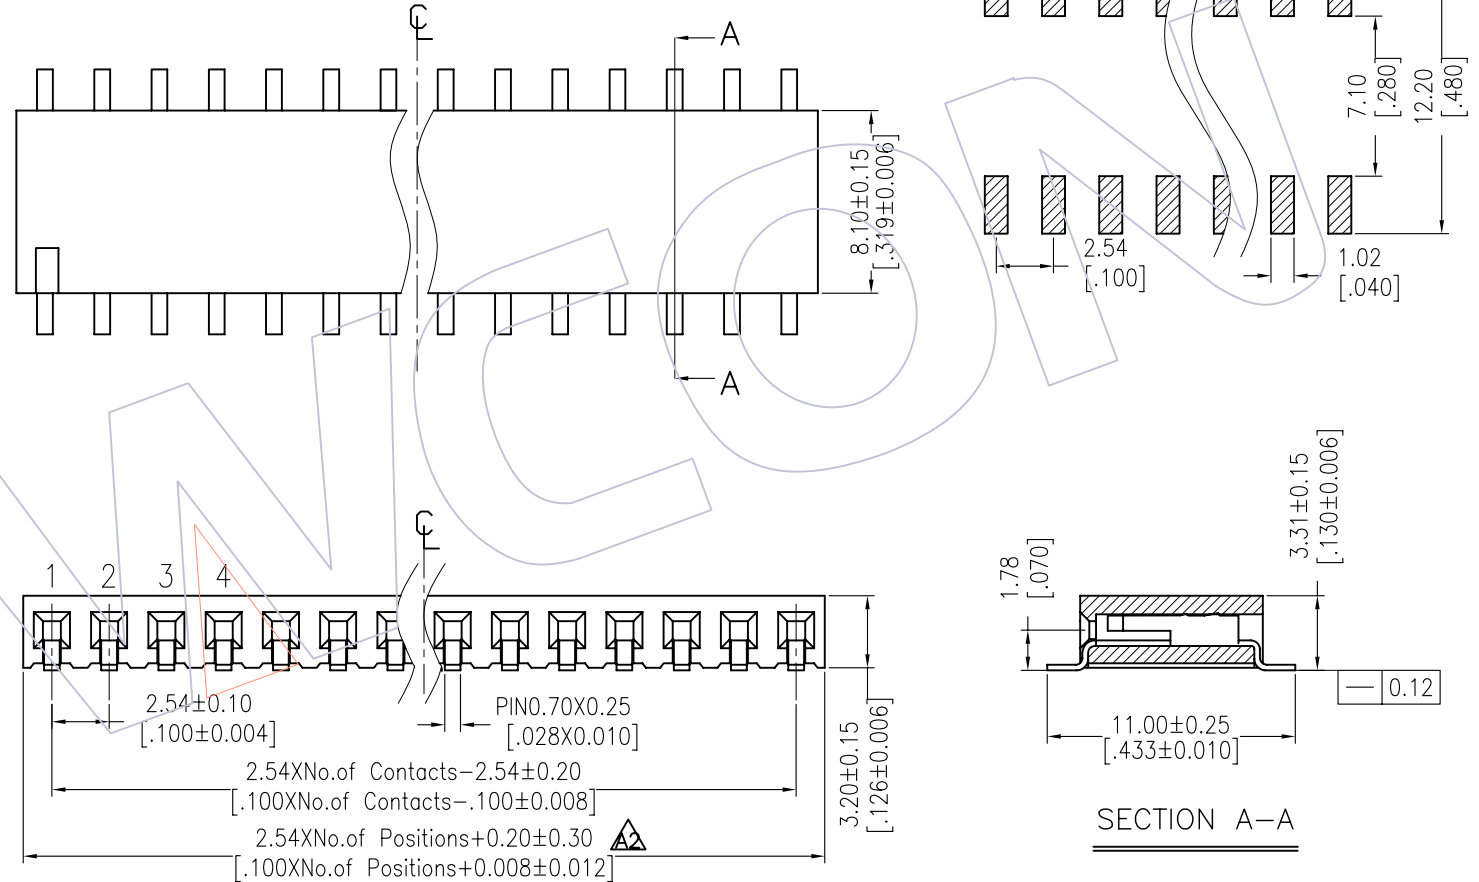

## Ordering Information

2134 - 1 XX M XX CUN X 1

No. of Pins per ROW: 02-40PIN

Contact Plating:

G0=Gold Flash

G3=10μ"Gold

G4=15μ"Gold

G5=30μ"Gold

S0=Gold Flash/Tin

S3=10μ"Gold/Tin

S4=15μ"Gold/Tin

S5=30μ"Gold/Tin

SN=Tin

SM=Matte Tin

Packing:

T=Tube

R=Tape&Reel

| Item      | Pitch | Mating |
|-----------|-------|--------|
| Standard  | 2.54  | 1125B  |
| Alternate |       |        |



| REV | DATE       | MODIFICATION DESCRIPTION | CHANGE | OPERATION   | DRAW    | DATE       | SCALE | FIT | PART NO.                                       |
|-----|------------|--------------------------|--------|-------------|---------|------------|-------|-----|--|
| A2  | 2012/09/20 | MODIFY ADD +0.20         |        | x.x ±0.40   | JYHuang | 2012/09/20 | UNIT  | mm  | 2134-1XXMXXCUNX1                               |
| A1  | 2012/08/24 | Change the mating object |        | x.xx ±0.25  | CHECK   | DATE       | SIZE  | A4  | TITLE:   |
| A0  | 2012/08/02 | NEW                      | -----  | x.xxx ±0.15 | APPROVE | DATE       | SHEET | 1/1 | FH2.54 SINGLE ROW 180° SMT<br>SIDE ENTER H=3.2 |
|     |            |                          |        | Angle ± 3'  |         |            | PROJ. |     | Customer NO.                                   |
|     |            |                          |        | DIM TOL     |         |            |       |     |  |

**WCON**  
 Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: salesks@wcon.com