

HSF

NOTES:


Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0


Ordering Information

2135 - 2 XX M XX CUN X X



No. of Pins per ROW: 02-40PIN	Contact Plating: G0=Gold Flash G3=10μ"Gold G4=15μ"Gold G5=30μ"Gold S0=Gold Flash/Tin S3=10μ"Gold/Tin S4=15μ"Gold/Tin S5=30μ"Gold/Tin SN=Tin SM=Matte Tin	Packing: T=Tube P=Tube+CAP R=Tape&Reel+CAP	Series No. 1=TYPE 1 2=TYPE 2
-------------------------------	--	---	------------------------------------

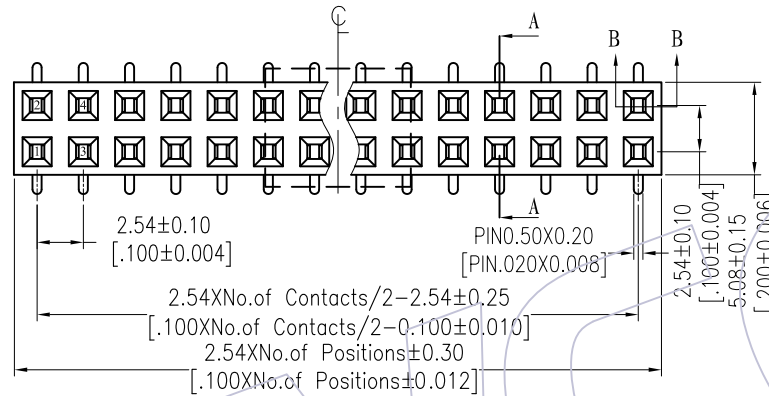

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

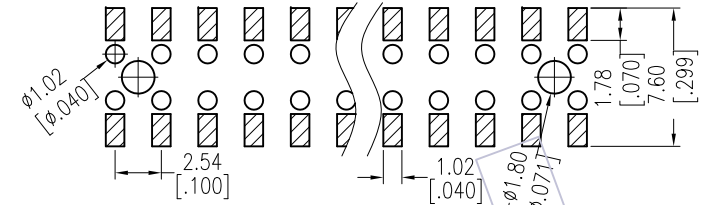

Special CAP for 2*2P-2*4P

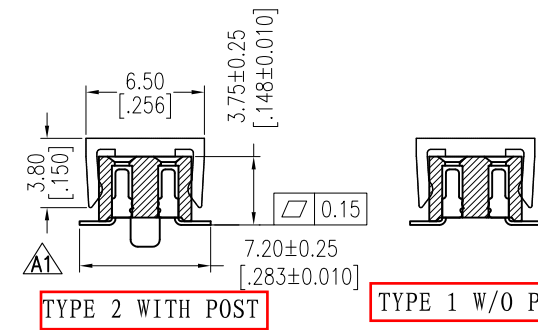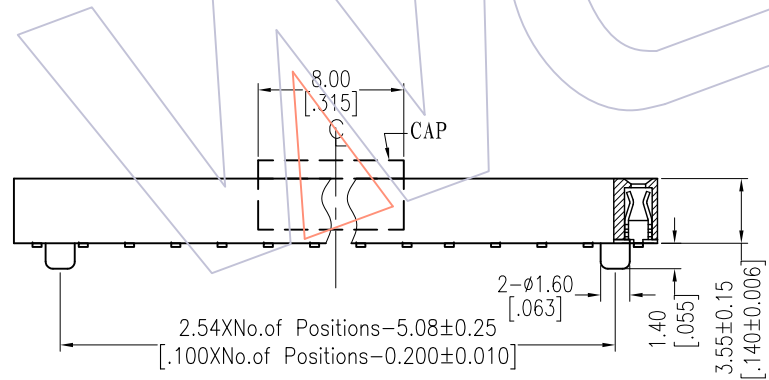

TYPE 2 WITH POST

TYPE 1 W/O POST

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

SECTION B-B

TITLE	PART NO.
TYPE 1	2135-2XXMXXCUNX1
TYPE 2	2135-2XXMXXCUNX2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW Wang	DATE 2013/06/17	SCALE UNIT	FIT mm	PART NO. SEE TABLE
				X.X	±0.40					
A1	13/06/17	Modify CAP 4.30 → 3.80	-----	X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: FH2.54mm DUAL ROW 180° SMT H=3.50
A0	12/08/02	NEW	-----	X.XXX	±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle	± 3°			PROJ.		
				DIM	TOL					