

HSF

NOTES:

Current Rating: 3.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 1000V AC/DC

Insulation Resistance: 1000MΩ Min

Operation Temperature: -40℃ to +105℃

Contact Material: Phosphor Bronze

Contact plating: Au Or Sn over Ni

Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

2150 - 1 XX W XX CUNT X

No. of Pins per
ROW: 02-40PIN

Contact Plating:

G0=Gold Flash

G3=10μ"Gold

G4=15μ"Gold

G5=30μ"Gold

S0=Gold Flash/Tin

S3=10μ"Gold/Tin

S4=15μ"Gold/Tin

S5=30μ"Gold/Tin

SN=Tin

SM=Matte Tin

Packing:


T=Tube

Series No.



1=TYPE 1

2=TYPE 2

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

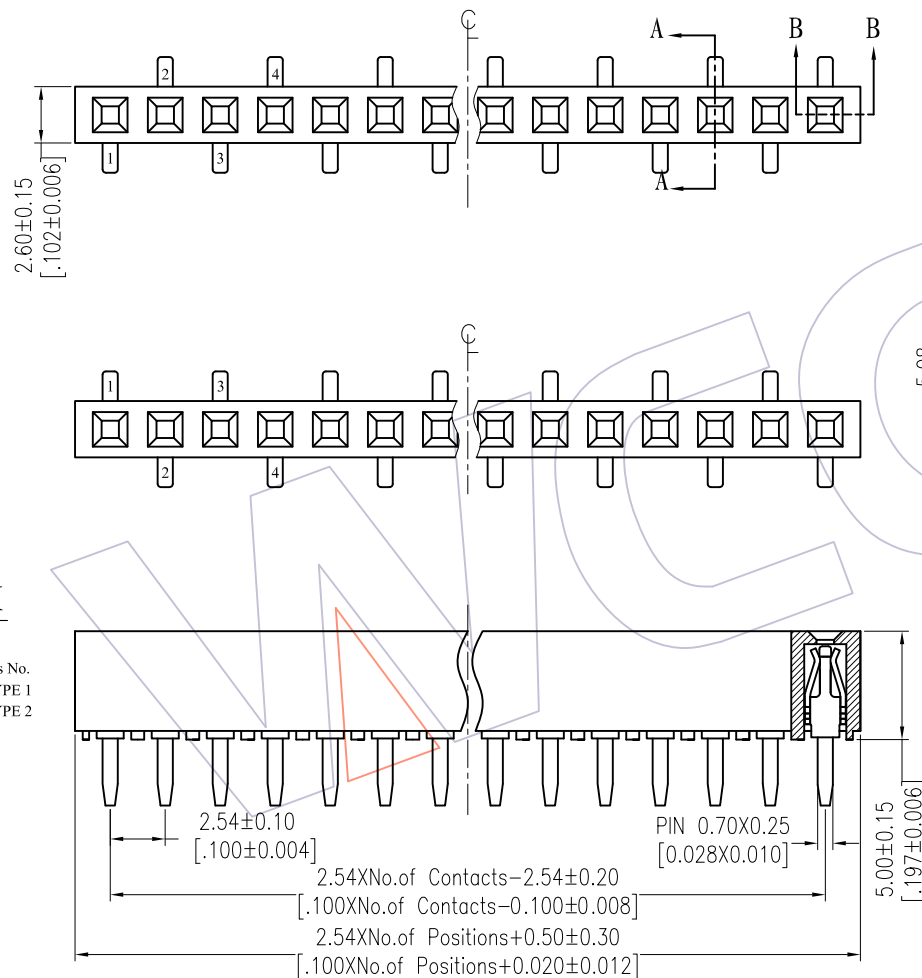

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ±0.05)

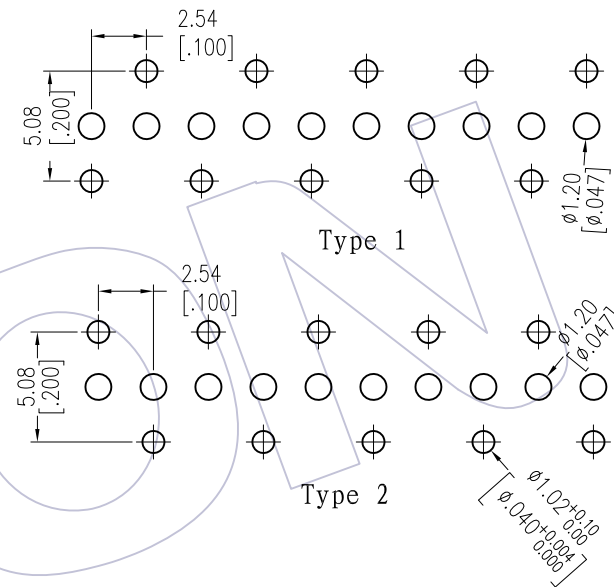

SECTION: A-A

TITLE	PART NO.
TYPE 1	2150-1XXWXXCUNT1
TYPE 2	2150-1XXWXXCUNT2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2014/05/03	Modify drawing	-----	X.X ±0.40	Wang	2014/05/03	UNIT	mm	SEE TABLE
A0	2012/08/04	NEW	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	FH2.54 SINGLE ROW Centipede H=5.0
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					