

HSF

NOTES:

Current Rating: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
Contact plating: Au Or Sn over Ni
Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information


2150T-2 XX W XX CUN X 1

No. of Pins per
ROW: 02-40PIN



Contact Plating:
G0=Gold Flash
G3=10μ"Gold
G4=15μ"Gold
G5=30μ"Gold
S0=Gold Flash/Tin
S3=10μ"Gold/Tin
S4=15μ"Gold/Tin
S5=30μ"Gold/Tin
SN=Tin
SM=Matte Tin

Packing:
T=Tube

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

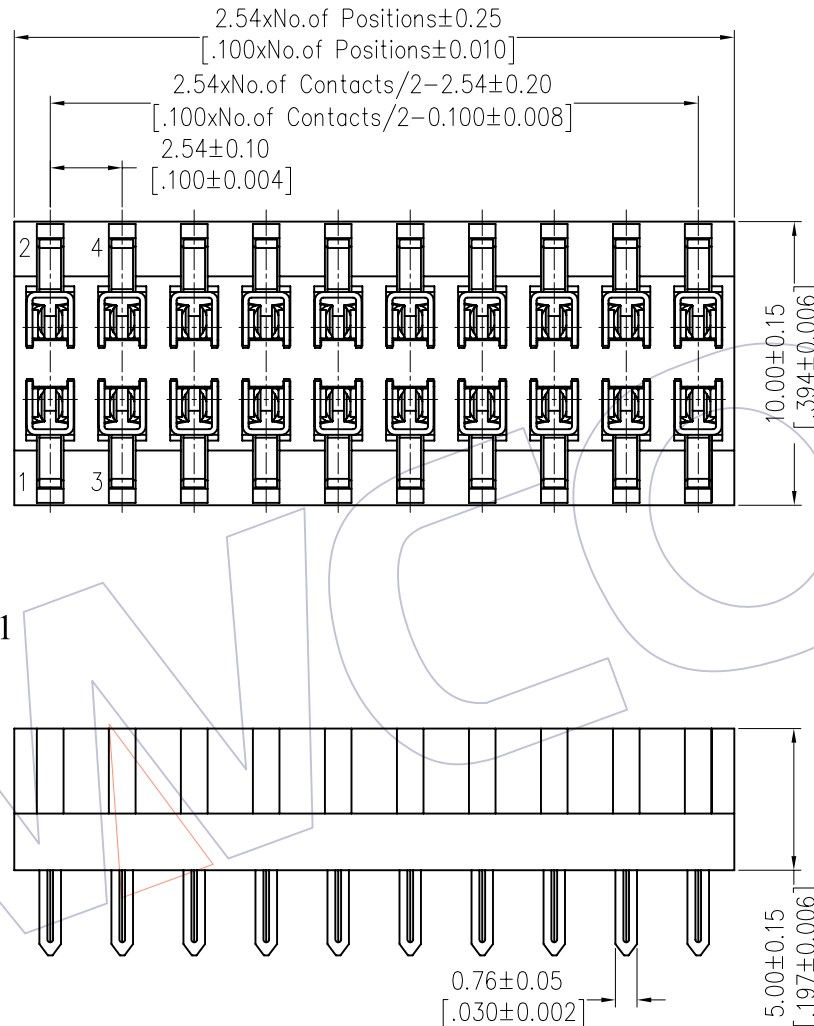

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

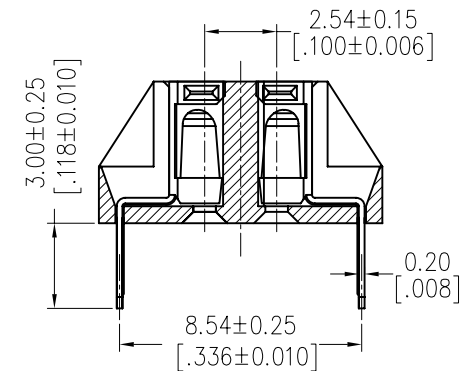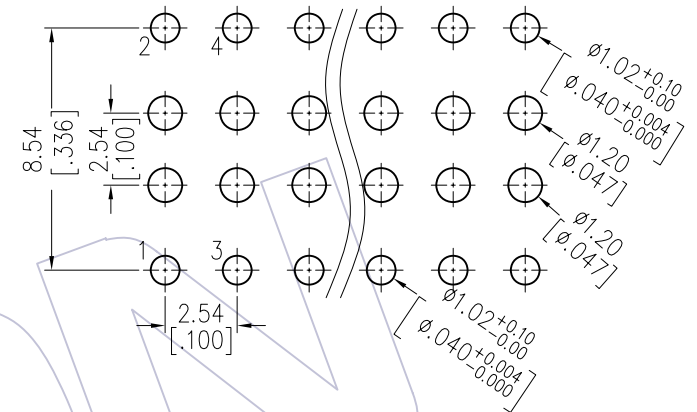

				OPERATION		DRAW	DATE	SCALE	FIT	PART NO.			
				x.x	±0.40	JYHuang	2012/08/06	UNIT	mm	2150T-2XXWXXCUNX1			
				x.xx	±0.25	CHECK	DATE	SIZE	A4	TITLE: FH2.54 Double Row Centipede Feet H=5.0 Top Enter			
				x.xxx	±0.15			SHEET	1/1				
A0	2012/08/06	NEW		-----	Angle	± 3°	APPROVE	DATE	PROJ.		Customer NO.		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL							