

HSF

NOTES:

Current Rating: 3.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 1000V AC/DC Δ

Insulation Resistance: 1000MΩ Min

Operation Temperature: -40°C to +105°C

Insulator Material: PBT+30%G.F UL94V-0

Mated with: 3210 Series


Used with: 3210-T

Ordering Information

3210 - H XX B 01

No. of pins
10P~40P

Color
E=Beige
W=White
B=Black

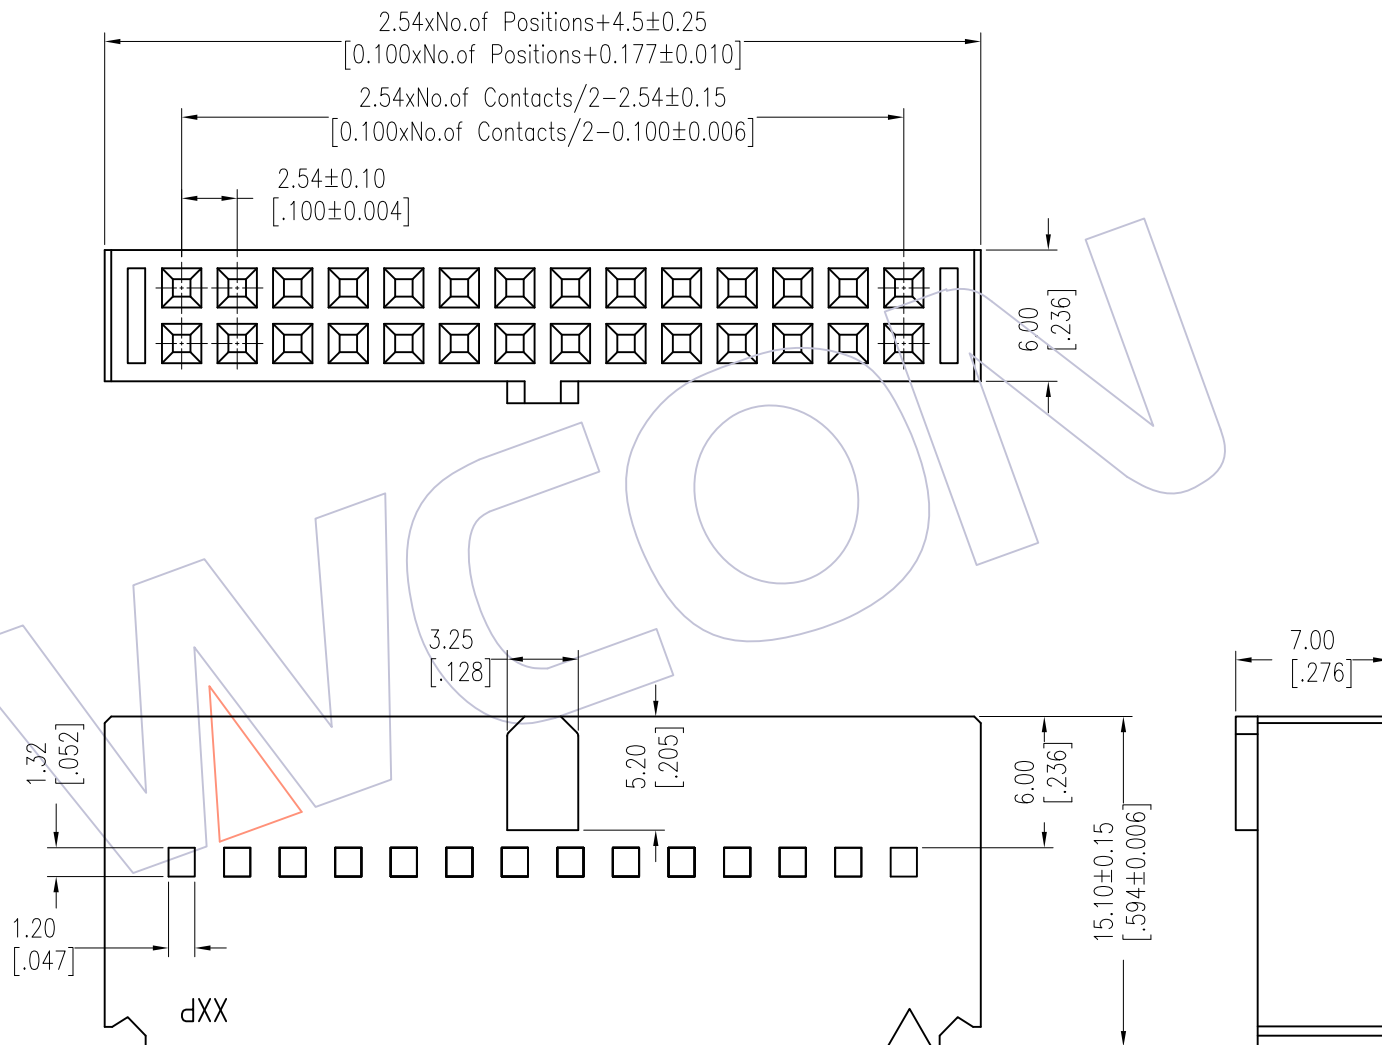

				OPERATION		DRAW Tsingsn	DATE 2013/02/25	SCALE	FIT	PART NO. 3210-HXXB01
				x.x	±0.40			UNIT	mm	
A1	2013/02/25	Modify	Δ	x.xx	±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.54mm" T" TYPE HOUSING H=15.10
A0	2012/10/08	NEW	-----	x.xxx	±0.15	APPROVE	DATE	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.	Φ	Customer NO.