

# HSF

**NOTES:**


Rated Current:3.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PBT+30%G.F UL94V-0 BK(std)  
 or PA9T+30%G.F UL94V-0 BK




## Ordering Information

1125-22 XX XX S XXX X X


No. of Pins Per Row:02-40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin	Pin Length L=A+B+C	Packing 0=PE Bag Standard: T=Tube 2=Type 2 .....	Series No. 1=Type 1 2=Type 2
------------------------------	---	-----------------------	--	------------------------------------

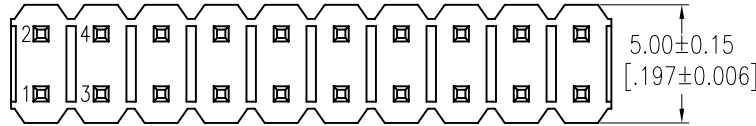

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

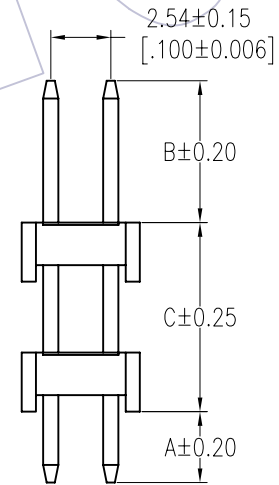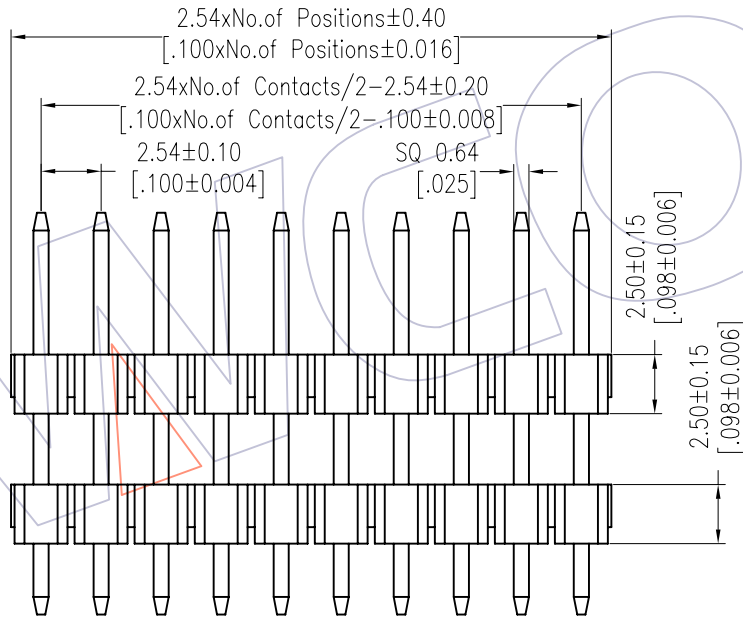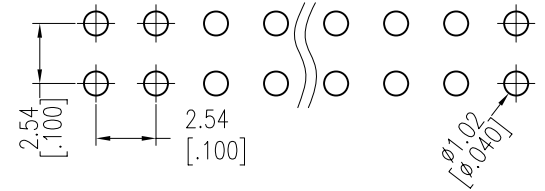

TYPE 1

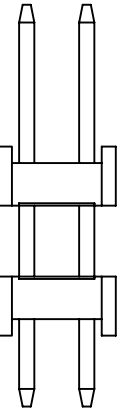

TYPE 2

Item	Pin Length	A	B	C	Mating
Standard	----	3.00	6.00	----	2171 2185
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				x.X ±0.40	William Chen	2012.05.28	UNIT	mm	1125-22XXXXSXXXXX
				x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.54 DUAL ROW DOUBLE PLASTIC 180° H=2.5
				Angle ± 3'			PROJ.	⊕	Customer NO.
				DIM TOL					



Http: [www.wcon.com](http://www.wcon.com)

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: <a href="mailto:sales@wcon.com">sales@wcon.com</a>	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: <a href="mailto:salesks@wcon.com">salesks@wcon.com</a>
---	--