



HSF

NOTES:
 Rated Current: 3.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -55°C to +125°C


Contact Material: Brass
 Contact plating: Au Or Sn Over Ni
 Insulator Material: LCP+30%G.F (UL94V-0)

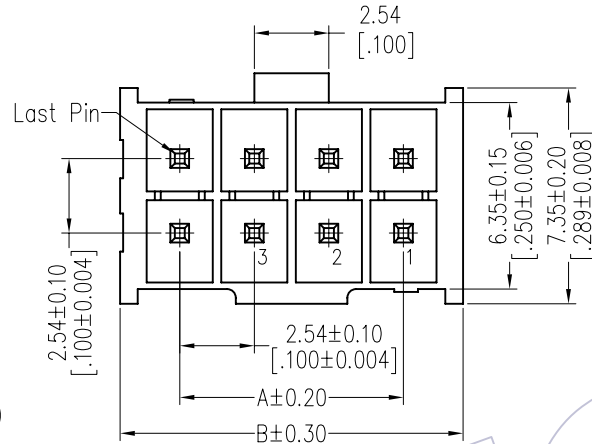

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

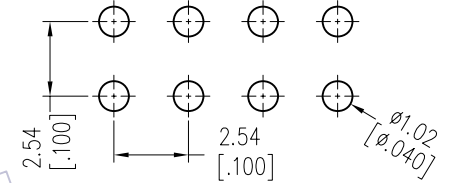

Circuit	Part No.	Dimension	
		A	B
2x02	WF2549-2WS02X01	2.54	6.60
2x03	WF2549-2WS03X01	5.08	9.14
2x04	WF2549-2WS04X01	7.62	11.68
2x05	WF2549-2WS05X01	10.16	14.22
2x06	WF2549-2WS06X01	12.70	16.76
2x07	WF2549-2WS07X01	15.24	19.30
2x08	WF2549-2WS08X01	17.78	21.84
2x09	WF2549-2WS09X01	20.32	24.38
2x10	WF2549-2WS10X01	22.86	26.92
2x11	WF2549-2WS11X01	25.40	29.46
2x12	WF2549-2WS12X01	27.94	32.00
2x13	WF2549-2WS13X01	30.48	34.54
2x14	WF2549-2WS14X01	33.02	37.08
2x15	WF2549-2WS15X01	35.56	39.62
2x16	WF2549-2WS16X01	38.10	42.16
2x17	WF2549-2WS17X01	40.64	44.70
2x18	WF2549-2WS18X01	43.18	47.24
2x19	WF2549-2WS19X01	45.72	49.78
2x20	WF2549-2WS20X01	48.26	52.32
2x21	WF2549-2WS21X01	50.80	54.86
2x22	WF2549-2WS22X01	53.34	57.40
2x23	WF2549-2WS23X01	55.88	59.94
2x24	WF2549-2WS24X01	58.42	62.48
2x25	WF2549-2WS25X01	60.96	65.02

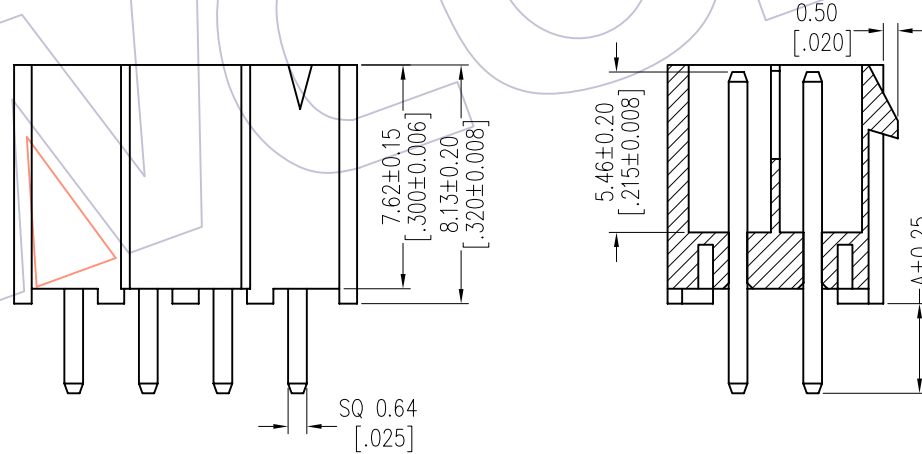

Ordering Information

WF2549 -2 WS XX X 0 1

- No. of Row
- No. of pins 02-25P
- Contact Plating
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 Blank=Tin
- Color
 B=Black
 E=Beige
 W=White
 T=Natural
- Packing
 0=PE Bag
 T=Tube

ITEM	A			
Standard	3.05	2x24	WF2549-2WS24X01	58.42 62.48
Alternate		2x25	WF2549-2WS25X01	60.96 65.02

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.
				X.X	±0.40					
				X.XX	±0.25	CHECK	DATE	SIZE	A4	SEE TAB
				X.XXX	±0.15	APPROVE	DATE	SHEET	1/1	TITLE: 2.54mm WAPER 180° DIP
				Angle	± 3'			PROJ.	Customer NO.	