
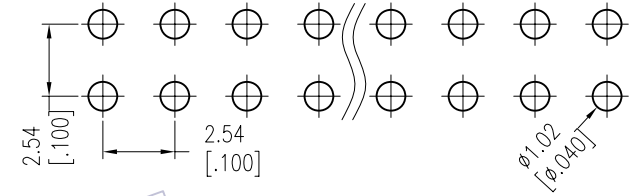


HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

NOTES:
 Rated Current: 3.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C



Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PBT+30%G.F UL94V-0 BK(std)
 or PA9T+30%G.F UL94V-0 BK

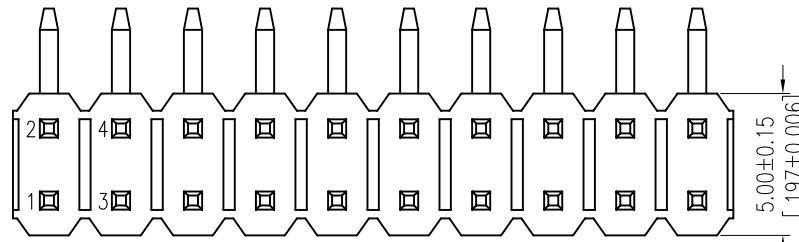

Ordering Information

1125-12 XX XX R XXX X 1

No. of Pins Per Row: 02-40
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin
 Pin Length(Short) L=A+B+D+3.75
 Standard: 110=11.0, 140=14.0, 148=14.8
 Packing: 0=PE Bag, T=Tube

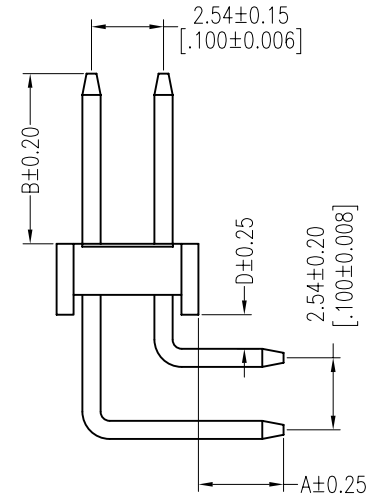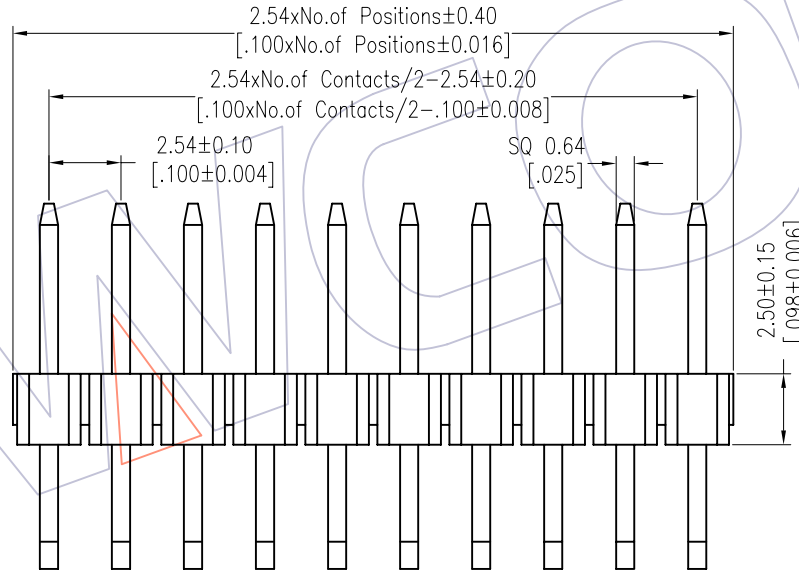

Item	Pin Length	A	D	B	Mating
Standard	11.00	3.00	1.20	3.00	2135
	14.00	3.00	1.20	6.00	2171 2185
	14.80	3.00	2.00	6.00	2171 2185
Alternate					

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ±0.40	William Chen	2012.05.28	UNIT mm		1125-12XXXXRXXXXX
X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: PH2.54 DUAL ROW 90° CONCAVE BENDING H=2.5
X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
Angle ± 3°			PROJ.		
DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE
A0	2012/05/28		NEW	-----