HSF

NOTES:
Current Rating: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material: Phosphor Bronze
Contact plating: Au Or Sn over Ni
Insulator Material: PA9T+30%G.F UL94V-0

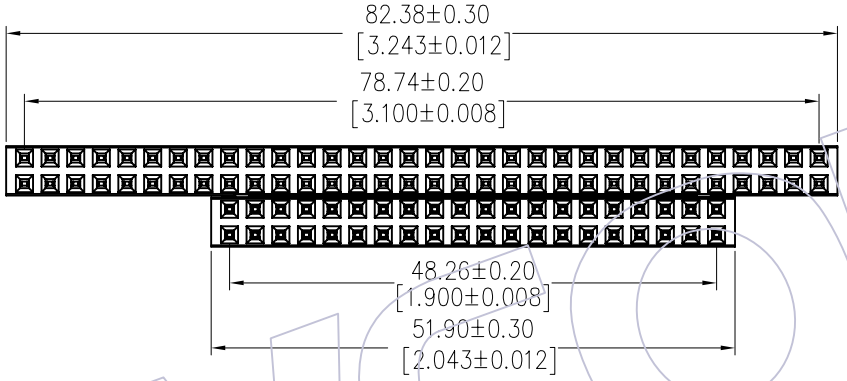

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

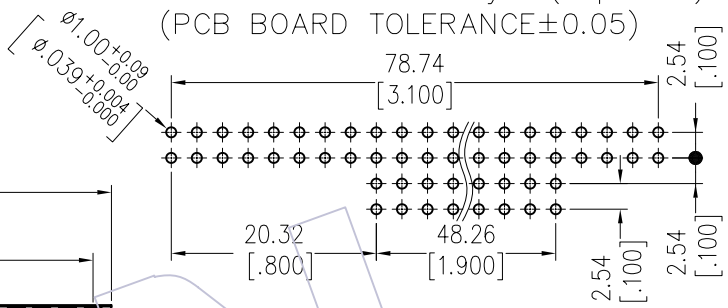

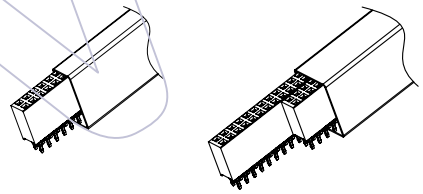

Ordering Information

2111P-2 XX S XX F Y N T 4

- No.of Pins per: 20P, 32P
- Contact Plating:
  - G1=Fully 3u"Gold
  - G3=Fully 10u"Gold
  - G4=Fully 15u"Gold
  - H1=Mating 3u"Gold Tail 1u"Gold
  - H3=Mating 10u"Gold Tail 3u"Gold
  - H4=Mating 15u"Gold Tail 3u"Gold
- Packing: T=Tube

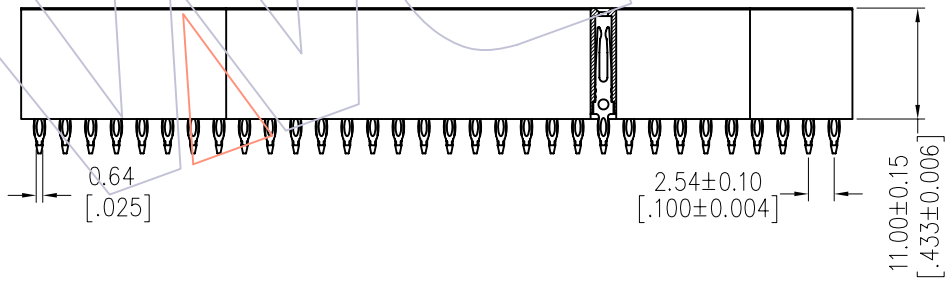

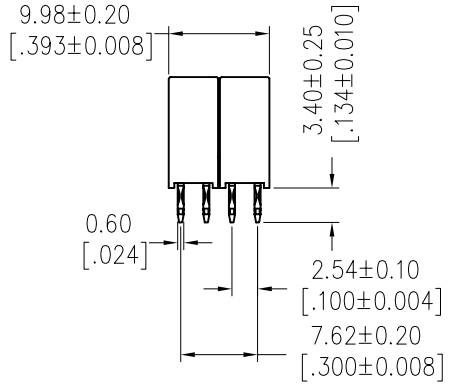

Item	Pitch	Mating
Standard	2.54	1125
Alternate		

ITEM	Pcs/Tube
2*20P	11
2*32P	7
2*20P+2*32P	7

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/08/20	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2012/08/20
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 2111P-2XXSXXFYNT4

TITLE: 2.54 PC104 2*20P+2*32P 180° H=11.0 DIP=3.4 PRESS FIT

Customer NO.

WCON