

HSF

NOTES:

Current Rating: 3.0AMP

Voltage Rating: 250V AC,DC

Contact Resistance: 20m Ω Max

Withstand Voltage: 800V AC/DC


Insulation Resistance: 1000M Ω Min

Operation Temperature: -25℃ to +85℃

Insulator Material: PA66 (UL94V-0)

Use with: WF2503-T

Mated With: WF2503-Wafer

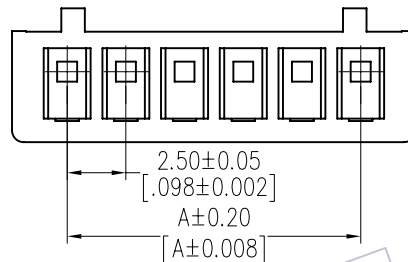



Ordering Information

WF2503-H XX X 01

No. of Pins
02P-25P

Color
W= White
B= Black
U= Blue
E= Beige

Packing
0=PE Bag

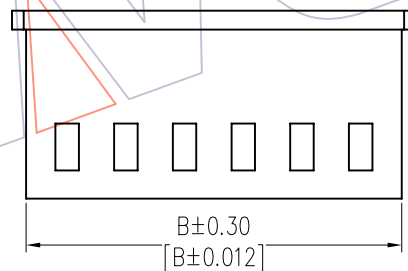

Specification & Ordering Information:

Circuit	Part No.	Dimension		Q'TY/ bag
		A	B	
02	WF2503-H02X01	2.50	6.00	1,000
03	WF2503-H03X01	5.00	8.50	1,000
04	WF2503-H04X01	7.50	11.00	1,000
05	WF2503-H05X01	10.00	13.50	1,000
06	WF2503-H06X01	12.50	16.00	1,000
07	WF2503-H07X01	15.00	18.50	1,000
08	WF2503-H08X01	17.50	21.00	1,000
09	WF2503-H09X01	20.00	23.50	1,000
10	WF2503-H10X01	22.50	26.00	1,000
11	WF2503-H11X01	25.00	28.50	1,000
12	WF2503-H12X01	27.50	31.00	1,000
13	WF2503-H13X01	30.00	33.50	1,000
14	WF2503-H14X01	32.50	36.00	1,000
15	WF2503-H15X01	35.00	38.50	1,000

				OPERATION		DRAW JYHuang	DATE 2012/09/05	SCALE	FIT	PART NO. SEE TAB	
				X.X	±0.40			UNIT	$\frac{\text{mm}}{\text{inch}}$		
				X.XX	±0.25	CHECK	DATE	SIZE	A4		
				X.XXX	±0.15			APPROVE	DATE	SHEET	
AO	2012/09/05	NEW	——	Angle	± 3°	DIM	TOL			PROJ.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE								