


HSF

NOTES:
Rated Current: 3.0AMP.
Rating Voltage: 250V AC/DC
Contact Resistance: 20mΩ Max.
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min.
Operation Temperature: -25℃ to +85℃

Insulator Material: PA66 UL94V-0
Use with: WF2541-T
Mated with: WF2541-Wafer

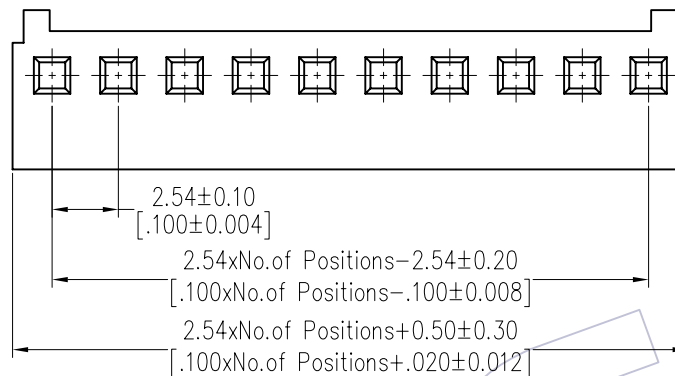



Ordering Information

WF2541 - H XX X 0 1

No. of Pins
02~16P

Colour
E= Beige

Packing
0= PE Bag

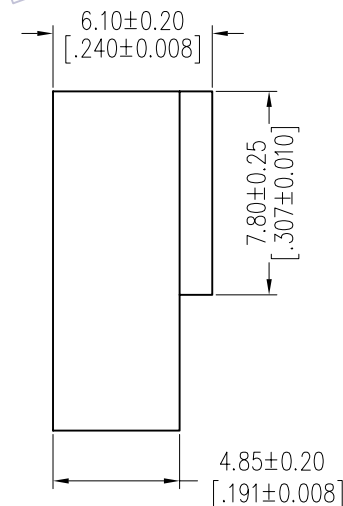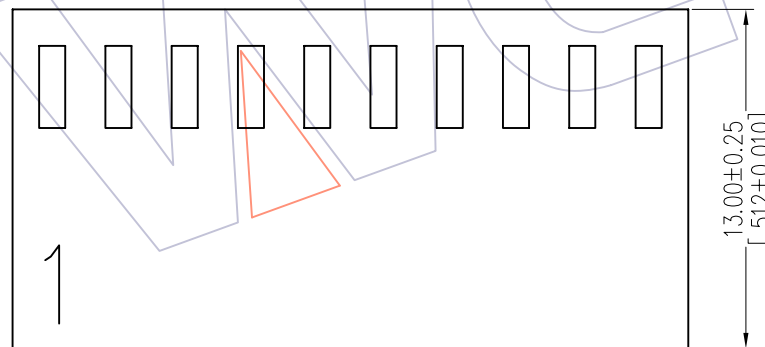

				OPERATION		DRAW JYHuang	DATE 2012/09/07	SCALE	FIT	PART NO. WF2541-HXXX01	
				X.X	±0.40			UNIT	$\frac{\text{mm}}{\text{inch}}$		
				X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: "M" TYPE 2.54mm Housing	
				X.XXX	±0.15			SHEET	1/1		
AO	2012/09/07	NEW	—	Angle	± 3'	APPROVE	DATE	SHEET	1/1	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.			