


HSF

NOTES:
 Rated Current: 5.0A
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1500V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C


Insulator Material: PA66
 Used with: WF3001-MT(Male Terminal)

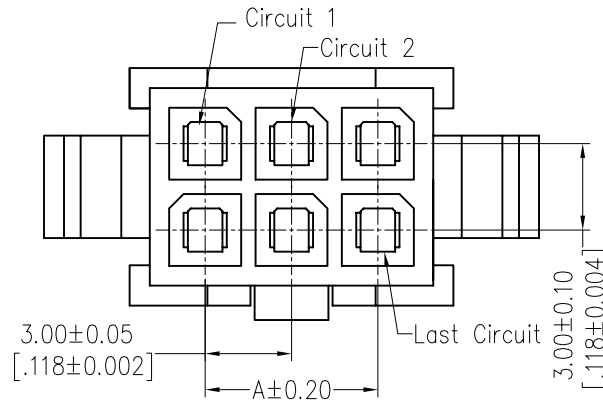

Ordering Information

WF 3001 - 2 H K XX B 0 1

No. of row: Dual Row
 No. of pins: 01~12pin
 Color: E=Beige, W=White, B=Black
 Packing: 0=PE Bag

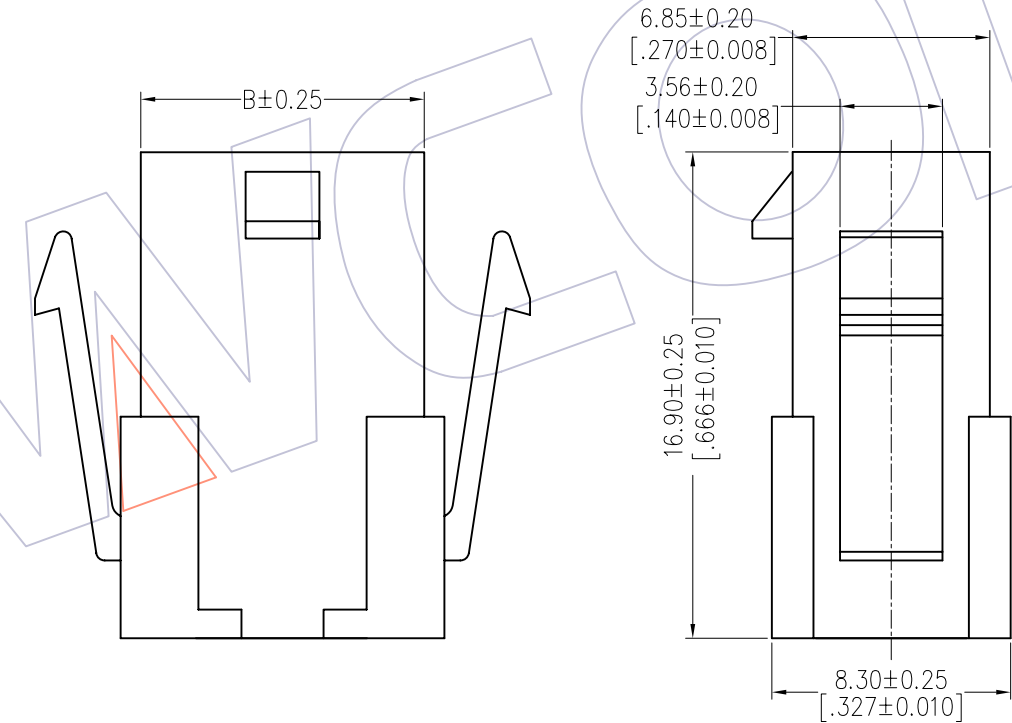

Specification & Ordering Information:

| Circuit | Part No. | Dimension | |
|---------|-----------------|-----------|-------|
| | | A | B |
| 02 | WF3001-2HK01B01 | --- | 3.85 |
| 04 | WF3001-2HK02B01 | 3.00 | 6.85 |
| 06 | WF3001-2HK03B01 | 6.00 | 9.85 |
| 08 | WF3001-2HK04B01 | 9.00 | 12.85 |
| 10 | WF3001-2HK05B01 | 12.00 | 15.85 |
| 12 | WF3001-2HK06B01 | 15.00 | 18.85 |
| 14 | WF3001-2HK07B01 | 18.00 | 21.85 |
| 16 | WF3001-2HK08B01 | 21.00 | 24.85 |
| 18 | WF3001-2HK09B01 | 24.00 | 27.85 |
| 20 | WF3001-2HK10B01 | 27.00 | 30.85 |
| 22 | WF3001-2HK11B01 | 30.00 | 33.85 |
| 24 | WF3001-2HK12B01 | 33.00 | 36.85 |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | | DRAW | DATE | SCALE | FIT | PART NO. |
|-----|------|--------------------------|--------|-----------|-------|---------|------|-------|------------|-----------------------------------|
| | | | | X.X | ±0.40 | | | | | |
| | | | | X.XX | ±0.25 | CHECK | DATE | UNIT | mm inch | SEE TAB |
| | | | | X.XXX | ±0.15 | APPROVE | DATE | SIZE | A4 | TITLE: 3.00mm DUAL ROW HOUSING |
| | | | | Angle | ± 3' | | | SHEET | 1/1 | Customer NO. |
| | | | | DIM | TOL | | | PROJ. | | |