


HSF

NOTES:
 Rated Current: 5.0A
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1500V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C


Insulator Material: PA66
 Used with: WF3001-MT(Male Terminal)

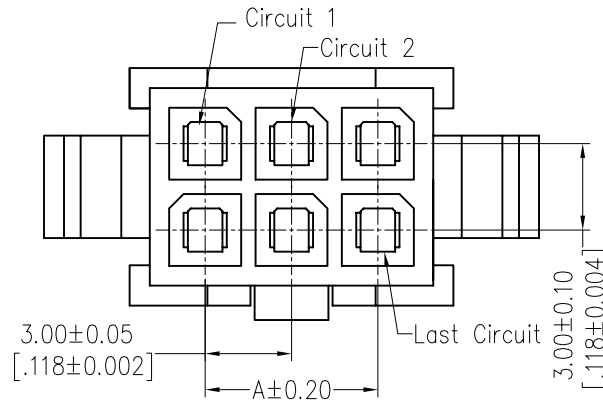

Ordering Information

WF 3001 - 2 H K XX B 0 1

No. of row: Dual Row
 No. of pins: 01~12pin
 Color: E=Beige, W=White, B=Black
 Packing: 0=PE Bag

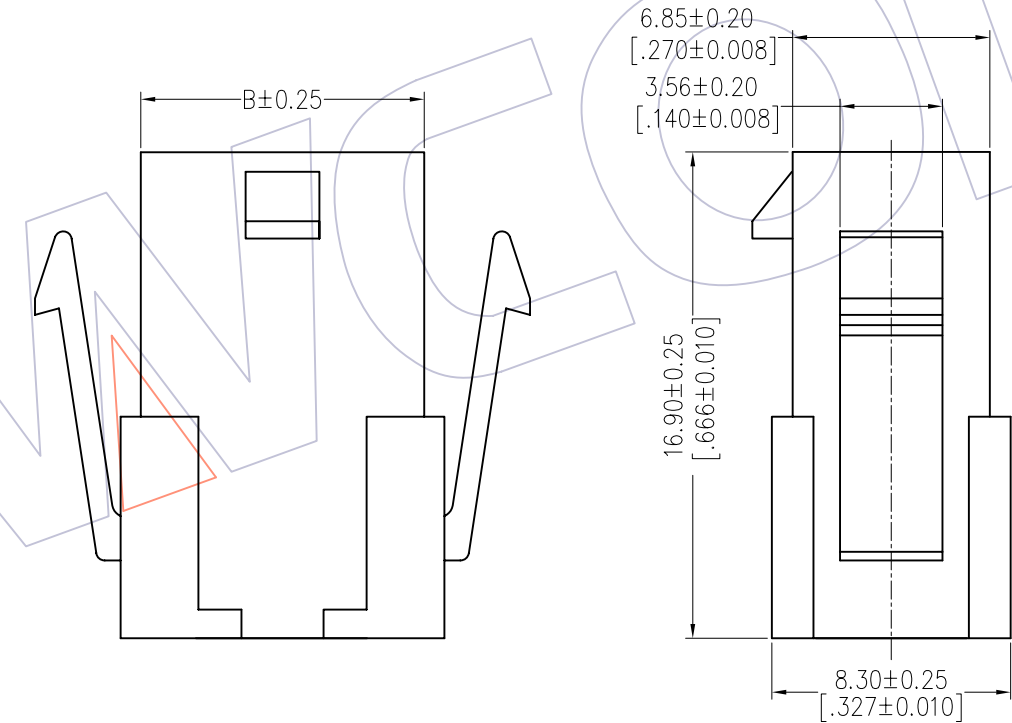

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
02	WF3001-2HK01B01	---	3.85
04	WF3001-2HK02B01	3.00	6.85
06	WF3001-2HK03B01	6.00	9.85
08	WF3001-2HK04B01	9.00	12.85
10	WF3001-2HK05B01	12.00	15.85
12	WF3001-2HK06B01	15.00	18.85
14	WF3001-2HK07B01	18.00	21.85
16	WF3001-2HK08B01	21.00	24.85
18	WF3001-2HK09B01	24.00	27.85
20	WF3001-2HK10B01	27.00	30.85
22	WF3001-2HK11B01	30.00	33.85
24	WF3001-2HK12B01	33.00	36.85

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.
				X.X	±0.40					
				X.XX	±0.25	CHECK	DATE	UNIT	mm inch	SEE TAB
				X.XXX	±0.15			SIZE	A4	TITLE: 3.00mm DUAL ROW HOUSING
AO	2012/09/20	NEW		Angle	± 3'	APPROVE	DATE	SHEET	1/1	Customer NO.
				DIM	TOL			PROJ.	☉	