
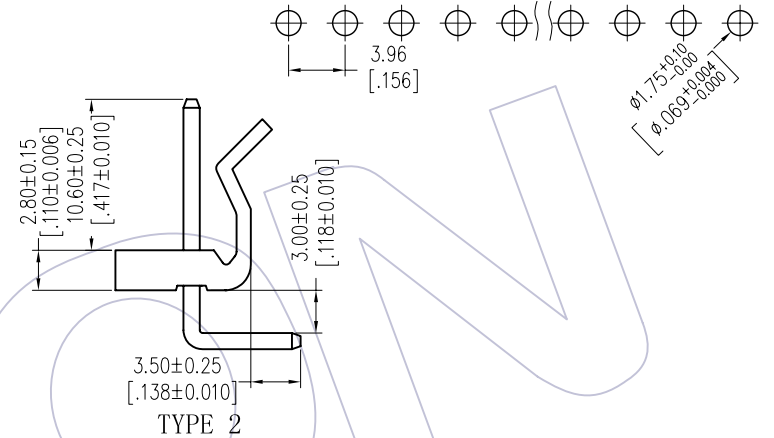


# HSF

NOTES:  
 Current Rating: 5.0AMP  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance:  
 Withstand Voltage: 1000V AC/minute  
 Operation Temperature: -25°C to +85°C

Contact Material: Brass  
 Contact plating: Au Or Sn Over Ni  
 Insulator Material: PA66 Or PA46

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE ±0.05)


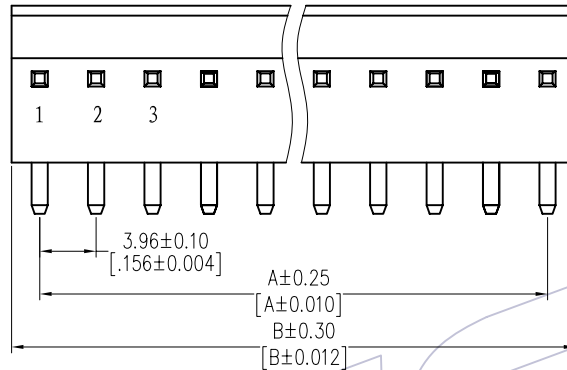


Specification & Ordering Information:

## Ordering Information

WF3961 -WR H XX W 0 X

H=PA46  
 Blank=PA66  
 Contact Plating  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin  
 G0=Gold Flash  
 G3=10u"Gold  
 G4=15u"Gold  
 G5=30u"Gold  
 Blank=Tin  
 No. of pins  
 02-15P  
 Color  
 B=Black  
 W=White  
 Series No.  
 1=Type 1  
 2=Type 2  
 Packing  
 0=PE Bag

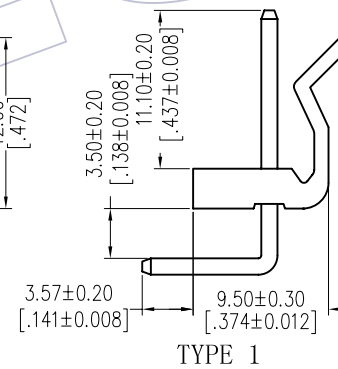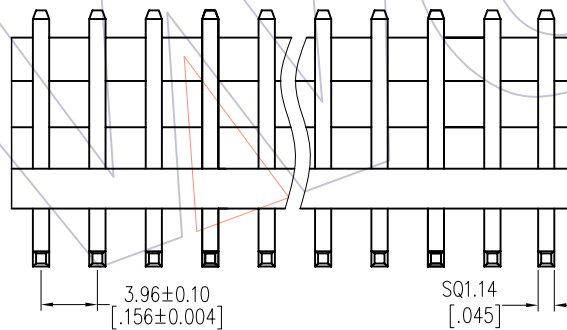

TYPE	PART NO.
TYPE 1	WF3961-WRXXW01
TYPE 2	WF3961-WRXXW02

Circuit	Part No.	Dimension		Q'TY/ bag
		A	B	
02	WF3961-WR02W0X	3.96	7.92	700
03	WF3961-WR03W0X	7.92	11.88	600
04	WF3961-WR04W0X	11.88	15.84	450
05	WF3961-WR05W0X	15.84	19.80	350
06	WF3961-WR06W0X	19.80	23.76	300
07	WF3961-WR07W0X	23.76	27.72	250
08	WF3961-WR08W0X	27.72	31.68	200
09	WF3961-WR09W0X	31.68	35.64	180
10	WF3961-WR10W0X	35.64	39.60	150
11	WF3961-WR11W0X	39.60	43.56	120
12	WF3961-WR12W0X	43.56	47.52	90
13	WF3961-WR13W0X	47.52	51.48	70
14	WF3961-WR14W0X	51.48	55.44	50
15	WF3961-WR15W0X	55.44	59.40	30

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X	JYHuang	2012/09/11	UNIT	mm inch	SEE TAB
				X.XX	CHECK	DATE	SIZE	A4	TITLE:
				X.XXX	APPROVE	DATE	SHEET	1/1	"M"TYPE 3.96 WAFER 90°
				Angle DIM	± 3' TOL		PROJ.	☉	Customer NO.