
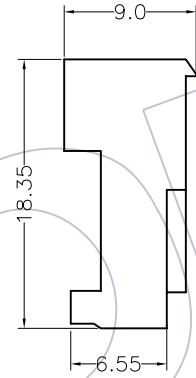


HSF

NOTES:
Current Rating:7.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-25℃ to +85℃

Contact Material:Phosphor bronze
Contact Plating:Tin Plated or leFlash
Insulator Material:PA66+30%GF(UL94V-0)

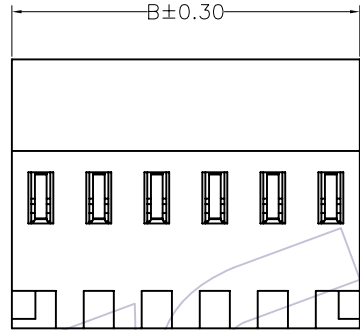


Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
02	WF3964-H02X01	3.96	7.92
03	WF3964-H03X01	7.92	11.88
04	WF3964-H04X01	11.88	15.84
05	WF3964-H05X01	15.84	19.80
06	WF3964-H06X01	19.80	23.76
07	WF3964-H07X01	23.76	27.72
08	WF3964-H08X01	27.72	31.68
09	WF3964-H09X01	31.68	35.64
10	WF3964-H10X01	35.64	39.60
11	WF3964-H11X01	39.60	43.56
12	WF3964-H12X01	43.56	47.52
13	WF3964-H13X01	47.52	51.48
14	WF3964-H14X01	51.48	55.44
15	WF3964-H15X01	55.44	59.40
16	WF3964-H16X01	59.40	63.36
17	WF3964-H17X01	63.36	67.32
18	WF3964-H18X01	67.32	71.28
19	WF3964-H19X01	71.28	75.24
20	WF3964-H20X01	75.24	79.20

Ordering Information

WF3964-H XX X 0 1

No.of Pins
02P-20P
Color
W= White
B= Black
R= Red
Packing
0=PE Bag

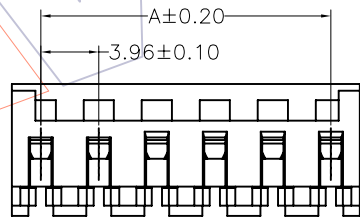

Colour	AWG
Natural	#18
Red	#18
Yellow	#20
Orange	#22
White	#24

					OPERATION	DRAW	WEIXD	08/07/23	SCALE	3:1	
					X.X ±0.40				UNIT	mm	
					X.XX ±0.25	DESIGN			SIZE	A4	
					X.XXX ±0.15	CHECK			SHEET	1/1	
AO	08/07/23		NEW		Angle ± 3'				PROJ.		
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	DIM TOL	APPROVE					