


HSF

NOTES:

Current Rating: 7.0AMP
Contact Resistance: 30mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40℃ to +105℃

Contact Material: Phosphor Bronze
Contact plating: Sn over Ni
Insulator Material: LCP+30%G.F UL94V-0

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

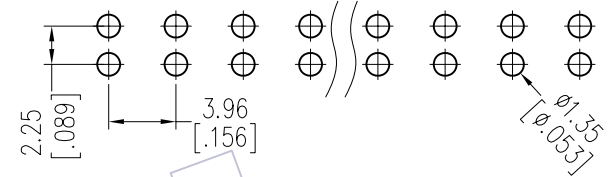



Ordering Information

2889 - 1 XX S XX DUNT 1

No. of Pins per
ROW: 02-30PIN

SN= Tin
SM= Matte Tin

Packing:
T= Tube

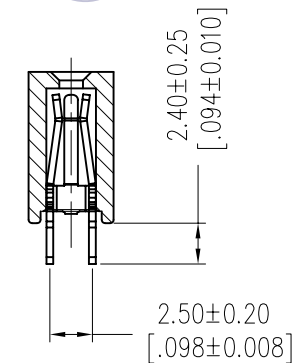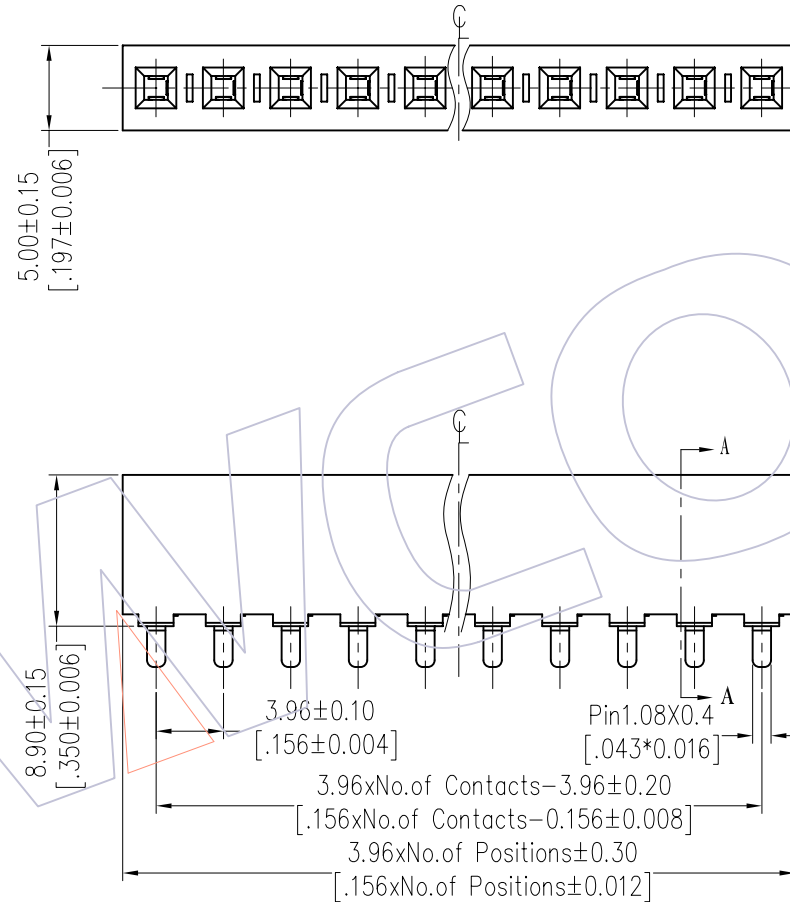

SECTION "A-A"

Item	Pitch	Mating
Standard	3.96	1832
Alternate		

				OPERATION		DRAW JYHuang	DATE 2012/08/18	SCALE UNIT	FIT mm	PART NO. 2889-1XXSXXDUNT1	
				X.X	±0.40					TITLE: FH3.96 SINGLE ROW 180° DIP H=8.0	
				X.XX	±0.25	CHECK	DATE	SIZE A4	SHEET 1/1	Customer NO.	
				X.XXX	±0.15						
				Angle	± 3°	APPROVE	DATE	PROJ.	PROJ.		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM TOL						
AO	2012/08/18	NEW		-----							