



HSF

NOTES:

Rated Current: 7.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au OR Sn Over Ni
 Insulator Material: LCP+30%G.F UL94V-0 BK


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

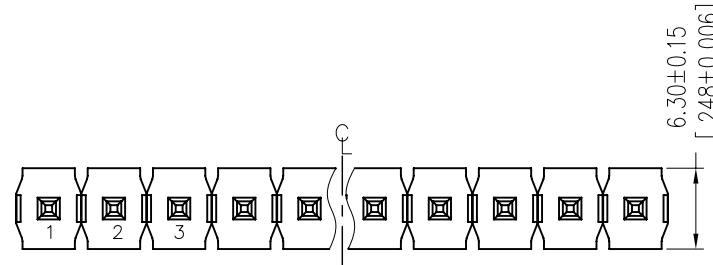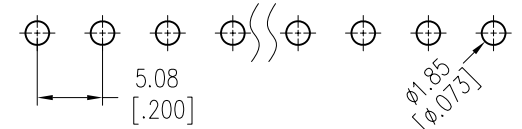

Ordering Information

1925-2 1 XX XX S XXX X X

No. of Pins per Row: 02~20
 Contact Plating: G0=Gold Flash SN=Tin
 Pin length: L=A+B+C
 Packing: 0=PE Bag T=Tube
 Series No.: 1=Type 1 2=Type 2

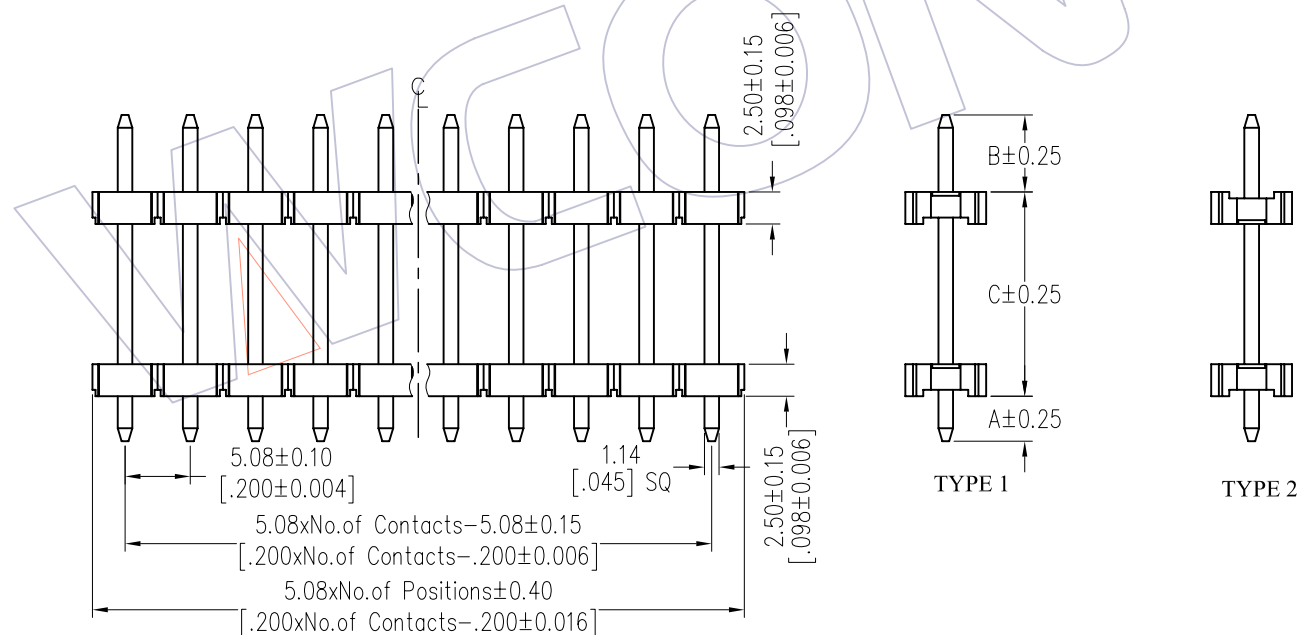

Item	Pin Length	A	B	C	D	Mating
Standard	-----	3.50	8.00	----	----	2989
Alternate						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	JYHuang	2012.07.03	UNIT	mm	1925-21XXXXSXXXX
				x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/07/03	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	PH5.08 SINGLE ROW DOUBLE PLASTIC 180° H=2.5
				Angle ± 3'			PROJ.	☉	Customer NO.
				DIM TOL					