


HSF

NOTES:

Current Rating: 1.0AMP
Contact Resistance: 35mΩ Max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 500MΩ Min
Operation Temperature: -65°C to +125°C




Contact Material:Phosphor Bronze
Contact plating:Au Or Sn over Ni
Insulator Material:PBT+30%G.F UL94V-0

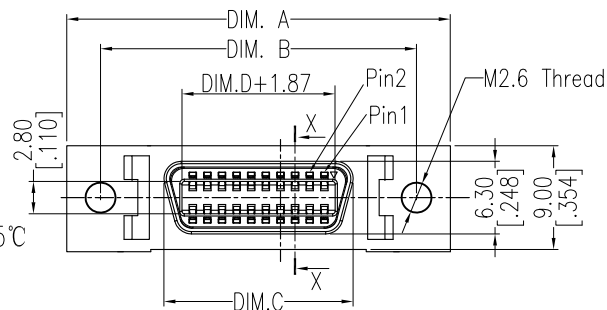



Ordering Information

6321- XXX S D XX M W A 04

No. of Pins	Contact Plating	Packing
14 36	S1=3u"Gold/Tin	A:Tray
20 50	S2=5u"Gold/Tin	
26 68	S3=10u"Gold/Tin	
	S4=15u"Gold/Tin	
	S5=30u"Gold/Tin	

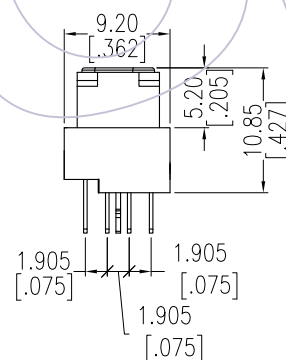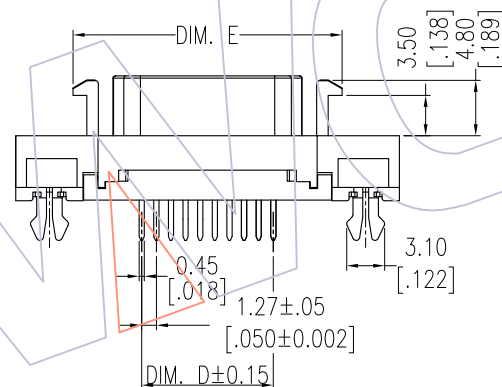

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

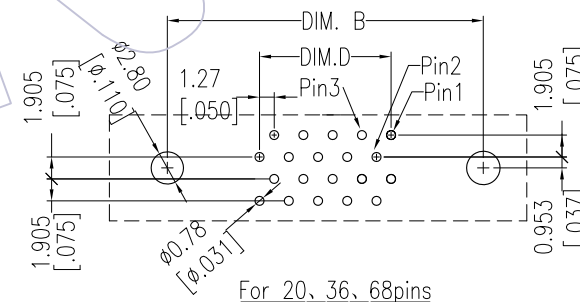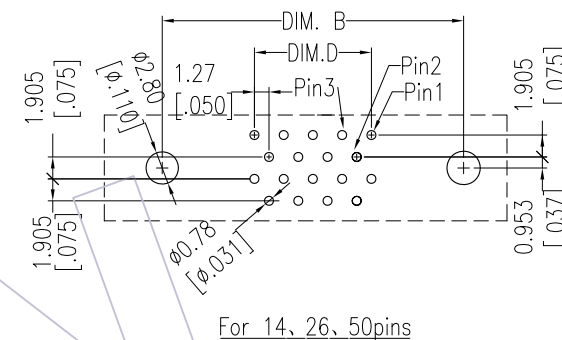

68	63.88	57.93	46.91	41.91	53.65
50	52.45	46.50	35.48	30.48	42.22
36	43.70	37.63	26.59	21.59	33.37
26	37.13	31.28	20.24	15.24	27.18
20	33.32	27.47	16.43	11.43	23.37
14	29.51	23.66	12.62	7.62	19.56
POS.	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E

				OPERATION		DRAW JYHuang	DATE 2015/01/07	SCALE	FIT	PART NO. 6321-0XXSDXXMWA04	
				x.x	±0.40			UNIT	mm		
				x.xx	±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27PITCH CEN 180° TYPE SCSI FEMALE WITH FIXING	
				x.xxx	±0.15			SHEET	1/1		
A0	2015/01/07	NEW	-----	Angle	± 3°	APPROVE	DATE	PROJ.		Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL						