

HSF

NOTES:







Current Rating: 1.0AMP
Contact Resistance: 35mΩ Max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 500MΩ Min
Operation Temperature: -65°C to +125°C

Contact Material:Phosphor Bronze
Contact plating:Au Or Sn over Ni
Insulator Material:PBT+30%G.F UL94V-0

Ordering Information

6321- XXX S D XX M N A 04

No. of Pins	Contact Plating	Packing
14 36	S1=3u"Gold/Tin	A:Tray
20 50	S2=5u"Gold/Tin	
26 68	S3=10u"Gold/Tin	
	S4=15u"Gold/Tin	
	S5=30u"Gold/Tin	

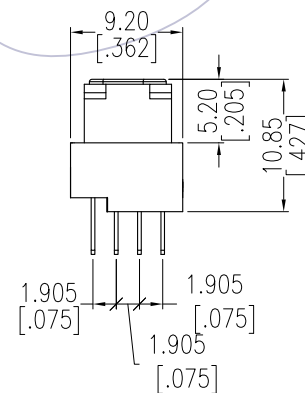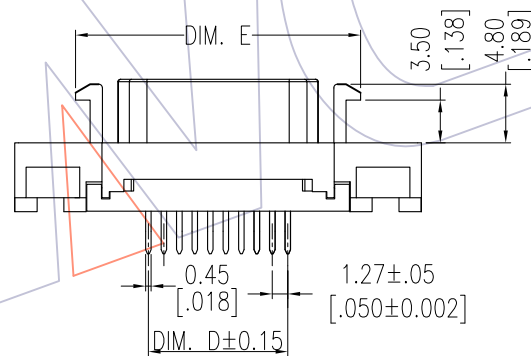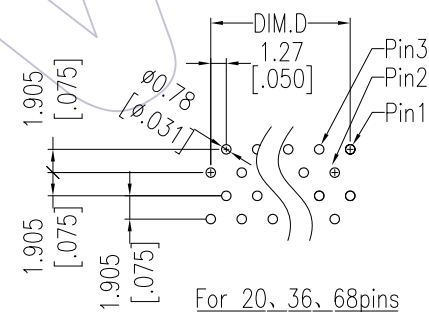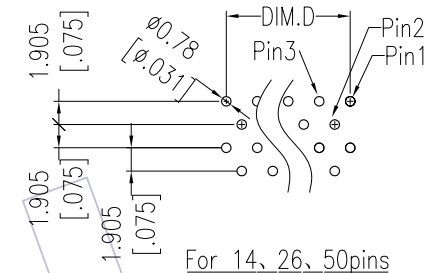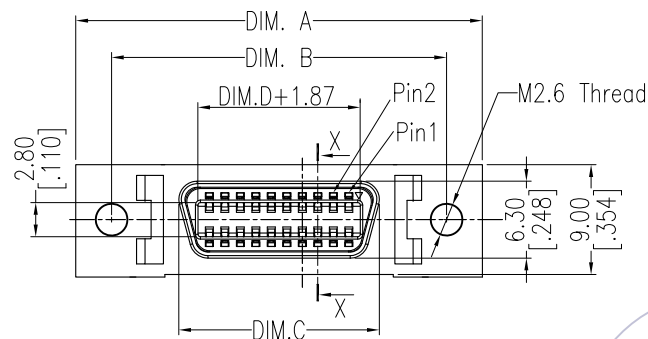

68	63.88	57.93	46.91	41.91	53.65
50	52.45	46.50	35.48	30.48	42.22
36	43.70	37.63	26.59	21.59	33.37
26	37.13	31.28	20.24	15.24	27.18
20	33.32	27.47	16.43	11.43	23.37
14	29.51	23.66	12.62	7.62	19.56
POS.	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E

				OPERATION		DRAW JYHuang	DATE 2015/01/07	SCALE	FIT	PART NO. 6321-0XXSDXXMNA04
				X.X	±0.40			UNIT	mm	
				X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27PITCH CEN 180° TYPE SCSI FEMALE WITHOUT FIXING
				X.XXX	±0.15			SHEET	1/1	
A0	2015/01/07	NEW	-----	Angle	± 3'	APPROVE	DATE			Customer NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.		