

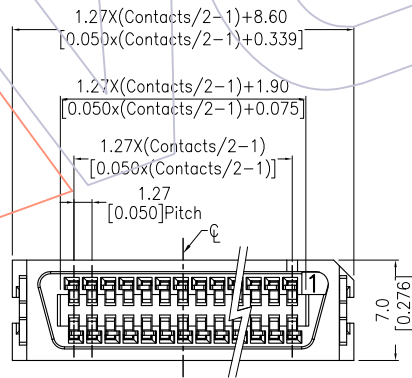


HSF



NOTES:

Current Rating:0.5A/Contact
 Voltage Rating:250V AC
 Contact Resistance:35milliohm Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:500Megohm Min
 Operation Temperature:-20°C to +105°C


Housing Material:PBT+30%G.F UL94V-0 BK
 Cover Material:PBT+30%G.F UL94V-0 BK
 Terminal Material:Phosphor Bronze
 Board Lock Material:Phosphor Bronze
 Terminal plating:Sn-Au over Ni
 Board Lock plating:Sn over Ni

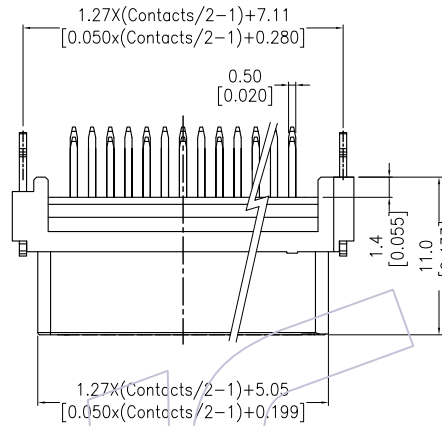

With Board Lock

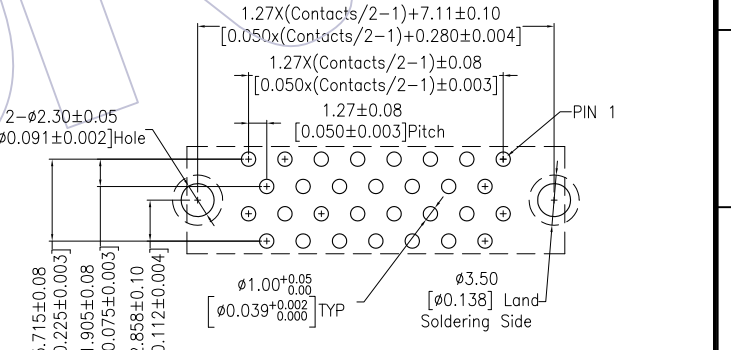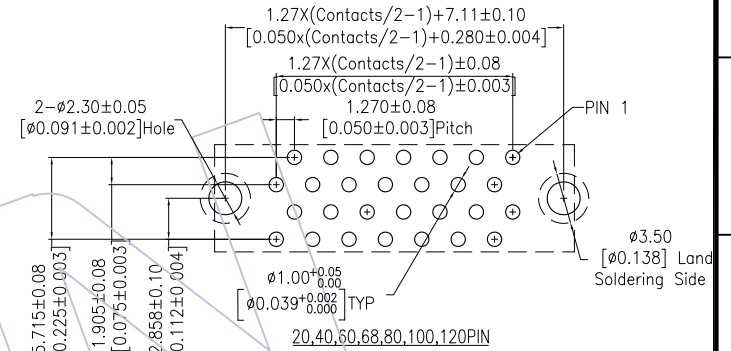

Kinked Contact
 (Each 2 contact at both ends)

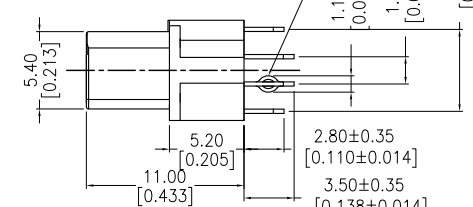

Without Board Lock

Ordering Information

6321D-XXX SD XX P X X 01

No.of Pins Contact Plating Type Packing
 S1=3u"Gold/Tin W:With Board Lock T=Tube
 S2=5u"Gold/Tin N:Without Board Lock

				OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				X.X ±0.40	Ts insn	2013/02/05	UNIT	mm	6321D-XXXSDXXPXX01
				X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	1.27mm SCSI D-Type
AO	2013/02/05	NEW	-----	Angle ± 3'	APPROVE	DATE	PROJ.	Customer NO.	Female 180° DIP
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL					