

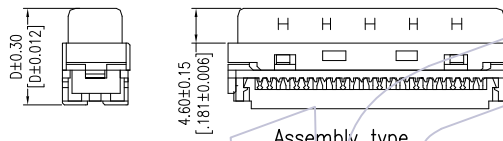



HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 35MΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 500MΩ Min
 Operation Temperature: -55°C to +85°C



Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT UL94V-0
 Front Shell: Steel NICKEL Plated Over Copper

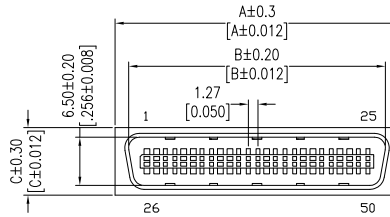


Assembly type
(With Hood)
Male type only

Molded Type
(W/O Hood)
Male type only


(50,68 pos)

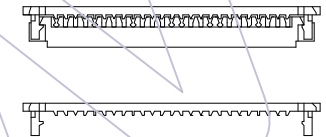

Termination Cover



Termination Plate Cover



Wire Holder





Ordering Information

6320- XXX TI SX MN X 01

No. of Pins
 14 Pin
 20 Pin
 26 Pin
 36 Pin
 50 Pin
 68 Pin
 100 Pin

Contact Plating
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

Packing
 T=Tube
 A=Tray

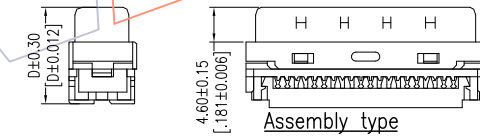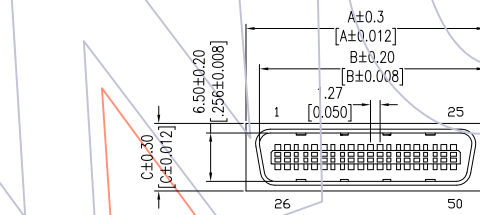

Assembly type
(With Hood)
Male type only

Molded Type
(W/O Hood)
Male type only

(14,20,26,36,100 pos)

Positions	A	B	C	D
14	16.45	12.80	8.60	13.10
20	20.20	16.60	9.50	13.10
26	24.00	20.40	9.50	13.10
36	30.40	26.70	8.60	13.10
50	39.30	35.60	9.50	13.80
68	50.90	46.95	9.30	13.10
100	71.05	67.29	9.30	13.50

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
AO	2014/05/08	NEW	-----	X.X ±0.40	JYHuang	2014/05/08	UNIT	mm	6320-XXXTISXMNX01
				X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	SCSI 1.27mm RIBBON TYPE FOR CABLE
				Angle ± 3'			PROJ.	Customer NO.	CONNECTOR I. D. C TYPE
				DIM TOL					