

HSF

NOTES:

Rated Current: 7.0AMP.

Contact Resistance: 20mΩ Max.

Withstand Voltage: 500V AC/DC

Insulation Resistance: 1000MΩ Min.



Operation Temperature: -40℃ to +105℃

Contact Material: Brass

Contact Plating: Au OR Sn Over Ni

Insulator Material: LCP+30%G.F UL94V-0 BK




Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

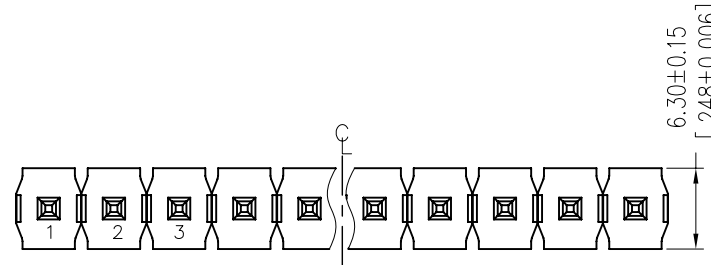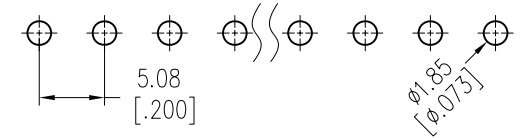

Ordering Information

1925-2 1 XX XX S XXX X X

No. of Pins per Row: 02~20
Contact Plating: G0=Gold Flash SN=Tin
Pin length: L=A+B+C
Packing: 0=PE Bag T=Tube
Series No.: 1=Type 1 2=Type 2

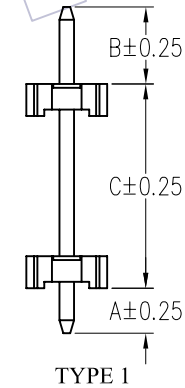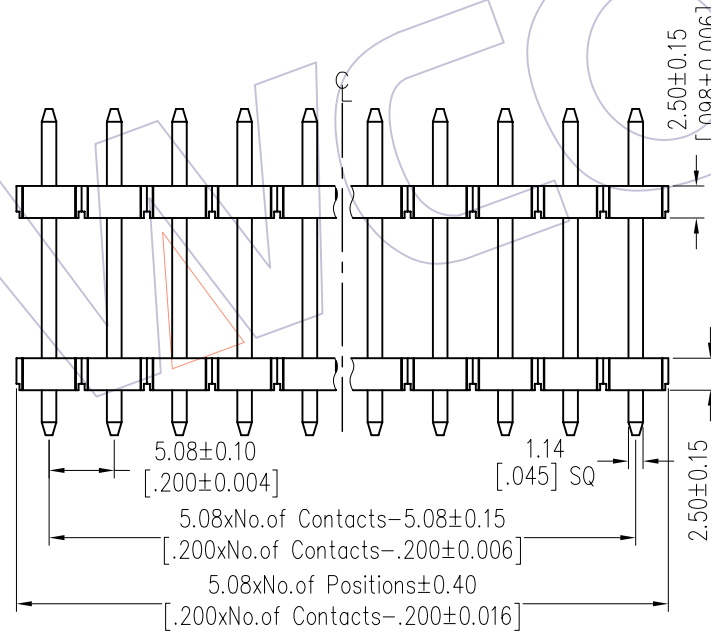

Item	Pin Length	A	B	C	D	Mating
Standard	-----	3.50	8.00	----	----	2989
Alternate						

				OPERATION		DRAW JYHuang	DATE 2012.07.03	SCALE	FIT	PART NO. 1925-21XXXXXXXXX	
				X.X	±0.40			UNIT	mm		
				X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: PH5.08 SINGLE ROW DOUBLE PLASTIC 180° H=2.5	
				X.XXX	±0.15			SHEET	1/1		
A0	2012/07/03	NEW	-----	Angle	± 3°	APPROVE	DATE	PROJ.		Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL						