

HSF

NOTES:

Current Rating:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze
Contact plating:Au over Ni
Insulator Material:PA9T+30%GF UL94V-0

Ordering Information

2334-2 XX M XX CUN X 3


No. of Pins per
Row: 02-50Pin



Contact Plating:
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold



Packing:
T=Tube
P=Tube+CAP
R=Tape&Reel+CAP

Item	Pitch	Mating
Standard	1.27	1310/1315/1320/3131
Alternate		

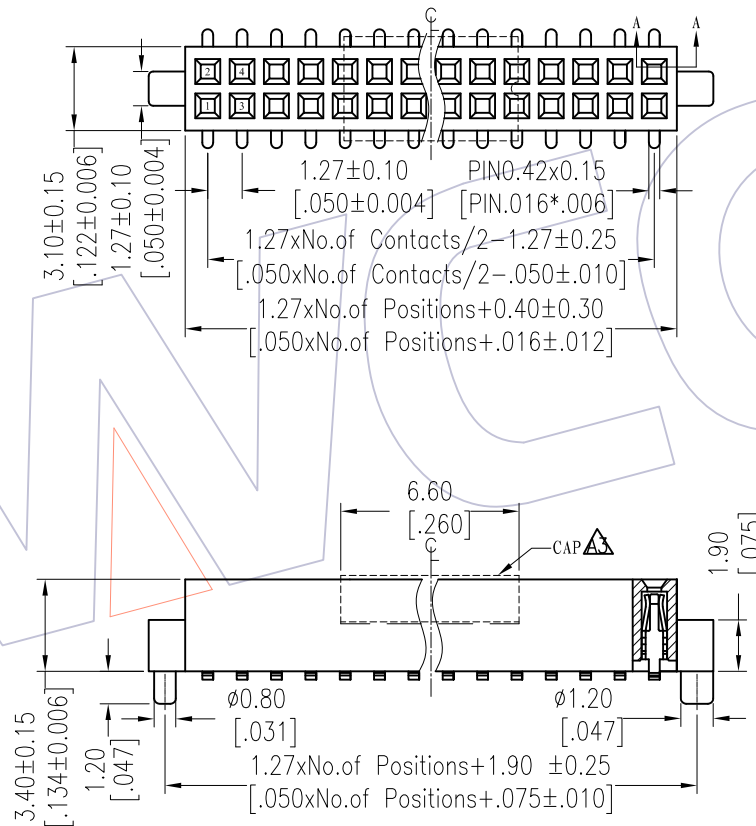

SECTION A-A

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

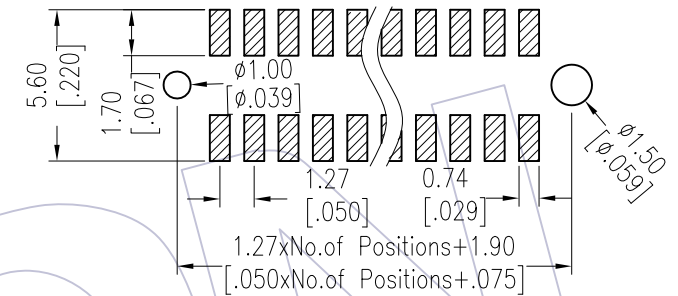

Special CAP for 2*2P, 2*3P, 2*4P

A3	2014/12/30	Modify CAP	-----	OPERATION	DRAW	DATE	SCALE	FIT	PART NO. 2334-2XXMXXCUNX3
A2	2013/08/21	Modify cap2.00→1.80	-----	X.X ±0.40	wang	2014/12/30	UNIT	mm	
A1	2013/07/01	Modify drawing	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: FH1.27mm DUAL ROW 180° SMT WITH DIFFERENT POST AND METAL CAP H=3.40
A0	2012/07/06	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3'	DIM	TOL	PROJ.	Customer NO.	