

# HSF



NOTES:  
 Rated Current:3.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PBT+30%G.F UL94V-0 BK(std)  
 or PA9T+30%G.F UL94V-0 BK



## Ordering Information

1125-22 XX XX R XXX X X


No. of Pins Per Row:02-40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin	Pin Length(Short) L=A+B+C+D+1.2 Standard: .....	Series No. 1=Type 1 2=Type 2 .....
		Packing 0=PE Bag T=Tube	

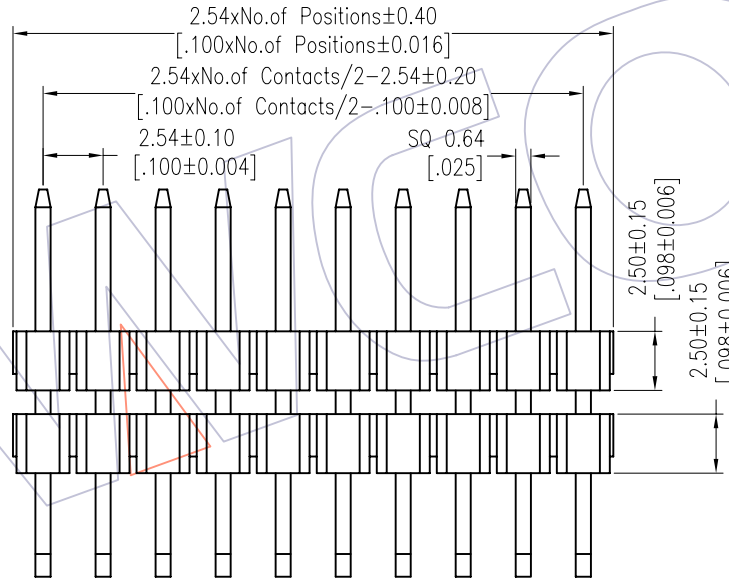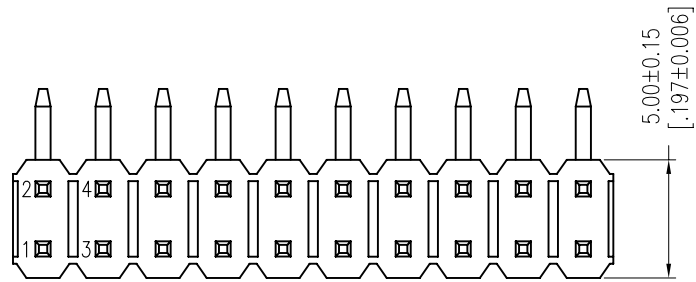

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

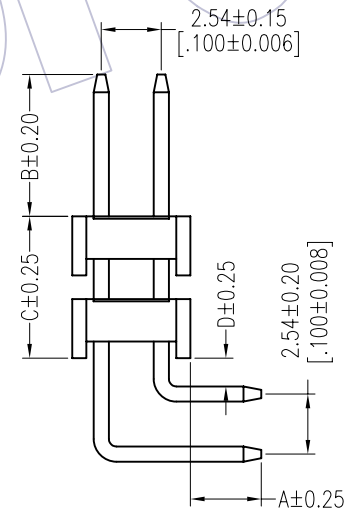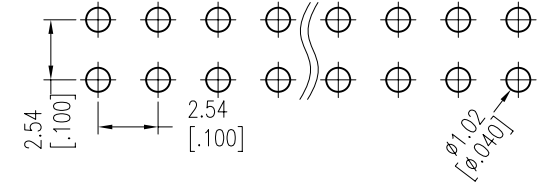

TYPE 1

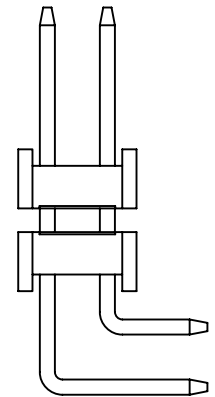

TYPE 2

Item	Pin Length	A	D	B	C	Mating
Standard	---	3.00	1.20	6.00	---	2171 2185
Alternate						

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ±0.40	William Chen	2012.05.28	UNIT mm		1125-22XXXXRXXXXX
X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: PH2.54 DUAL ROW DOUBLE PLASTIC 90° CONCAVE BENDING H=2.5
X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
Angle ± 3'			PROJ.		
DIM TOL					

**WCON**  
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
---	--

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE
A0	2012/05/28	NEW		