

HSF

NOTES:
 Current Rating:1AMP
 Contact Resistance:35mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-55°C to +85°C

Contact Material:Phosphor Bronze
 Contact plating:Au or Sn over Ni
 Shell Material:SPCC,t=0.50mm
 Housing Material:PBT+30%GF(UL94V-0)
 Cover Material:LCP+30%GF(UL94V-0)



Ordering Information

6320 - 068 S S XX M N A 01

No.of Pins
68Pin

Contact Plating
S4=15u"Gold/Tin
S5=30u"Gold/Tin

Packing
A=Tray

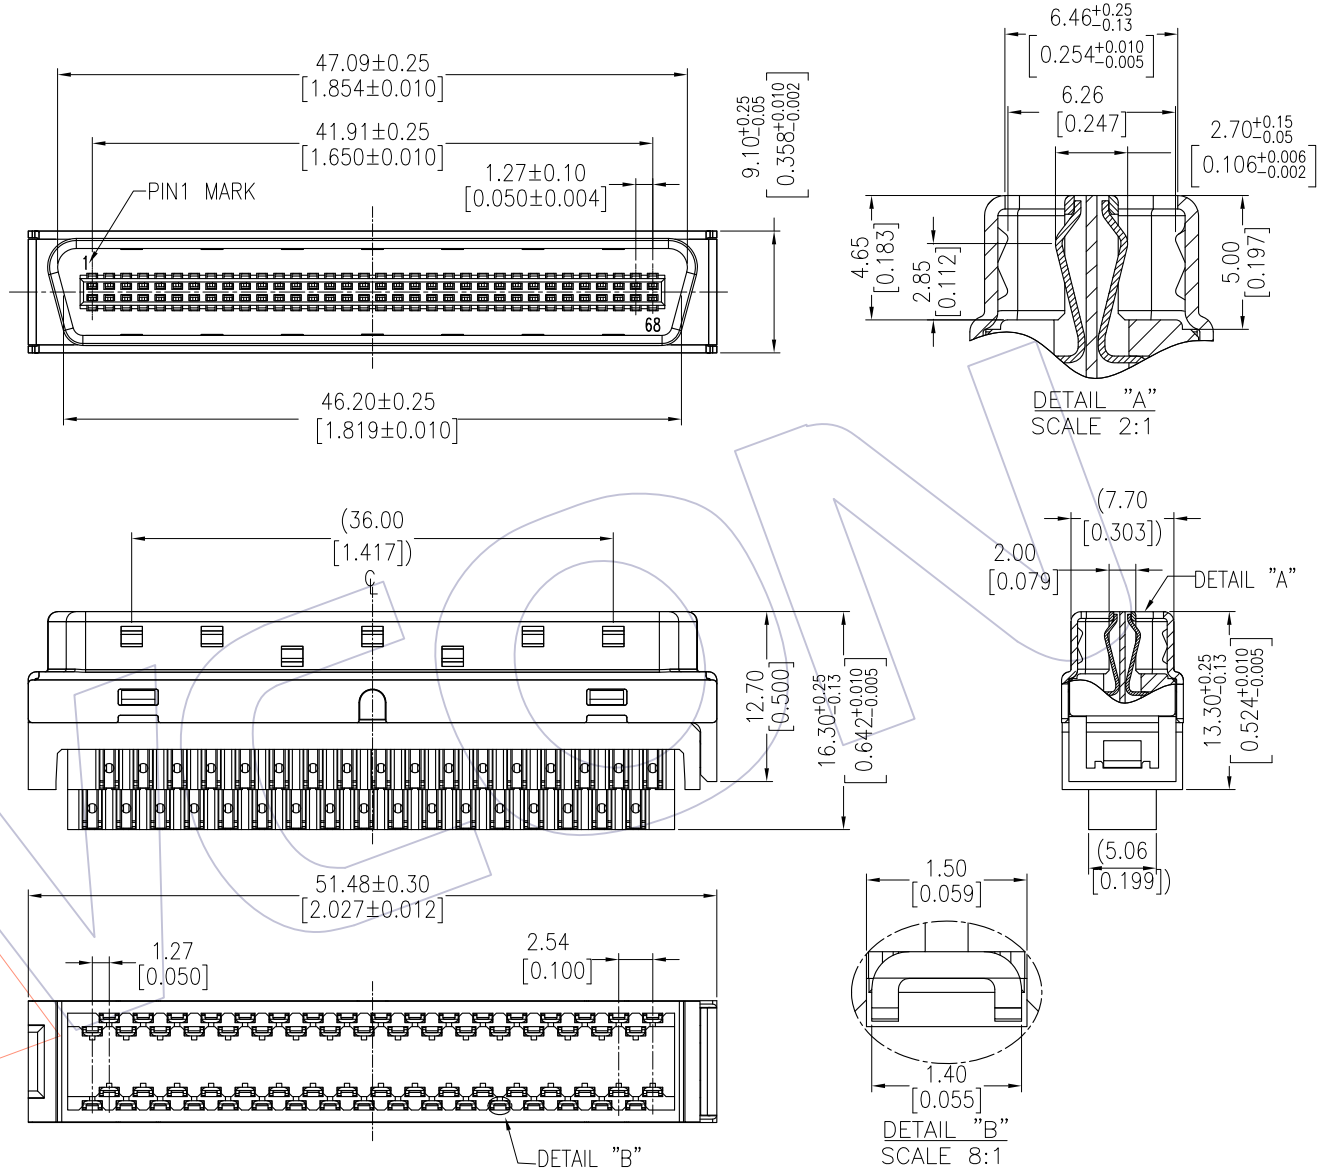

				OPERATION		DRAW	DATE	SCALE	FIT	PART NO. 6320-068SSXXMNA01
				X.X	±0.40	Tsingsn	2012/12/20	UNIT	mm	
				X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27mm SCSI 68P Female (Soldering Type)
A0	2012/12/20	NEW		X.XXX	±0.15	APPROVE	DATE	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3'			PROJ.	⊕	Customer NO.
				DIM	TOL					