

# HSF


NOTES:  
 Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass/Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PBT+30%G.F UL94V-0

## Ordering Information

5310- XX X XX X 02

No. of Pins	Contact Material	Contact Plating	Color Insulator
06 30	B=Brass	S0=Gold Flash/Ni	B=Black
08 34	P=Phosphor Bronze	S3=10u"Gold/Ni	G=Grey(427C)
10 36		S4=15u"Gold/Ni	E=Grey(413C)
14 40		S5=30u"Gold/Ni	
16 50		SN=Tin	
20 60		SM=Matte Tin	
24 64			
26			

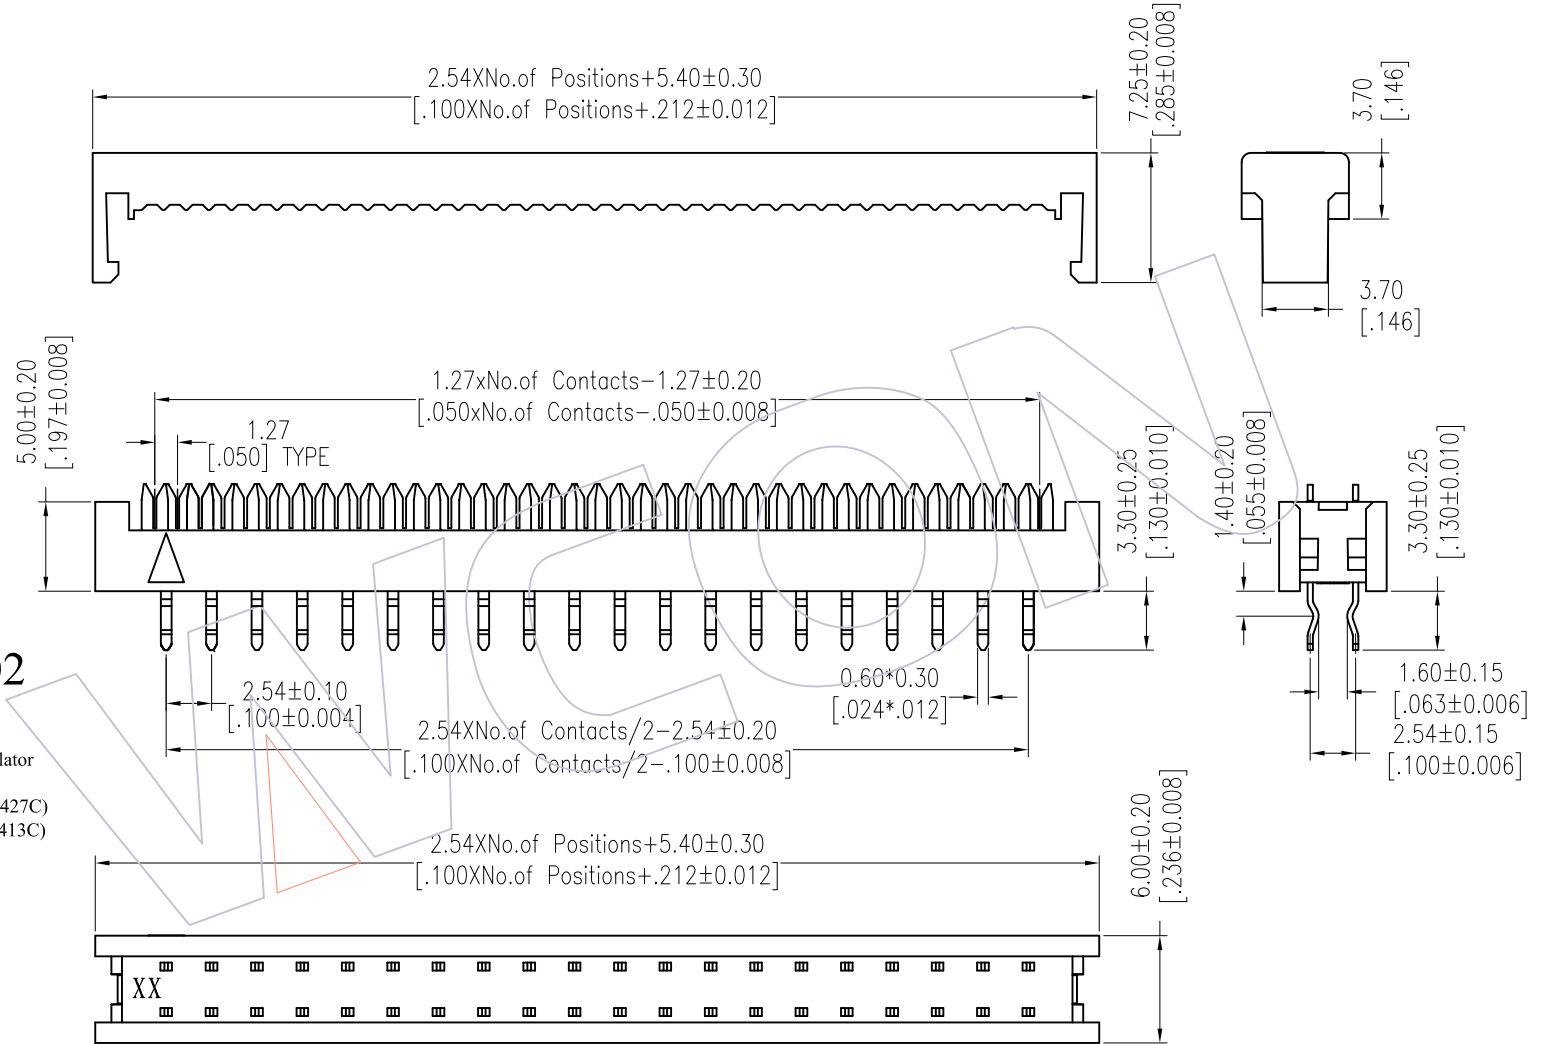

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
x.x ±0.40	JYHuang	2014/05/26	UNIT	mm	5310-XXXXXX02
x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	2.54 DIP PLUG CONNECTOR KINK-PIN
Angle ± 3'			PROJ.		Customer NO.
DIM TOL					

AO	2014/05/26	NEW	-----
REV	DATE	MODIFICATION DESCRIPTION	CHANGE