

HSF

NOTES:

Rated Current:3.0 AMP @120V.
Contact Resistance:30mΩ Max.
Withstand Voltage:600V MAX.
Insulation Resistance:1000MΩ Min.
Operation Temperature:-40℃ to +105℃
-Solid Wire: 18 AWG
-Tin Bonded: 18 AWG(≤16 Strand)






Contact Material:Phosphor Bronze(C5191)
Contact Plating: Sn over Ni
Main Body Material: PA66 UL94V-0

Ordering Information

L560 - HK - XX - C - 01

No. of Pins
02: 2 pin
03: 3 pin

Color
C= Orange

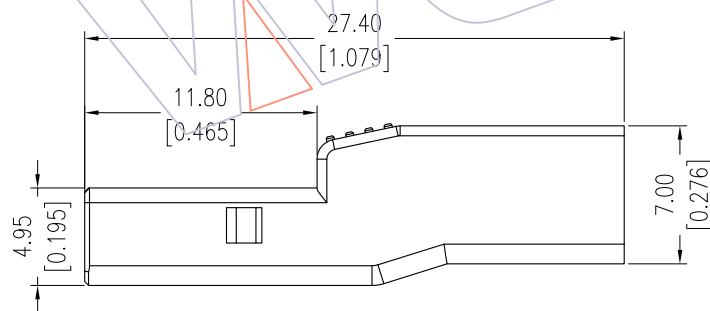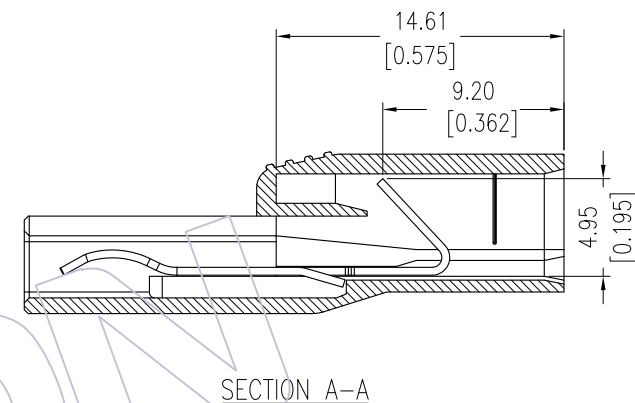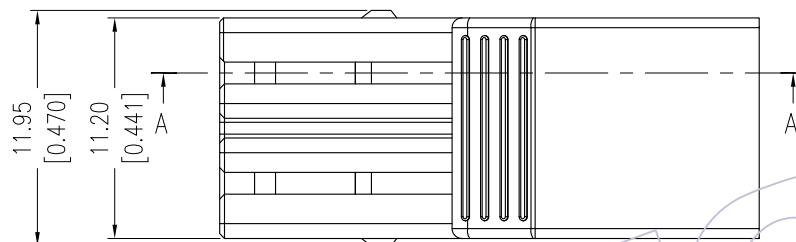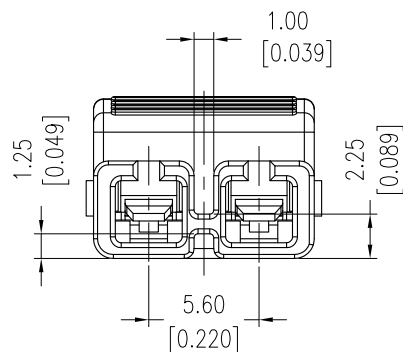

				OPERATION		DRAW Allen	DATE 2015/06/15	SCALE	Fit	PART NO. L560-HKXXC01	
				X.X	±0.40			UNIT	mm		
				X.XX	±0.25	CHECK	DATE	SIZE A4	TITLE: LED CONN.MALE L=27.40		
				X.XXX	±0.15						
A0	2015/06/15	NEW	_____	Angle	± 3°	APPROVE	DATE	SHEET	1/1	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.			