


HSF

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55°C to +105°C

Contact Material: Phosphor Bronze/Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0
 Sheel: Cold Roller Steel, Ni Plated
 Nut: Brass, Sn over Ni Plated

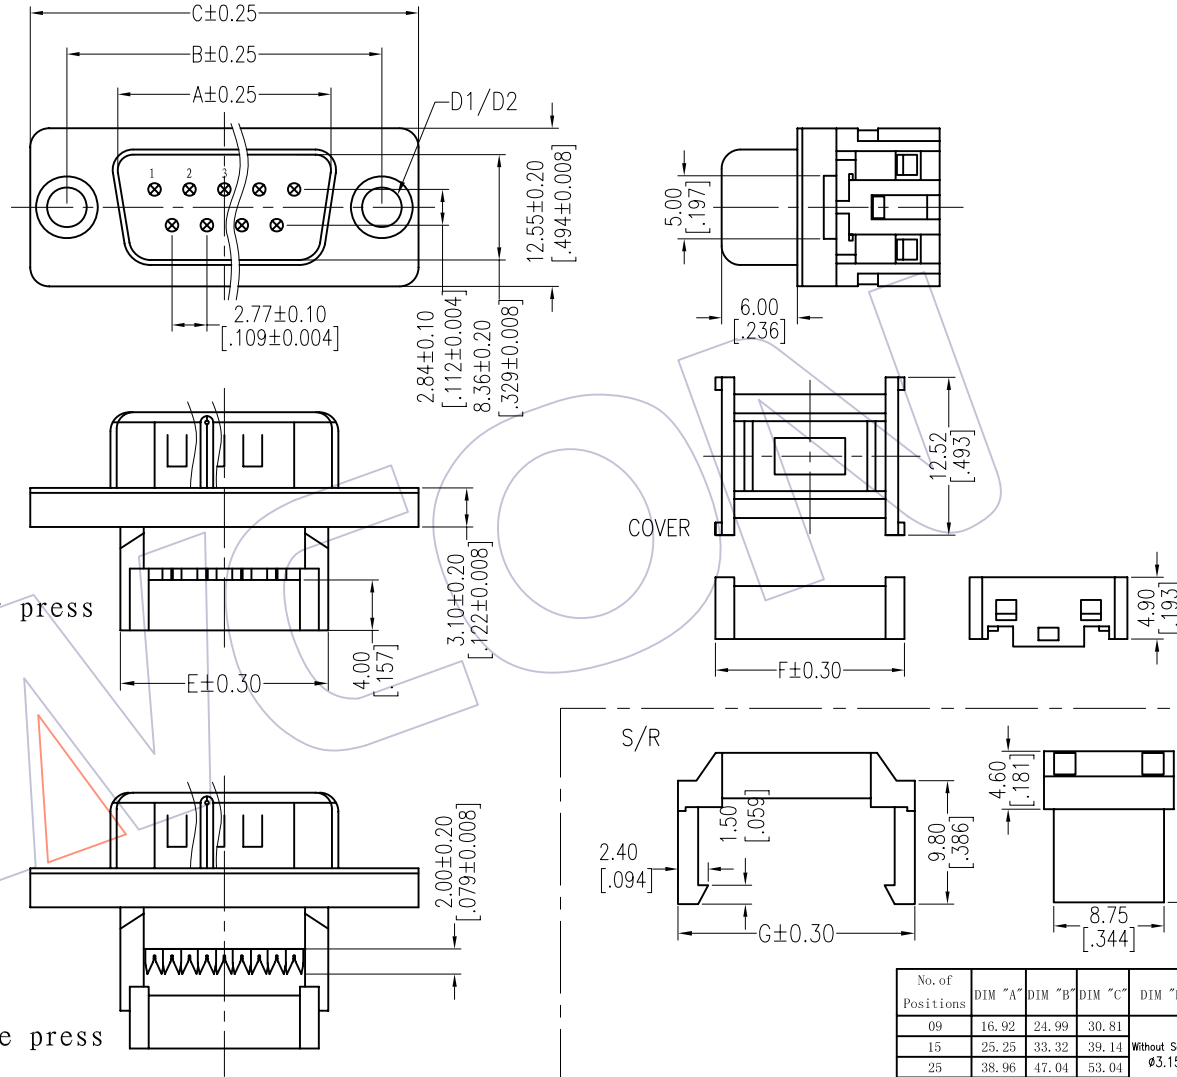

Ordering Information

6224-XX M N XX X 0 X

No. of Pins 09,15,25,37P	Contact Plating S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin	Insulator Color B:Black U:Blue	Screw 1=Without Screw (three part) 2=With Screw (three part) 3=Without Screw (two part) 4=With Screw (two part)
-----------------------------	---	--------------------------------------	---

S/R

No. of Positions	DIM "A"	DIM "B"	DIM "C"	DIM "D1"	DIM "D2"	DIM "E"	DIM "F"	DIM "G"	D1		D2	
									6224-XXMXXX01/3	6224-XXMXXX02/4	Without Screw Ø3.15	With Screw #4-40
09	16.92	24.99	30.81			16.50	15.00	18.80				
15	25.25	33.32	39.14			24.80	23.30	26.90				
25	38.96	47.04	53.04			38.60	37.00	40.50				
37	55.42	63.50	69.92			55.20	53.70	57.20				

OPERATION	DRAW	DATE	SCALE	FIT	PART NO. SEE TABLE
X.X ±0.40	JYHuang	2012/12/06	UNIT	mm	
X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: D-SUB MALE DUAL ROW IDC TYPE
X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	
Angle ± 3'			PROJ.	Customer NO.	
DIM TOL					

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE
AO	2012/12/06	NEW		