



HSF

NOTES:

Current Rating: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40℃ to +105℃

Contact Material: Brass
Contact plating: Au Or Sn over Ni
Insulator Material: PA9T+30%G.F UL94V-0
Above 20 Poles With "E" Profile.



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

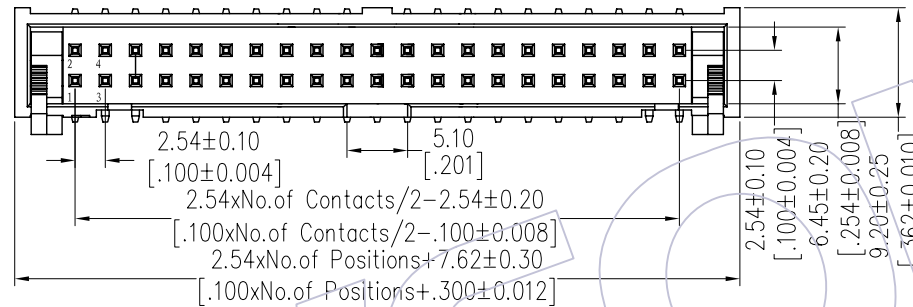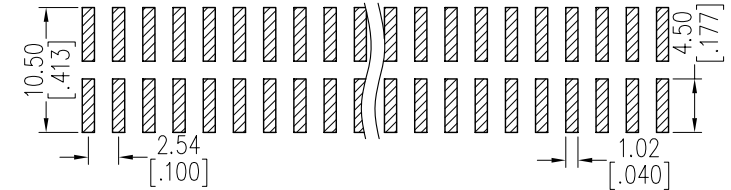

Ordering Information

3211 - XX M XX B X X 1

No. of Pins	Contact Plating	Insulator Color	Latch Type	Packing
06 26	G0=Gold Flash	B=Black	L=Long Latch	T=Tube
08 30	G3=10u"Gold	U=Blue	S=Short Latch	
10 34	G4=15u"Gold	G=Grey(427C)		
14 40	G5=30u"Gold	E=Grey(413C)		
16 50	S0=Gold Flash/Tin			
20 60	S3=10u"Gold/Tin			
64	S4=15u"Gold/Tin			
	S5=30u"Gold/Tin			
	SN=Tin			

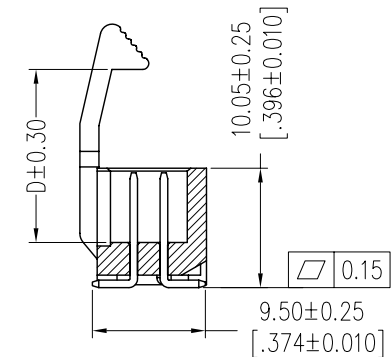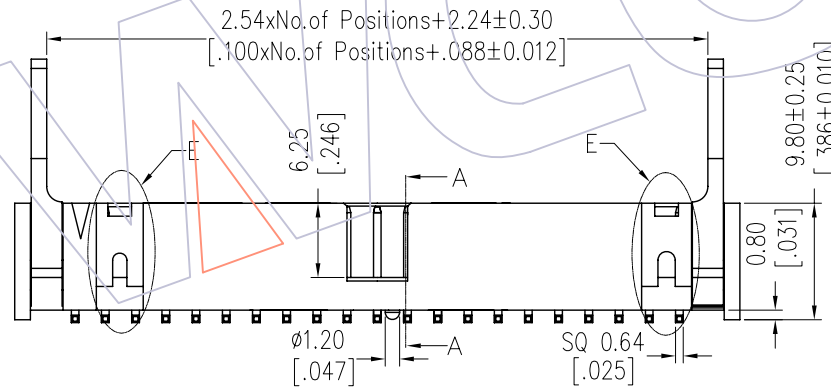

Item	Pitch	Mating
Standard	2.54	5212/5211
Alternate		

Dimension antitheses list	
PART NO	D
3211-XXMXXBLX1	14.55
3211-XXMXXBSX1	10.65

				OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
				X.X		JYHuang		2012/10/08		UNIT		mm		SEE TAB	
				X.XX		CHECK		DATE		SIZE		A4		TITLE:	
				X.XXX		APPROVE		DATE		SHEET		1/1		2.54 EJECTOR HEADER SMT METAL LATCH	
				Angle						PROJ.		Customer NO.			
				DIM		TOL									

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/10/08	NEW	-----