
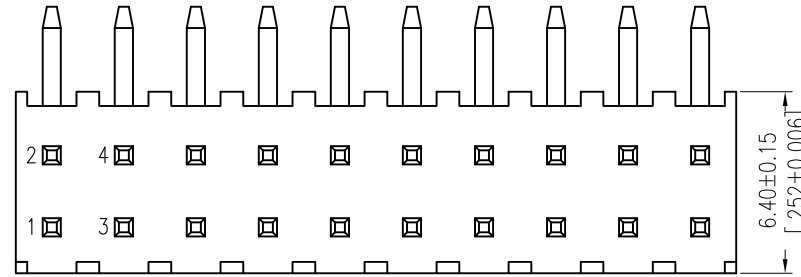
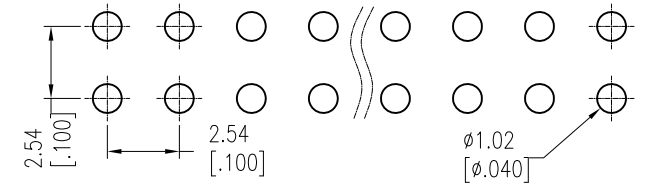


HSF

NOTES:
 Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 

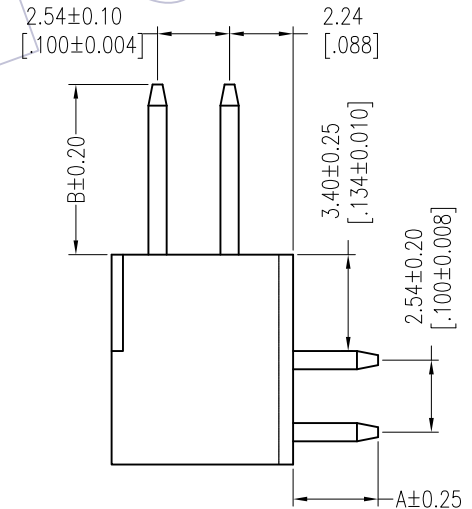
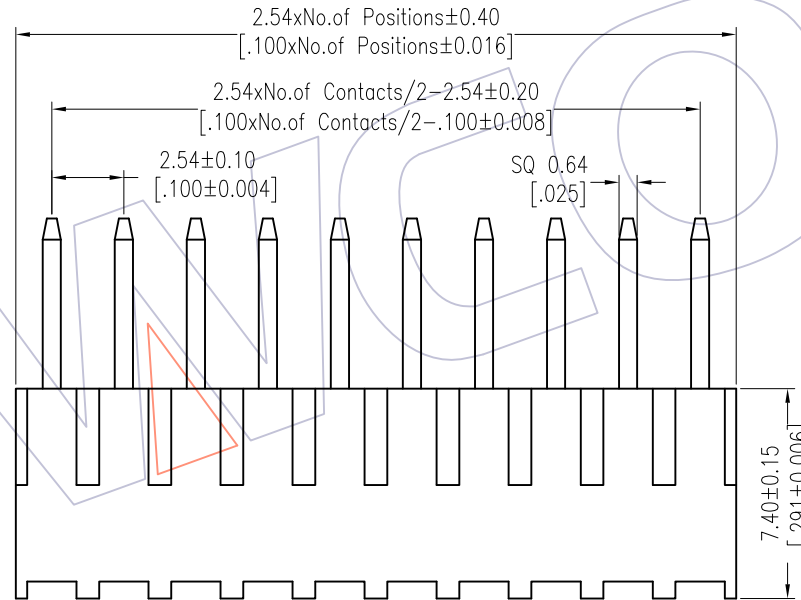
Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)






Ordering Information

1174-12 XX XX R XXX X X

No.of Pins	Contact Plating	Pin Length(Short)	Packing
Per Row:02-40	G0=Gold Flash	L=A+B+5.6	0=PE Bag
	G3=10u"Gold	Standard:146=14.6	T=Tube
	G4=15u"Gold		
	G5=30u"Gold		
	S0=Gold Flash/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		



Item	Pin Length	A	B
Standard	14.60	3.00	6.00
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2013/03/01	Modify The Material		x.X ±0.40	Tsingsn	2013/03/01	UNIT	mm	1174-12XXXXRXXXXX
A1	2012/12/13	Add PBT Material		x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: PH2.54 DUAL ROW 90° H=7.4
A0	2012/05/08	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					