HSF

NOTES:
Rated Current:1.75AMP
Contact Resistance:20mΩ max
Withstand Voltage:500V AC/DC
Insulation Resistance:5000MΩ min A2
Operation Temperature:−55℃ to +125℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:LCP+30%G.F UL94V−0

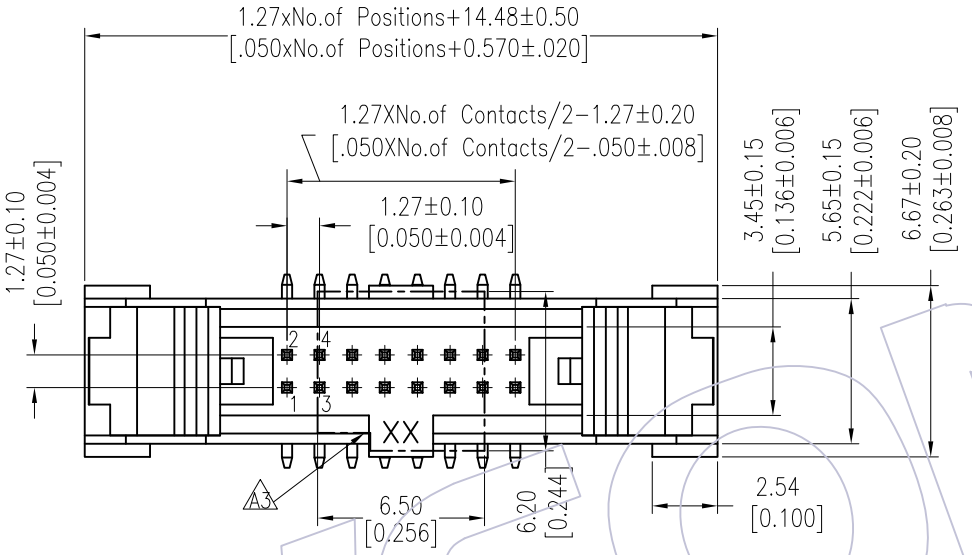

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

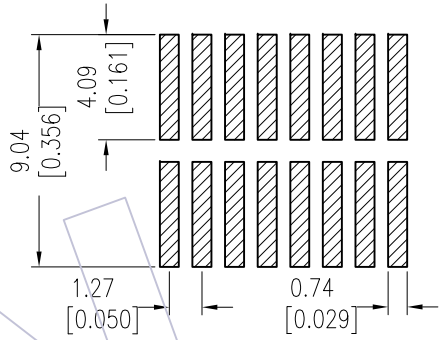

Ordering Information

3231- XX M XX B S T 1

No.of Pins	Contact Plating	Insulator Color	Packing
06 26	G0=Gold Flash	B=Black	T=Tube
08 30	G3=10u"Gold		P=Tube+CAP
10 34	G4=15u"Gold		R=Tape&Reel+CAP
14 40	G5=30u"Gold		
16 44	S0=Gold Flash/Tin		
20 50	S3=10u"Gold/Tin		
24	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		
	SN=Tin		

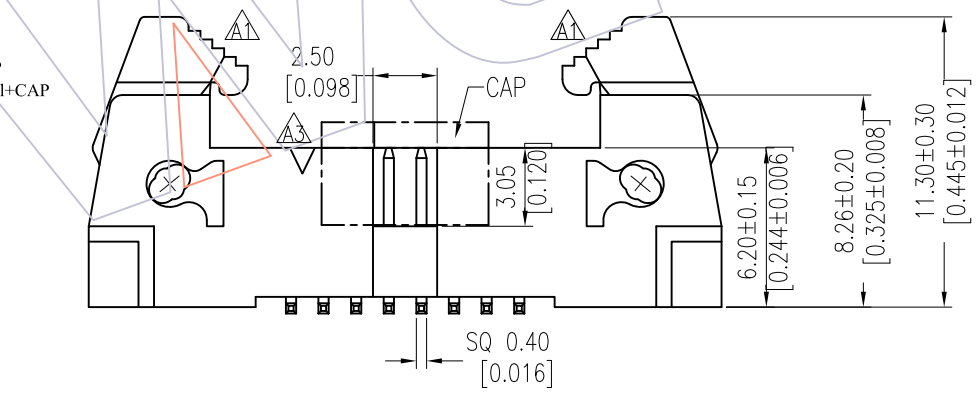

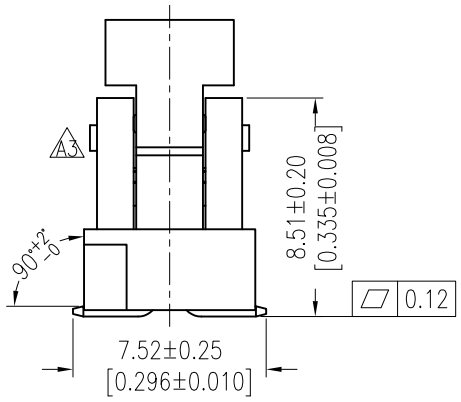

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A3	2012/08/31	Modify CAP	
A2	2010/08/09	Modify drawing	——
A1	2010/06/24	Modify drawing	——
A0	2009/11/21	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Tsingsn	DATE	2012/08/31
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm / inch
SIZE	A4
SHEET	1/1
PROJ	

PART NO. 3231-XXMXXBST1

TITLE: 1.27 Ejector Header "S" Type SMT W/O fork

Customer NO.

Wicon