



HSF

NOTES:

Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

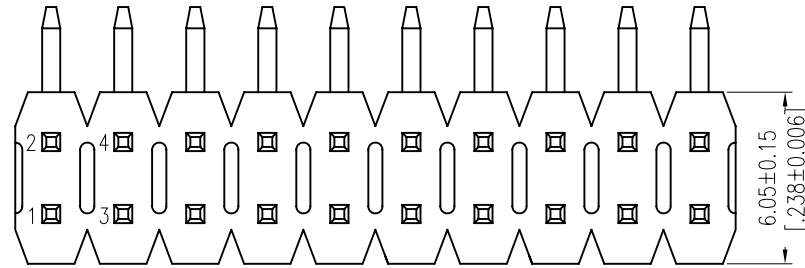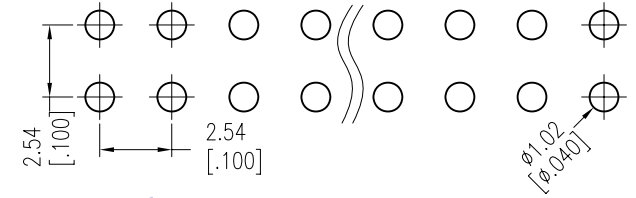

Ordering Information

1123-12 XX XX R XXX X 1

No. of Pins	Contact Plating	Pin Length(Short)	Packing
Per Row:02~40	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold	L=A+B+D+4.0 Standard:142=14.2 T=Tube	0=PE Bag
	S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin		

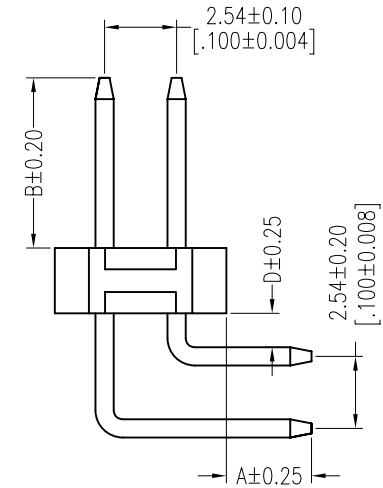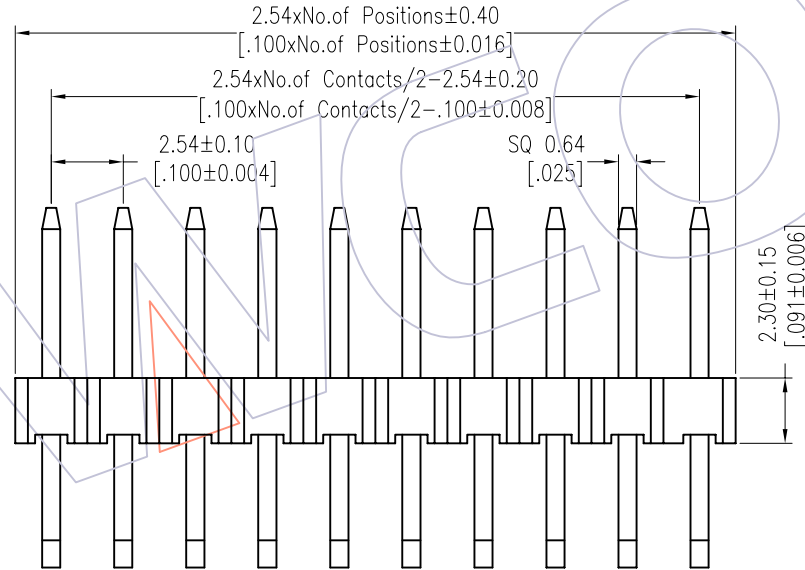

Item	Pin Length	A	D	B
Standard	14.20	3.00	1.20	6.00
Alternate				

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
					X.X ±0.40	William Chen	2012.05.08	UNIT	mm	1123-12XXXXRXXXXX
					X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
					X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.54 DUAL ROW 90° H=2.3 CONCAVE BENDING
					Angle ± 3'			PROJ.	Customer NO.	
					DIM TOL					



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--