

HSF

NOTES:

Current Rating: 2.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
Contact plating: Au over Ni
Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

2220 - 1 XX M XX CUNT X


No. of Pins per
ROW: 02-40PIN

Contact Plating:
G0=Gold Flash
G3=10μ"Gold
G4=15μ"Gold
G5=30μ"Gold



Packing:
T=Tube

Series No.
1=TYPE1
2=TYPE2


Item	Pitch	Mating
Standard	2.00	1220
Alternate		

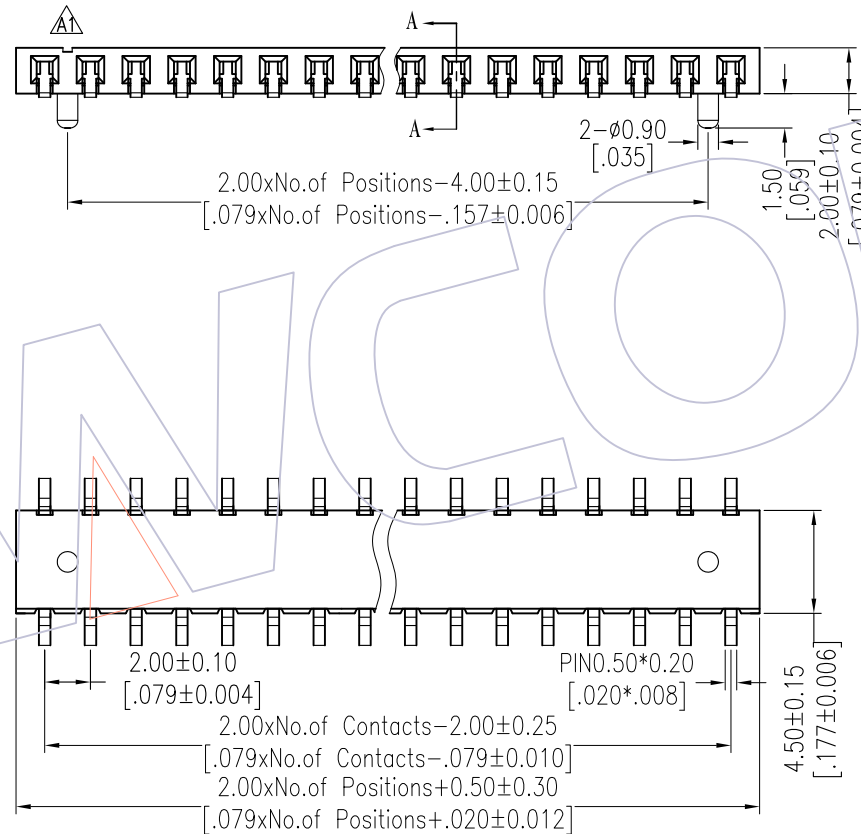

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

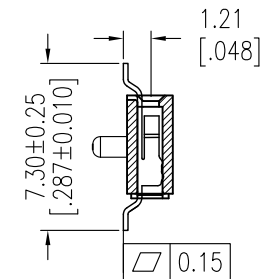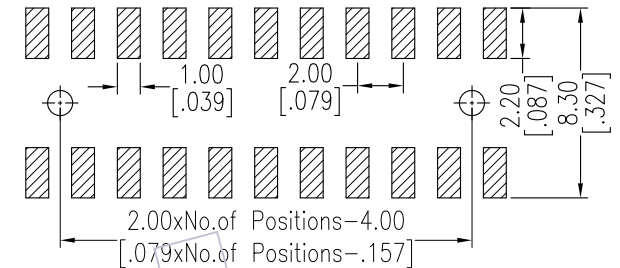

TYPE 2: WITH POST
SECTION A-A

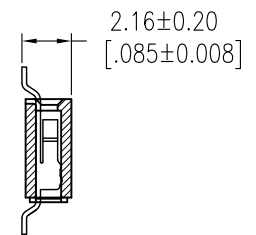

TYPE 1: W/O POST

TITLE	PART NO.
TYPE 1	2220-1XXMXXCUNT1
TYPE 2	2220-1XXMXXCUNT2

			OPERATION		DRAW Wang	DATE 2013/03/26	SCALE UNIT	FIT mm	PART NO. 2220-1XXMXXCUNT X
A1	2013/03/26	Modify Drawing	X.X	±0.40					
A0	2012/12/06	NEW	X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: FH2.00mm SINGLE ROW 180° SMT SIDE ENTER H=2.0
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle DIM	± 3° TOL	APPROVE	DATE	SHEET 1/1	Customer NO.