

HSF

NOTES:

Rated Current:3.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-40℃ to +105℃

Contact Material: Phosphor Bronze or Brass 
Contact Plating: Au Or Sn Over Ni
Insulator Material: PA9T+30%G.F UL94V-0(Std)
Or PBT+30%G.F. UL94V-0

Ordering Information

2185DA X - 2 XX S XX X YN X X

Add number
1~4pcs


△ No. of Pins per
ROW: 02~27PIN

Contact Plating: I
G0=Gold Flash A
G3=10μ"Gold C
G4=15μ"Gold
G5=30μ"Gold
S0=Gold Flash/Tin
S3=10μ"Gold/Tin
S4=15μ"Gold/Tin
S5=30μ"Gold/Tin
SN=Tin

Insulator :
A=PBT

Packing:
A=Tray
T=Tube

Item	Pitch	Mating
Standard	2.54	1125
Alternate		

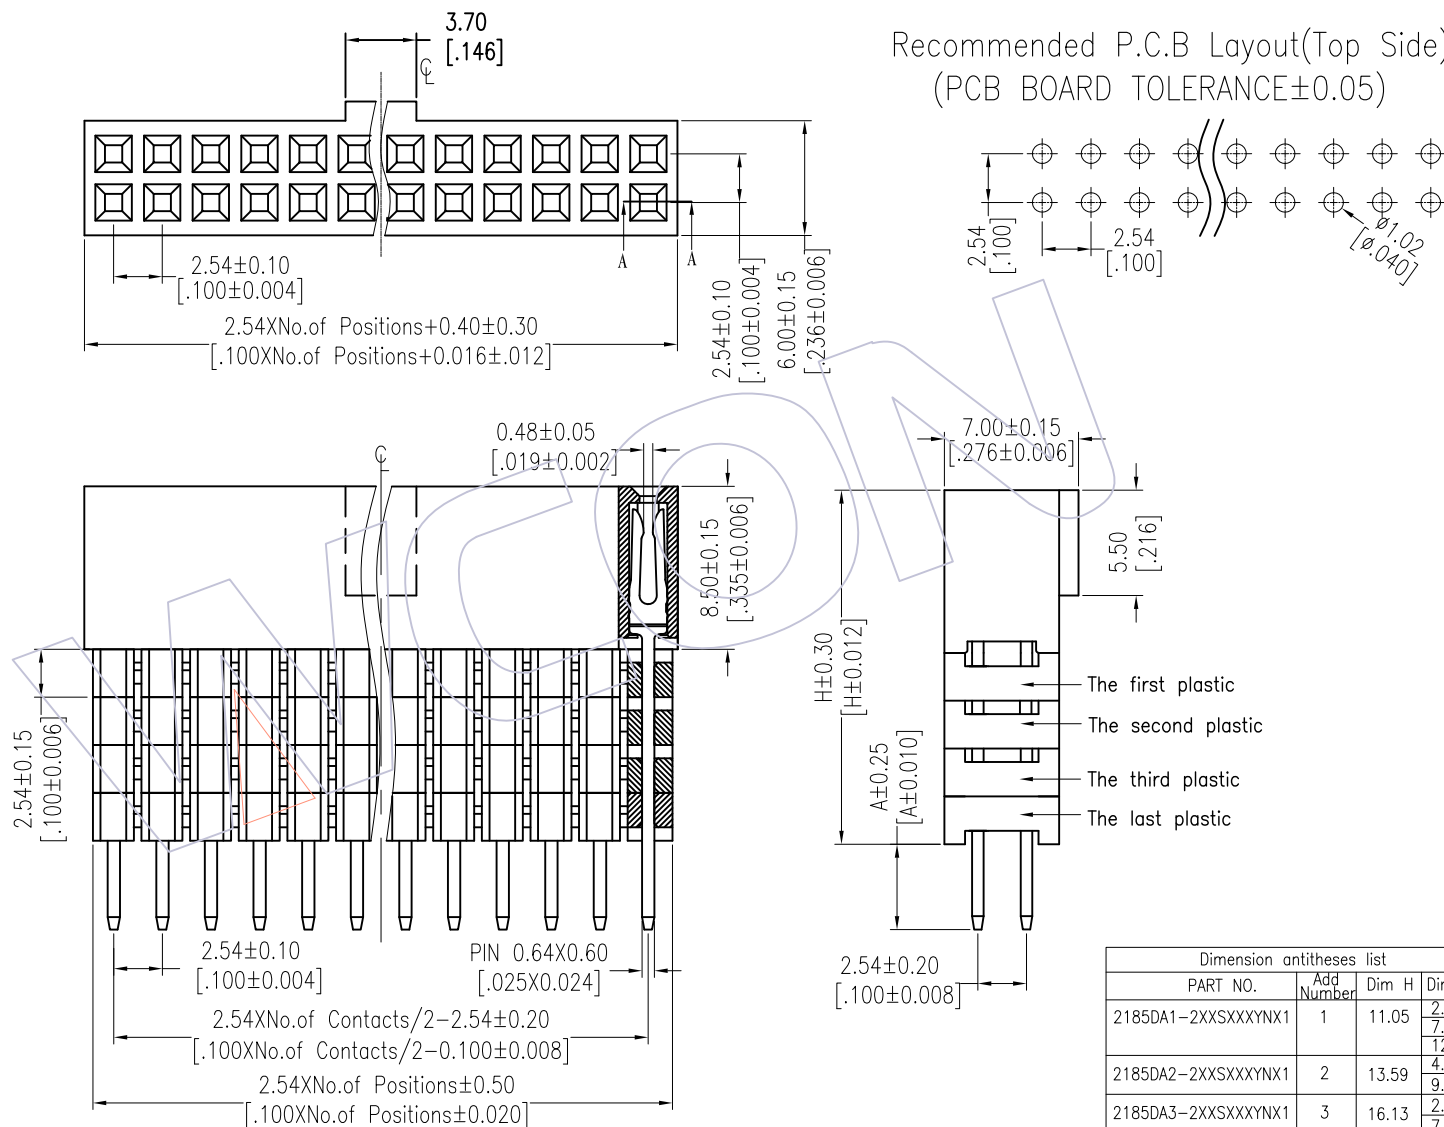

SECTION A-A

				OPERATION		DRAW	DATE	SCALE	FIT	PART NO. SEE TABLE
A2	2015/08/27	Modify		X.X	±0.40		Allen	2015/08/27	UNIT	
A1	2014/10/08	Modify drawing		X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE: FH2.54 DUAL 180°ADD HOUSING H=8.5 WITH HALF BUMP W=6.0
A0	2012/08/24	NEW		X.XXX	±0.15			SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3'	APPROVE	DATE	SHEET	1/1	Customer NO.
				DIM	TOL			PROJ.		