

HSF

NOTES:






Current Rating: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -55℃ to +105℃

Contact Material: Brass
Contact plating: Au Or Sn over Ni
Insulator Material: PBT+30%G.F UL94V-0
Shell: Cold Roller Steel, Ni Plated
Nut: Brass, Sn Over Ni Plated

Ordering Information

6222A-XX F X XX B 01

No. of Pins	Type	Contact Plating	Insulator Color
09, 15, 25, 37P	Y=With Back Fork	S0=Gold Flash/Tin	B:Black
	B=With Back Nut	S3=10u"Gold/Tin	U:Blue
	F=With Front Nut	S4=15u"Gold/Tin	
	N=Without Fork	S5=30u"Gold/Tin	
	Without Nut	SN=Tin	
	H=With Back Fork		
	With Screw		

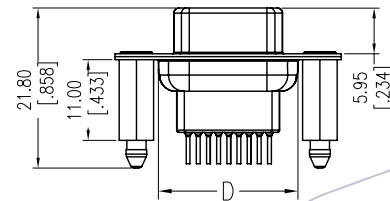
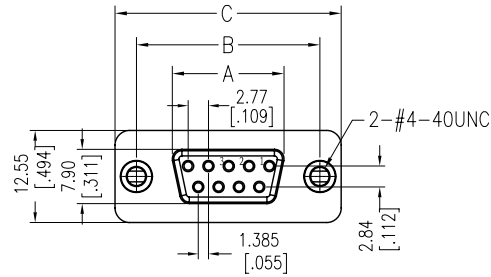


6222A-XXFYXXB01

6222A-XXFBXXB01


6222A-XXFFXXB01

6222A-XXFNXXB01



6222A-XXFHXXB01

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



6222A-XXFYXXB01
6222A-XXFHXXB01

6222A-XXFBXXB01
6222A-XXFFXXB01
6222A-XXFNXXB01

No. of Positions	DIM "A"	DIM "B"	DIM "C"	DIM "D"
09	16.33	24.99	30.81	19.28
15	24.66	33.32	39.14	27.65
25	38.38	47.04	53.04	41.30
37	54.84	63.50	69.32	57.44

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X ±0.40	JYHuang	2012/12/04	UNIT	mm	6222A-XXFXXB01
				X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	D-SUB FEMALE DUAL ROW 180° DIP
				Angle ± 3'			PROJ.	1/1	Customer NO.
				DIM TOL					