


Alle Rechte vorbehalten/ All rights reserved


X Kontaktanordnung/ *contact arrangement*

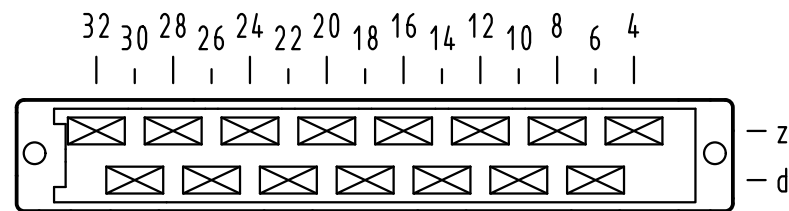

15 Kontakte
15 contacts

 = Kontaktposition belegt
= *position with contact*

 = Kontaktposition nicht belegt
= *position without contact*

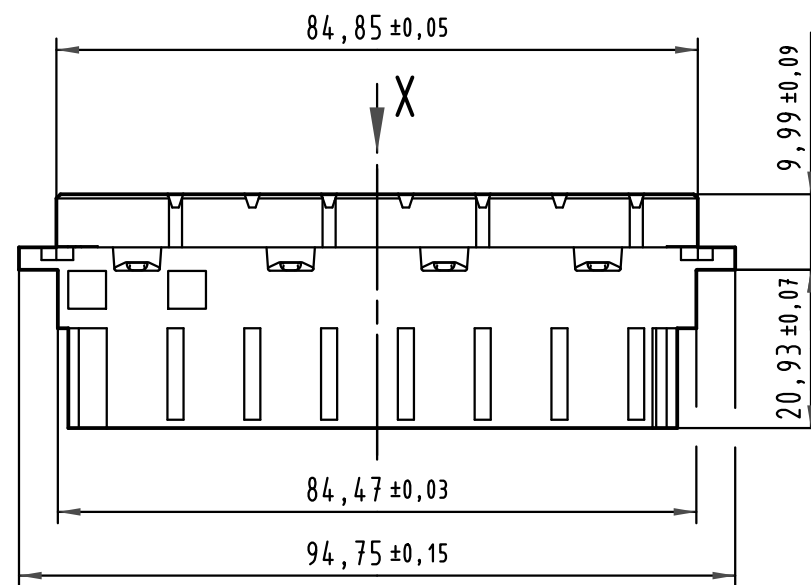

Technical drawing of a 4-position, 6x7 pin connector. The drawing shows a side view of the connector with dimensions in millimeters.

Dimensions:

- Overall length: $90 \pm 0,1$
- Pin pitch (horizontal): $10,16$ mm
- Pin pitch (vertical): $10,16$ mm
- Number of rows: $6 \times 10,16 (= 60,96)$
- Number of columns: $7 \times 10,16 (= 71,12)$
- Overall width: $6,5$ mm
- Pin diameter: $\varnothing 2,87 \pm 0,03$
- Pin spacing: $1,27$ mm
- Position label: 4 — Position
- Row label: 32 — *Reihe* row

Kontaktfläche Ag
contact surface Ag

 All Dimensions in mm Original Size DIN A 3			Techn. Character. IEC 60603-2			Nicht tolerierte Maß/Free size tolerances IEC 60603-2			
				Dat.	Name	Maßstab/Scale 1 : 1 2 : 1	Bauform/type H 15 Federleiste Faston quer female connector faston across		
			Detail.	25.11.04	Leh.				
35258	02.09.08	LehT	Insp.	25.11.04	kfoe				
33602	08.05.06	Leh.	Stand.						
32646	10.05.05	Leh.	HARTING Electronics GmbH & Co. KG				TB 09 06 215 2811		Blatt/ page /
32416			D-32339 ESPELKAMP						
Mod.	Dat.	Name							
						Sub.MB 09 06 215 2811 Mod.11444 v.22.03.91			

