




1	2	3	4	5	6	7	8		
A								A	
B								B	
C	performance level			insulator colour	dimensions			C	
	PL3	PL2	S4		A max.	B	E		
	no. of contacts	part number	part number		part number				
	06	09 18 506 7322	09 18 506 6322		09 18 506 5322	15,4	12,78		2,54 x 2 = 5,08
	10	09 18 510 7322	09 18 510 6322		09 18 510 5322	20,5	17,86		2,54 x 4 = 10,16
	14	09 18 514 7322	09 18 514 6322		09 18 514 5322	25,6	22,94		2,54 x 6 = 15,24
	16	09 18 516 7322	09 18 516 6322		09 18 516 5322	28,1	25,48		2,54 x 7 = 17,78
	20	09 18 520 7322	09 18 520 6322		09 18 520 5322	33,2	30,56		2,54 x 9 = 22,86
	26	09 18 526 7322	09 18 526 6322		09 18 526 5322	40,8	38,18		2,54 x 12 = 30,48
	30	09 18 530 7322	09 18 530 6322		09 18 530 5322	45,9	43,26		2,54 x 14 = 35,56
	34	09 18 534 7322	09 18 534 6322		09 18 534 5322	51,0	48,34		2,54 x 16 = 40,64
	40	09 18 540 7322	09 18 540 6322		09 18 540 5322	58,6	55,96		2,54 x 19 = 48,26
	50	09 18 550 7322	09 18 550 6322		09 18 550 5322	71,5	68,66		2,54 x 24 = 60,96
	60	09 18 560 7322	09 18 560 6322		09 18 560 5322	84,2	81,36		2,54 x 29 = 73,66
	64	09 18 564 7322	09 18 564 6322		09 18 564 5322	89,3	86,44		2,54 x 31 = 78,74
	06	09 18 506 7322 001	09 18 506 6322 001		09 18 506 5322 001	15,4	12,78		2,54 x 2 = 5,08
	10	09 18 510 7322 001	09 18 510 6322 001		09 18 510 5322 001	20,5	17,86		2,54 x 4 = 10,16
	14	09 18 514 7322 001	09 18 514 6322 001		09 18 514 5322 001	25,6	22,94		2,54 x 6 = 15,24
	16	09 18 516 7322 001	09 18 516 6322 001		09 18 516 5322 001	28,1	25,48		2,54 x 7 = 17,78
	20	09 18 520 7322 001	09 18 520 6322 001		09 18 520 5322 001	33,2	30,56		2,54 x 9 = 22,86
	26	09 18 526 7322 001	09 18 526 6322 001		09 18 526 5322 001	40,8	38,18		2,54 x 12 = 30,48
	30	09 18 530 7322 001	09 18 530 6322 001		09 18 530 5322 001	45,9	43,26		2,54 x 14 = 35,56
	34	09 18 534 7322 001	09 18 534 6322 001		09 18 534 5322 001	51,0	48,34		2,54 x 16 = 40,64
	40	09 18 540 7322 001	09 18 540 6322 001		09 18 540 5322 001	58,6	55,96		2,54 x 19 = 48,26
50	09 18 550 7322 001	09 18 550 6322 001	09 18 550 5322 001	71,5	68,66	2,54 x 24 = 60,96			
60	09 18 560 7322 001	09 18 560 6322 001	09 18 560 5322 001	84,2	81,36	2,54 x 29 = 73,66			
64	09 18 564 7322 001	09 18 564 6322 001	09 18 564 5322 001	89,3	86,44	2,54 x 31 = 78,74			
D								D	
E				black				E	



All rights reserved
Department EC PD - DE

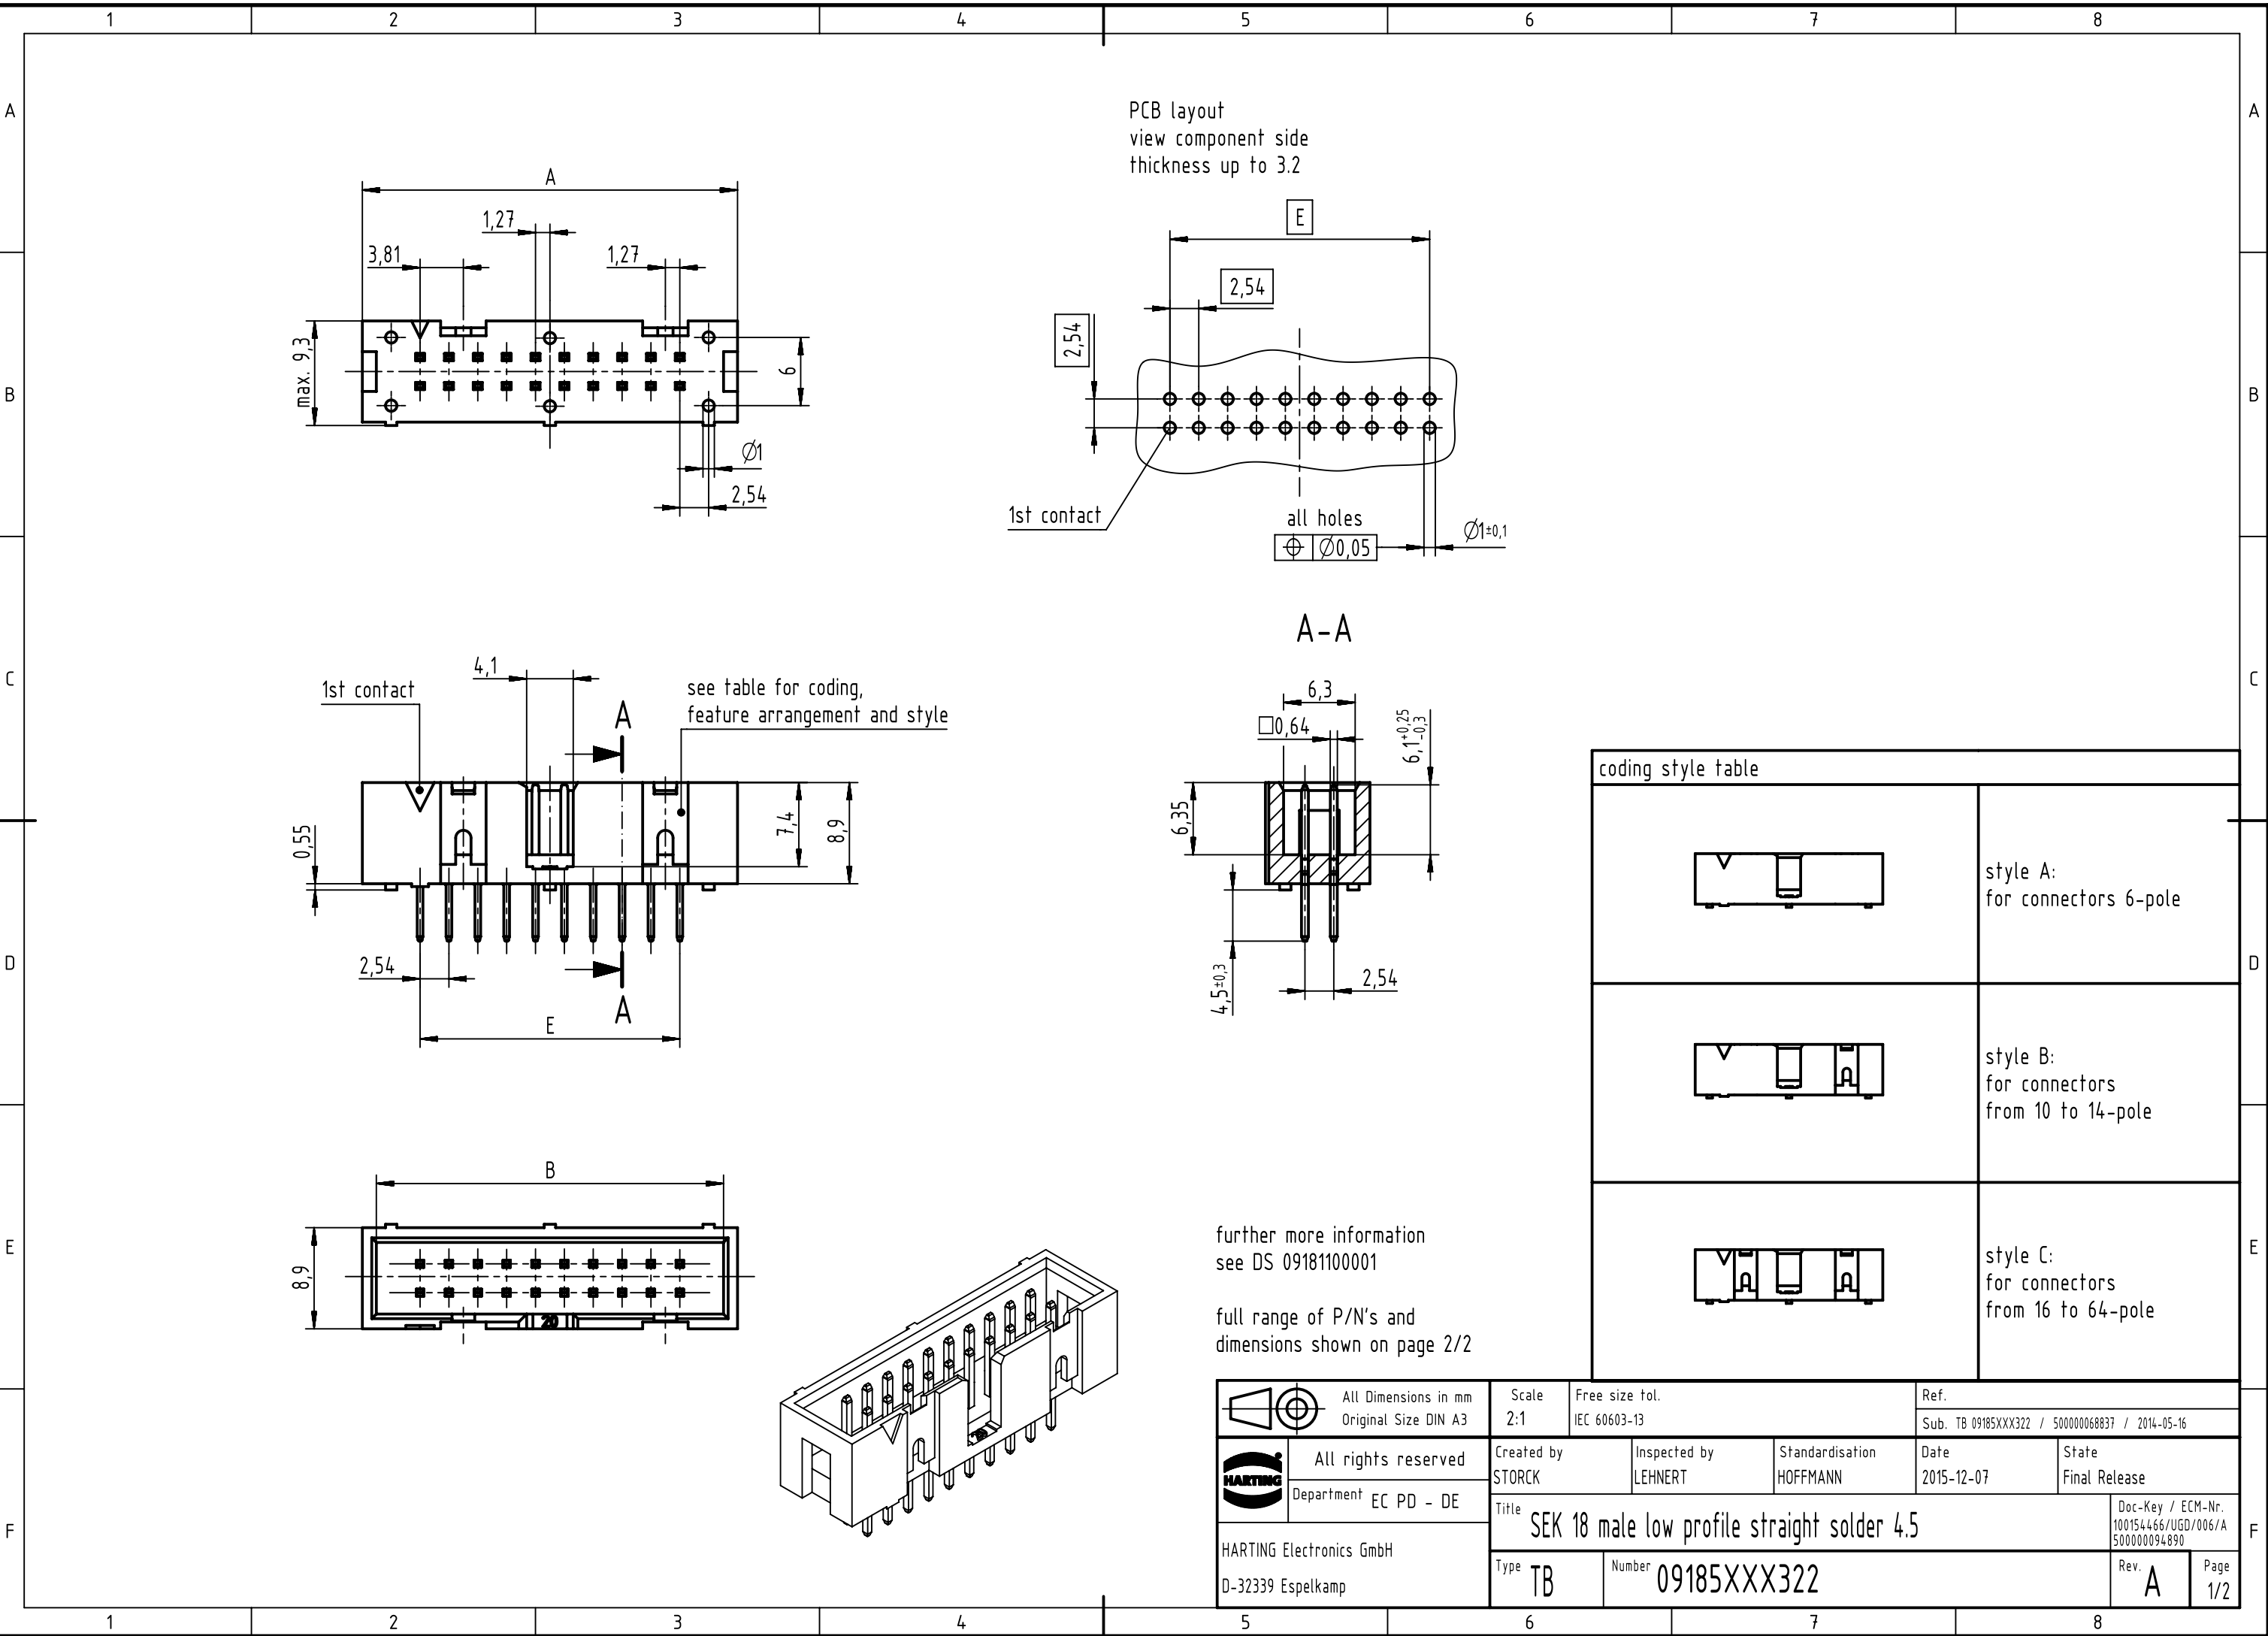

All Dimensions in mm
Original Size DIN A3

Created by
STORCK

Inspected by
LEHNERT

Standardisation
HOFFMANN

Date
2015-12-07

State
Final Release

HARTING Electronics GmbH
D-32339 Espelkamp

Title
SEK 18 male low profile straight solder 4.5

Type
TB

Number
09185XXX322

Doc-Key / ECM-Nr.
100154466/UGD/006/A
500000094890

Rev.
A

Page
2/2

Ref.
Sub. TB 09185XXX322 / 500000068837 / 2014-05-16

连接器网——汇勤电子旗下网站，一站解决电气信号连接问题

http://www.Ljqw.top/

TEL : 400-022-7728

A3