




1	2	3	4	5	6	7	8			
A								A		
B								B		
C				insulator colour	dimensions				C	
	no. of contacts	performance level			A max.	B	C	D		
		PL3	PL2		S4					
		part number	part number		part number					
	06	09 18 506 7814	09 18 506 6814		09 18 506 5814	12,2	2 x 2,54 (=5,08)	2		8,02
	10	09 18 510 7814	09 18 510 6814		09 18 510 5814	17,3	4 x 2,54 (=10,16)	3,8		13,1
	14	09 18 514 7814	09 18 514 6814		09 18 514 5814	22,4	6 x 2,54 (=15,24)	3,8		18,18
	16	09 18 516 7814	09 18 516 6814		09 18 516 5814	24,9	7 x 2,54 (=17,78)	3,8		20,72
	20	09 18 520 7814	09 18 520 6814		09 18 520 5814	30	9 x 2,54 (=22,86)	3,8		25,8
	26	09 18 526 7814	09 18 526 6814		09 18 526 5814	37,6	12 x 2,54 (=30,48)	3,8		33,42
	30	09 18 530 7814	09 18 530 6814		09 18 530 5814	42,7	14 x 2,54 (=35,56)	3,8		38,56
	34	09 18 534 7814	09 18 534 6814		09 18 534 5814	47,8	16 x 2,54 (=40,64)	3,8		43,58
	40	09 18 540 7814	09 18 540 6814		09 18 540 5814	55,4	19 x 2,54 (=48,26)	3,8		51,2
	50	09 18 550 7814	09 18 550 6814		09 18 550 5814	68,1	24 x 2,54 (=60,96)	3,8		63,9
	60	09 18 560 7814	09 18 560 6814		09 18 560 5814	80,8	29 x 2,54 (=73,66)	3,8		76,6
	64	09 18 564 7814	09 18 564 6814		09 18 564 5814	85,9	31 x 2,54 (=78,74)	3,8		81,68
D	06	09 18 506 7814 001	09 18 506 6814 001	black	12,2	2 x 2,54 (=5,08)	2	8,02	D	
	10	09 18 510 7814 001	09 18 510 6814 001		17,3	4 x 2,54 (=10,16)	3,8	13,1		
	14	09 18 514 7814 001	09 18 514 6814 001		22,4	6 x 2,54 (=15,24)	3,8	18,18		
	16	09 18 516 7814 001	09 18 516 6814 001		24,9	7 x 2,54 (=17,78)	3,8	20,72		
	20	09 18 520 7814 001	09 18 520 6814 001		30	9 x 2,54 (=22,86)	3,8	25,8		
	26	09 18 526 7814 001	09 18 526 6814 001		37,6	12 x 2,54 (=30,48)	3,8	33,42		
	30	09 18 530 7814 001	09 18 530 6814 001		42,7	14 x 2,54 (=35,56)	3,8	38,56		
	34	09 18 534 7814 001	09 18 534 6814 001		47,8	16 x 2,54 (=40,64)	3,8	43,58		
	40	09 18 540 7814 001	09 18 540 6814 001		55,4	19 x 2,54 (=48,26)	3,8	51,2		
	50	09 18 550 7814 001	09 18 550 6814 001		68,1	24 x 2,54 (=60,96)	3,8	63,9		
	60	09 18 560 7814 001	09 18 560 6814 001		80,8	29 x 2,54 (=73,66)	3,8	76,6		
	64	09 18 564 7814 001	09 18 564 6814 001		85,9	31 x 2,54 (=78,74)	3,8	81,68		
E								E		
F								F		
1	2	3	4	5	6	7	8			

		All rights reserved		Created by STORCK		Inspected by LEHNERT		Standardisation HOFFMANN		Date 2016-04-05		State Final Release	
HARTING Electronics GmbH D-32339 Espelkamp				Title SEK 18 female conn with closed end cover strain relief								Doc-Key / ECM-Nr. 100662934/UGD/009/A 500000099698	
				Type TB		Number 09185XXX814				Rev. A		Page 2/2	

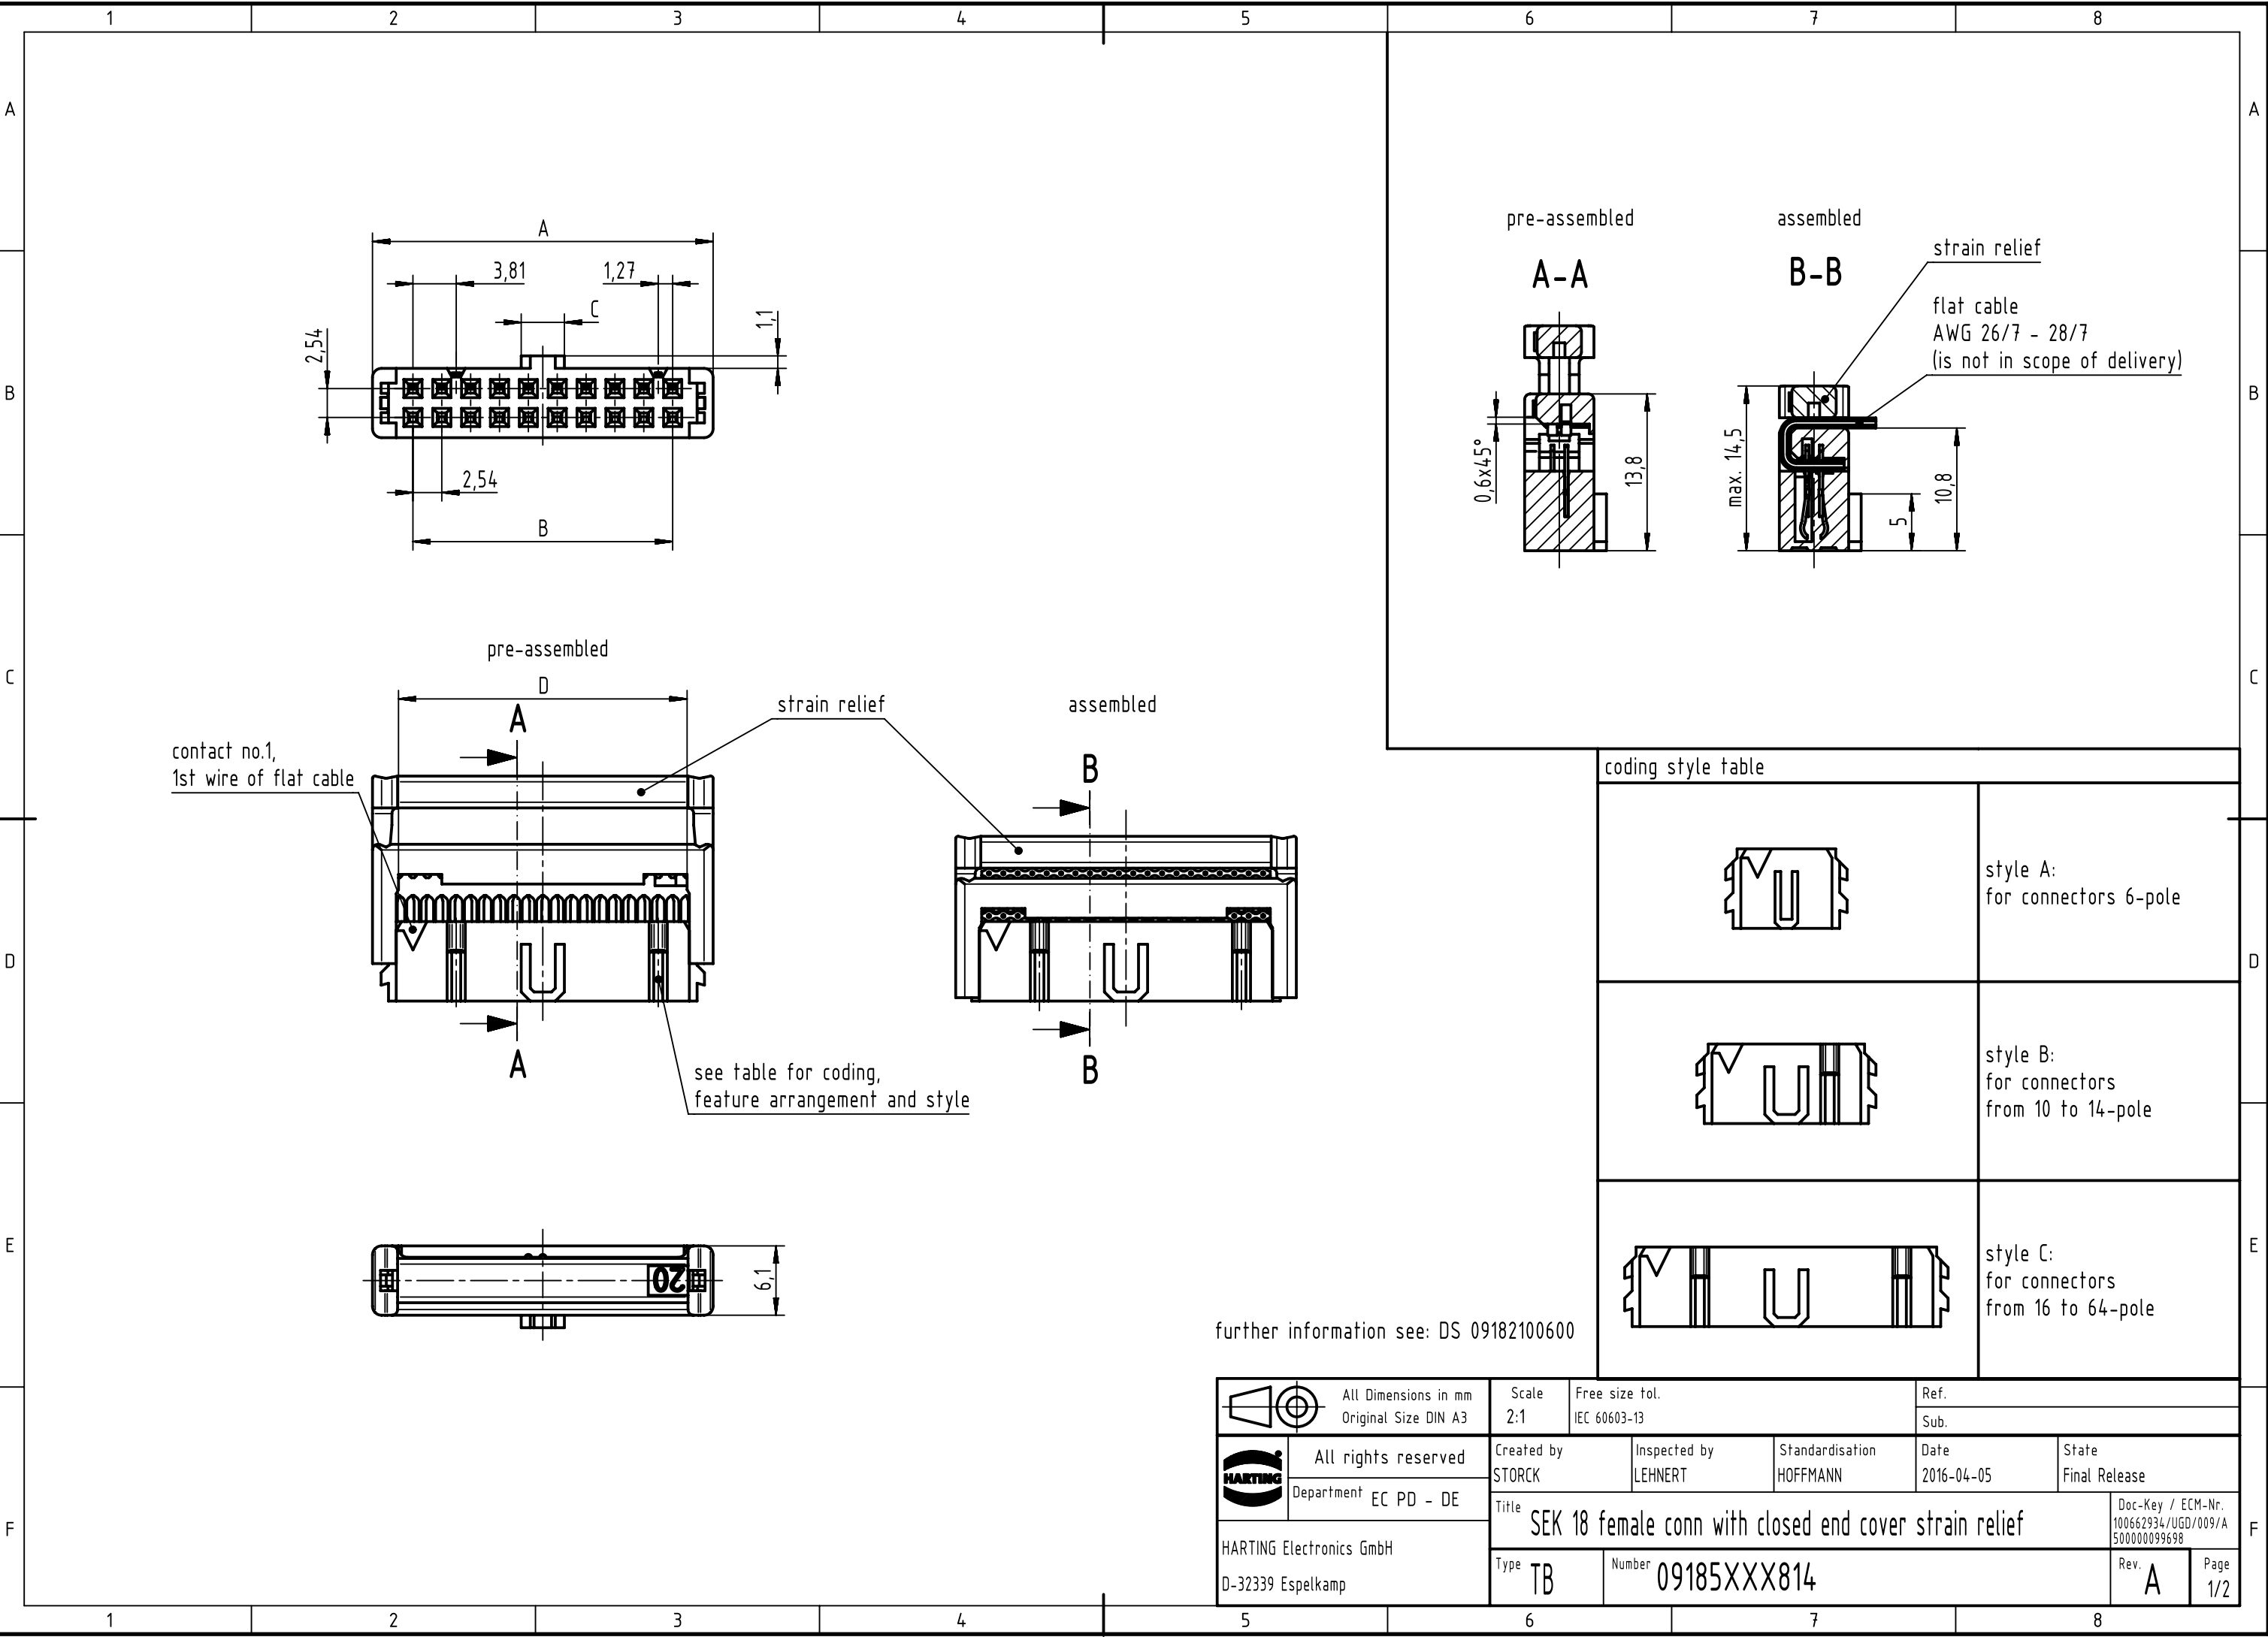

All rights reserved
Department EC PD - DE

HARTING Electronics GmbH
D-32339 Espelkamp



All Dimensions in mm
Original Size DIN A3

Scale
1:1

Free size tol.

Created by
STORCK

Inspected by
LEHNERT

Standardisation
HOFFMANN

Date
2016-04-05

State
Final Release

Title
SEK 18 female conn with closed end cover strain relief

Type
TB

Number
09185XXX814

Doc-Key / ECM-Nr.
100662934/UGD/009/A
500000099698

Rev.
A

Page
2/2