

NOTES:

- 1 THIS CONNECTOR IS DESIGNED TO MEET THE APPLICABLE PERFORMANCE REQUIREMENTS OF IEC 61076-4-101 AND BELLCORE GR-1217-CORE
- 2 RoHS DIRECTIVE COMPLIANCE, MAX SOLDERING TEMPERATURE 225°C.
- 3 CONNECTORS ARE END STACKABLE ON A 2.0 GRID.
- 4 FOR COMPLIANT CONTACT PLATED THRU HOLE REQUIREMENTS SEE THRU HOLE PLATING VIEW. MINIMUM P.C.BOARD THICKNESS 1.57 NOMINAL.
- 5 DIMENSIONS APPLY AFTER INSTALLATION IN P.C.BOARD.
- 6 CONNECTOR WITH MIXED PIN LENGTH.SELECTIVE LOADING PER PICMG™(COMPUTER TELEPHONY SPECIFICATIONS) 2.5 R1.0 APRIL 3, 1998 SEE SELECTIVE LOADING CHART AND LOADING PATTERN.
- 7 0.2 MAX. GAP PERMISSIBLE TO P.C.BOARD

SPECIFICATIONS

MATERIALS

- ① Insulators: Thermoplastic Polyester, glass filled
Rated UL 94V-0, Color: Gray
- ② Pin contacts: Copper Alloy
Finish: Mating Zone=Gold
Compliant Zone=Matte Tin
Performance Class 2= 250 cycles

PERFORMANCE CHARACTERISTICS ①

Insulation resistance: 10000 megohms minimum

Dielectric withstanding voltage(at sea level): 750 Vrms

Current rating: 1 amp @70°C, fully loaded
1.5 amp @20°C, fully loaded

Operating temperature range: -55°C to +125°C

Contact resistance: 20 milliohms maximum




COMPLIANT CONTACT

Max.Insertion Force(per contact): 22.5 lbs./100 N

Min. Retention force(per contact): 4.5 lbs./20 N



	POS.1	POS.5	POS.10	POS.15	POS.20	POS.25
ROW f	6	6	6	6	6	6
ROW e	4	4	4	4	4	4
ROW d	4	4	4	4	4	4
ROW c	4	4	4	4	4	4
ROW b	4	4	4	4	4	4
ROW a	4	4	4	4	4	4
ROW z	6	6	6	6	6	6

SELECTIVE LOADING PATTERN

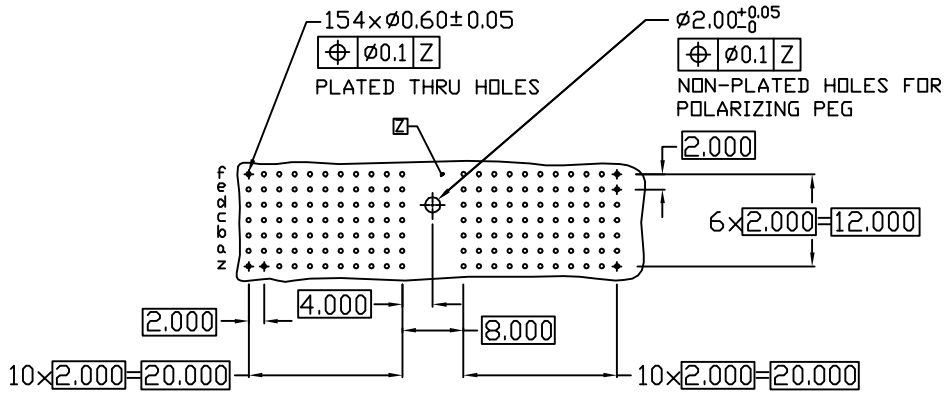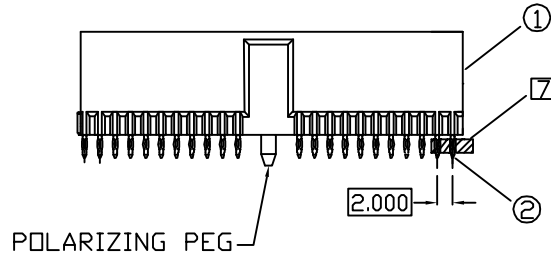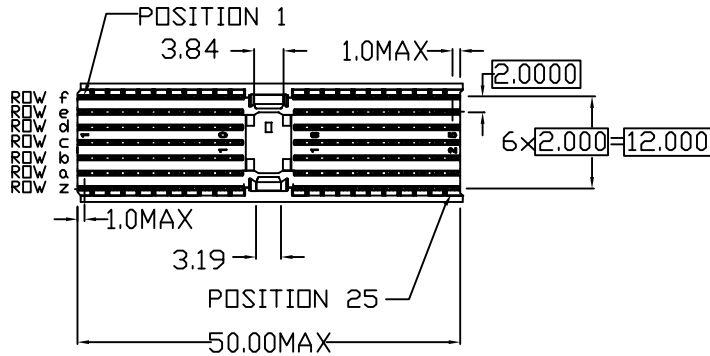

RECOMMENDED PC BOARD REQUIREMENTS
(COMPONENT SIDE BOARD SHOWN)

SELECTIVE LOADING CHART				
PIN CODE	MATING LENGTH OF CONTACTS			CONTACT TAIL LENGTHS
	SIGNAL	ALL	GROUND	
	M	P	N	L
4	.209/5.30	.323/8.20	N/A	.146/3.70
6	.327/8.30	.441/11.20	.327/8.30	.146/3.70

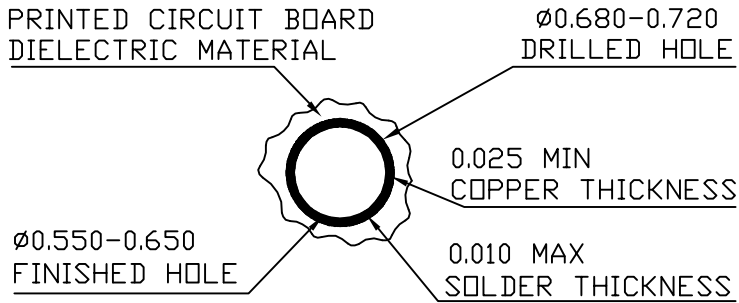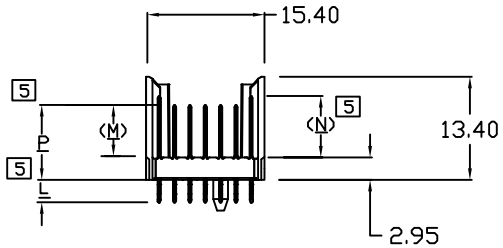

THRU HOLE PLATING
SCALE 10:1

REV.	ECN. NO.	DESCRIPTION	DATE	DRAWN	APPD
A	**	Release	8/23'10	何潔賢	楊海文

DESIGN UNITS		NAME:		NEXTRON®	
mm INCH		2MM HEADER A TYPE		NEXTRONICS ENGINEERING CORP.	
GENERAL TOLERANCES: (UNLESS SPECIFIED)		PART NO:		TITLE:	
		NX5A0AE01A11AA		CUSTOMER DWG	
4 PLACE ±0.05 ±.**		APPD: 楊海文 8/23'10		DWG. NO:	
3 PLACE ±0.10 ±.**		CHKD: 廖小瓊 8/23'10		010-0000-713-NX5A0AE01A11AA	
2 PLACE ±0.20 ±.**		DRAWN: 何潔賢 8/23'10		SCALE: SHEET: REV.:	
1 PLACE ±0.30 ±.**				1 / 1 1 / 1 A	
ANGULAR: X°±.** X°±.**					