
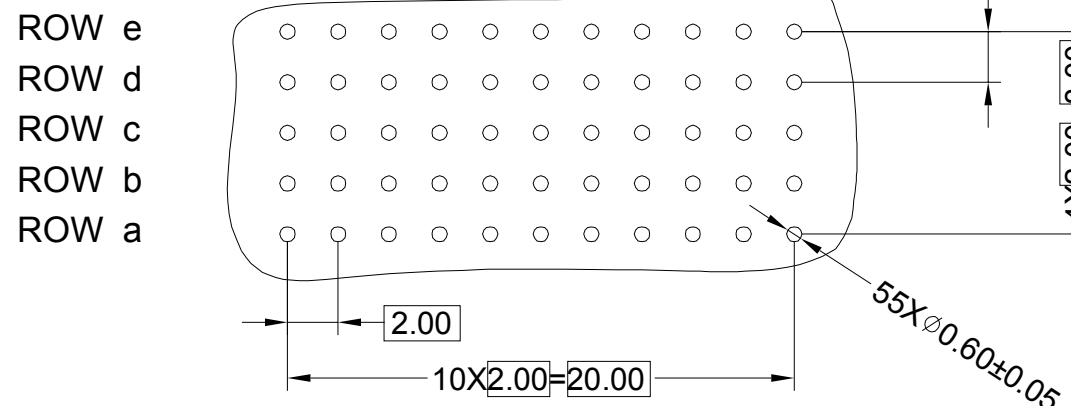


NOTES:

1. ALL DIMENSION ARE IN mm.
2. MATERIAL:
HOUSING: THERMOPLASTIC(94V-0) COLOR: GRAY
CONTACT: COPPER ALLOY
3. FINISH:
CONTACT AREA: GOLD PLATING;
PRESS FIT AREA: MATTE TIN PLATING.
4. ENGAGING AND SEPARATING FORCES PER IEC 61076-4-101.
5. ROHS DIRECTIVE COMPLIANCE.
6. MAX SOLDERING TEMPERATURE 225°C.
7. PERFORMANCE CHARACTERISTICS
INSULATION RESISTANCE: 10,000 MEGOHMS MINIMUM
DIELECTRIC WITHSTANDING VOLTAGE(AT SEA LEVEL): 750 Vrms
CURRENT RATING: 1 AMP AT 70°C, FULLY LOADED
1.5 AMP AT 20°C, FULLY LOADED
OPERATING TEMPERATURE RANGE: -55°C TO +125°C
CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM

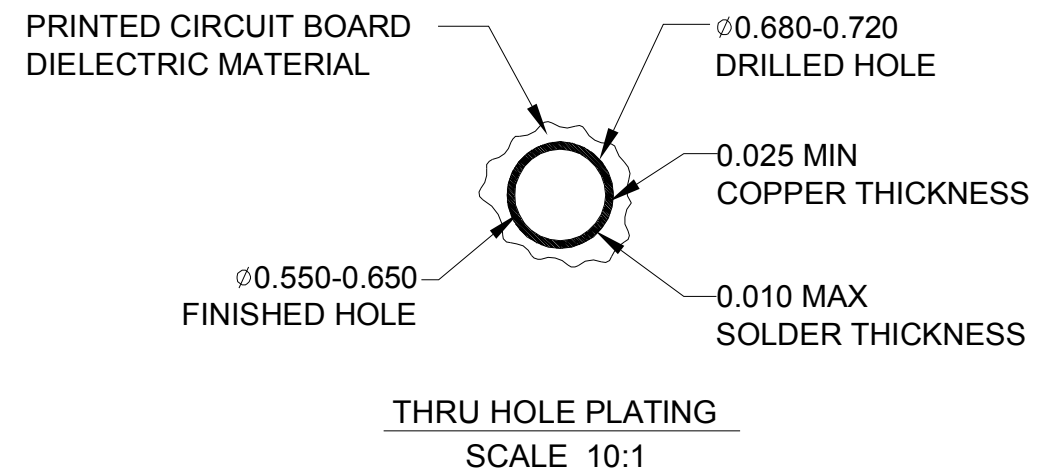

DESIGN UNITS ■ mm □ INCH		NAME: 2MM 180° SOCKET C TYPE NO SHIELD	nexttron NEXTRONICS ENGINEERING CORP.	
GENERAL TOLERANCES: (UNLESS SPECIFIED)		PART NO: NX7C0AA01A0AF	TITLE: CUSTOMER DWG	C
	mm	INCH	DWG. NO: 010-0000-856-NX7C0AA01A0AF	
4 PLACE	±.**	±.**	APPD: 楊海文 5/20'11	SCALE: 1/1
3 PLACE	±.**	±.**	CHKD: 楊海文 5/20'11	SHEET: 1/1
2 PLACE	±0.20	±.**	DRAWN: 廖小瓊 5/20'11	REV.: X1
1 PLACE	±0.30	±.**		
ANGULAR:	X°±3°	.X°±.**		

X1	***	New Release	5/20'11	廖小瓊	楊海文
REV.	ECN. NO.	DESCRIPTION	DATE	DRAWN	APPD