

NOTES:

- ① THIS CONNECTOR IS DESIGNED TO MEET THE APPLICABLE PERFORMANCE REQUIREMENTS OF IEC 61076-4-101 AND BELLCORE GR-1217-CORE
- 2 RoHS DIRECTIVE COMPLIANCE, MAX SOLDERING TEMPERATURE 225°C.
- 3 CONNECTORS ARE END STACKABLE ON A 2.0 GRID.
- 4 FOR COMPLIANT CONTACT PLATED THRU HOLE REQUIREMENTS SEE THRU HOLE PLATING VIEW. MINIMUM P.C.BOARD THICKNESS 1.57 NOMINAL.
- 5 OPTIONAL BOTTOM SHIELD SOLD SEPARATELY
- ⑥ NO GAP PERMISSIBLE TO PC BOARD.


SPECIFICATIONS

MATERIALS

- ① Insulators:
Thermoplastic Polyester, glass filled
Rated UL 94V-0, Color: Gray
- ② Pin contacts:
Copper Alloy
Finish: Mating Zone=Gold
Compliant Zone=Matte Tin
Performance Class 2= 250 cycles

PERFORMANCE CHARACTERISTICS ①

Insulation resistance: 10,000 megohms minimum
Dielectric withstanding voltage(at sea level): 750 Vrms
Current rating: 1 amp @70°C, fully loaded
1.5 amp @20°C, fully loaded
Operating temperature range: -55°C to +125°C
Contact resistance: 20 milliohms maximum

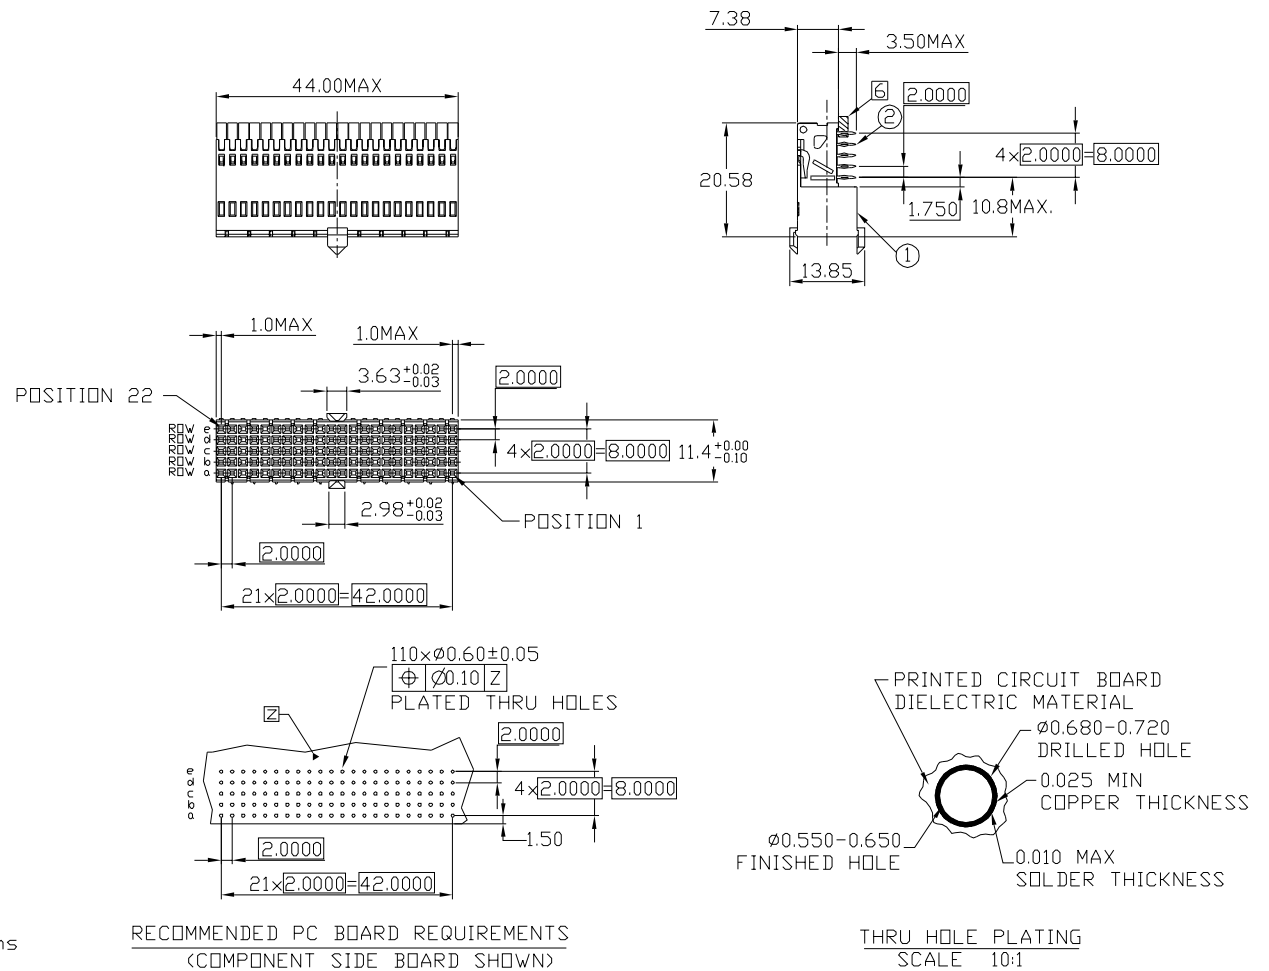

RECOMMENDED PC BOARD REQUIREMENTS
(COMPONENT SIDE BOARD SHOWN)

THRU HOLE PLATING
SCALE 10:1

B	ECN-130093	6/4'13	Seawen
A	RELEASE	11/18'11	Seawen
REV.	DESCRIPTION	DATE	APPD

UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH	NAME: 2MM SOCKET AB22 WITHOUT SHIELD	 NEXTRONICS ENGINEERING CORP. TITLE: CUSTOMER DWG.	
GENERAL TOLERANCES: (UNLESS SPECIFIED)	PART NO: NX9ABBA10A0AF		
4 PLACE ±0.05 ±.***	APPD: 楊海文 6/4'13	DWG NO: 010-0000-983-NX9ABBA10A0AF	C
3 PLACE ±0.10 ±.***	CHKD: 廖小瓊 6/4'13	SCALE: 1/1	SHEET: 1/1
2 PLACE ±0.20 ±.***	DRAWN: 何潔賢 6/4'13	REV.:	B
1 PLACE ±0.30 ±.***			
ANGULAR: X°±** X°±**			