



## 2.5mm Contact Spacing, Battery Connectors

### EIO-CL26 H TYPE SERIES

#### ■ FEATURES

- 2.5mm contact spacing.
- No. of contacts: 4~6pin.
- Available in embossed type for automatic mounting.

#### ■ SPECIFICATIONS

##### 1.ELECTRICAL

- Voltage rating: 200V
- Current rating: 1.5A
- Contact resistance: 25mΩ max.
- Insulation resistance: 10MΩ min.

##### 2.MECHANICAL

- Durability: Mate & Unmate with applicability for 10000 times, Contact resistance: 25mΩ max.
- Normal Force: Measure normal force at contact point deflection 1.05mm, Requirements: 112.2gf min., 153gf max.
- Retention Force: 200gf min.

#### ■ MATERIALS

##### 1.MATERIAL

- Contacts: Copper Alloy
- Insulator Housing: High Temp. Thermoplastic

##### 2.PLATING

###### Contact:

- Nickel In All Area
- Tin & Au over Nickel (RoHS Compliant)

#### ■ PACKING

##### 1.Packing method

- All connectors are packed in reel method.

EIO-CL26-S004H6




EIO-CL26-S004H3





■ PART NUMBERING SYSTEM

EIO - CL26 - S 004 H 3 A - 3Z E 1000

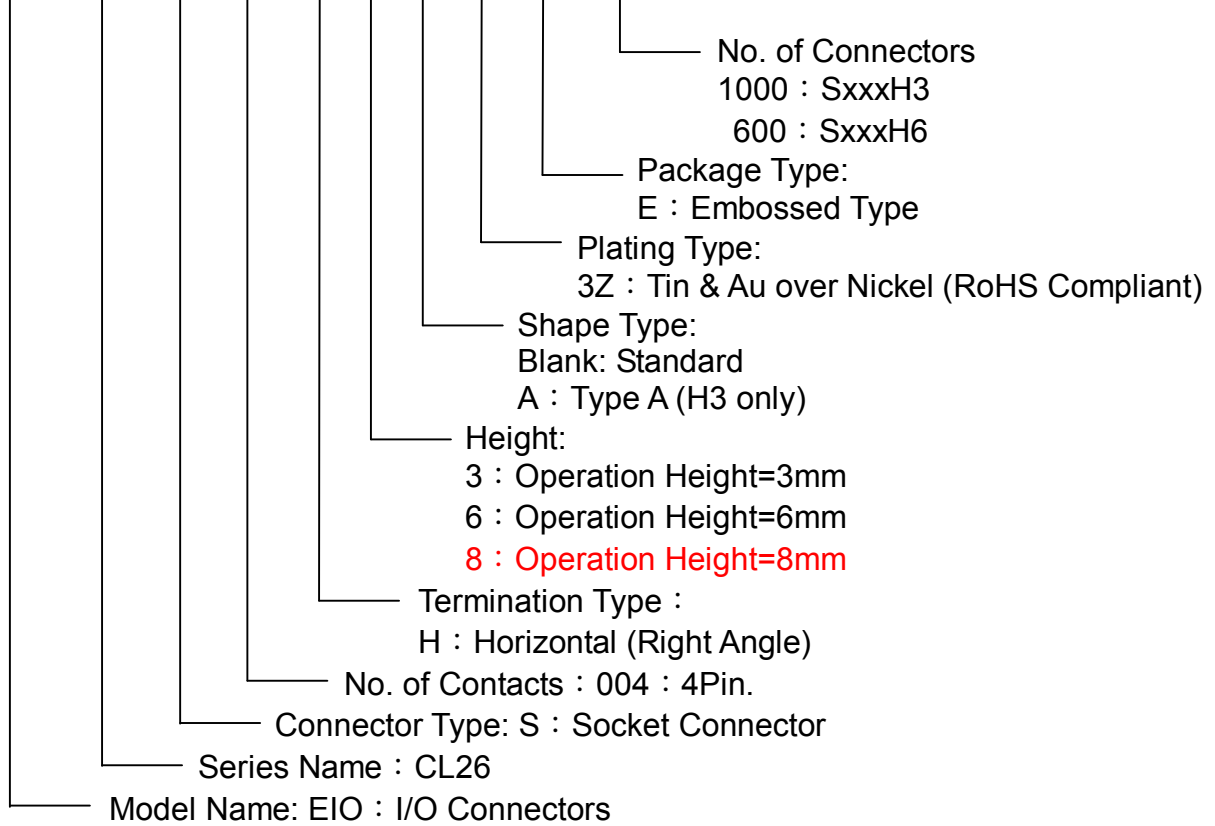

■ DIMENSIONS UNIT : mm

